

A large satellite dish antenna is mounted on a tall metal tower. The dish is dark and has a grid-like structure. The background is a soft, hazy sunset or sunrise sky with warm colors like orange, yellow, and blue. The overall scene is slightly blurred, giving it a cinematic feel.

Campi Elettromagnetici

**Corso di Laurea in Ingegneria Informatica,
Biomedica e delle Telecomunicazioni**

a.a. 2021-2022 - Laurea “Triennale” – Secondo semestre - Secondo anno

Università degli Studi di Napoli “Parthenope”

Stefano Perna

Color legend

New formulas, important considerations,
important formulas, important concepts

Very important for the discussion

Memo

Mathematical tools to be exploited

Mathematics

THEOREMS

Poynting

Time domain – Phasor domain

Uniqueness (Interior problem – Exterior problem)

Time domain – Phasor domain

Equivalence

Phasor domain

Image Theory

Reciprocity

Phasor domain

Maxwell Equations (Spectral Domains)



James Clerk Maxwell 1831-1879

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}} = -j\omega\vec{\mathbf{B}} \\ \nabla \times \vec{\mathbf{H}} = j\omega\vec{\mathbf{D}} + \vec{\mathbf{J}} \\ \nabla \cdot \vec{\mathbf{D}} = \rho \\ \nabla \cdot \vec{\mathbf{B}} = 0 \end{array} \right.$$

Maxwell Equations (Spectral Domains)

Magnetic Sources



James Clerk Maxwell 1831-1879


$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}} = -j\omega\vec{\mathbf{B}} - \vec{\mathbf{J}}_m \\ \nabla \times \vec{\mathbf{H}} = j\omega\vec{\mathbf{D}} + \vec{\mathbf{J}} \\ \nabla \cdot \vec{\mathbf{D}} = \rho \\ \nabla \cdot \vec{\mathbf{B}} = \rho_m \end{array} \right.$$

$$[\vec{\mathbf{e}}(\vec{\mathbf{r}}, t)]: \frac{\text{Volt}}{m} \quad [\vec{\mathbf{b}}(\vec{\mathbf{r}}, t)]: \frac{\text{Weber}}{m^2}$$

$$[\vec{\mathbf{j}}_m(\vec{\mathbf{r}}, t)]: \frac{\text{Volt}}{m^2} \quad [\rho_m(\vec{\mathbf{r}}, t)]: \frac{\text{Weber}}{m^3}$$

Equivalence theorem


$$\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0$$



Consider a source distribution $\vec{\mathbf{J}}_0$ with its associated electromagnetic field $(\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$

Equivalence theorem

$$\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0$$

$$\vec{\mathbf{J}}_0$$


Consider a source distribution $\vec{\mathbf{J}}_0$ with its associated electromagnetic field $(\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$

Equivalence theorem


$$\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0$$

$$\vec{\mathbf{J}}_0$$

Consider a source distribution $\vec{\mathbf{J}}_0$ with its associated electromagnetic field $(\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$

$$\vec{\mathbf{J}}_0 \rightarrow (\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$$


Equivalence theorem

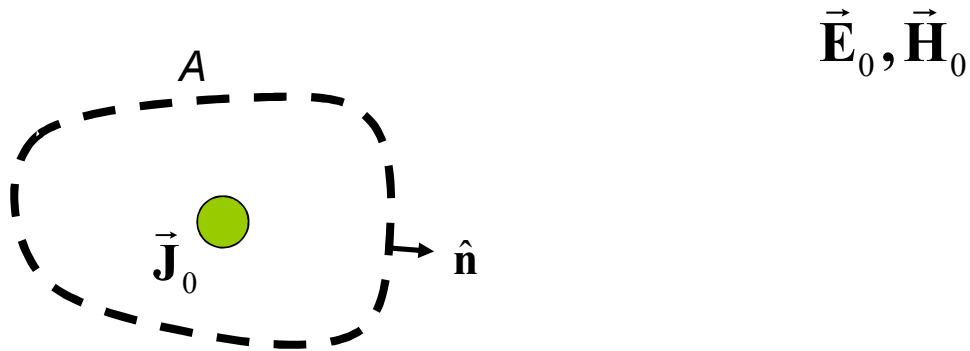

Consider a source distribution \vec{J}_0 with its associated electromagnetic field (\vec{E}_0, \vec{H}_0)
Consider a (smooth) surface A with an everywhere defined unit normal \hat{n}

$$\vec{J}_0 \rightarrow (\vec{E}_0, \vec{H}_0)$$

Equivalence theorem

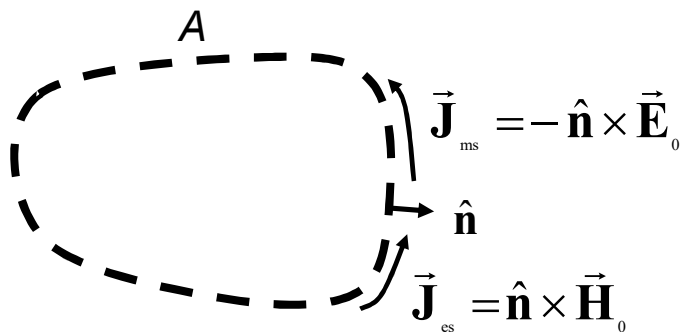

$$[\vec{\mathbf{e}}(\vec{\mathbf{r}}, t)]: \frac{\text{Volt}}{m}$$

$$[\vec{\mathbf{j}}_m(\vec{\mathbf{r}}, t)]: \frac{\text{Volt}}{m^2}$$


$$[\vec{\mathbf{j}}_{ms}(\vec{\mathbf{r}}, t)]: \frac{\text{Volt}}{m}$$

Consider a source distribution $\vec{\mathbf{J}}_0$ with its associated electromagnetic field $(\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$
 Consider a (smooth) surface A with an everywhere defined unit normal $\hat{\mathbf{n}}$

The original sources $\vec{\mathbf{J}}_0$ enclosed in A can be removed and substituted by equivalent sources, i.e., electric $\vec{\mathbf{J}}_{es} = \hat{\mathbf{n}} \times \vec{\mathbf{H}}_0$ and magnetic $\vec{\mathbf{J}}_{ms} = -\hat{\mathbf{n}} \times \vec{\mathbf{E}}_0$ current densities distributed over the surface A .

$$\vec{\mathbf{J}}_0 \rightarrow (\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$$

Equivalence theorem

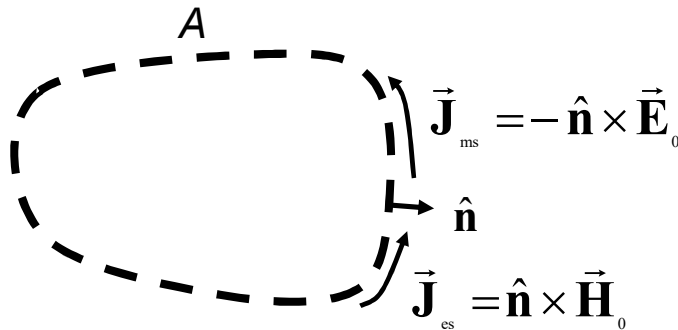

$$[\vec{h}(\vec{\mathbf{r}}, t)]: \frac{\text{Ampere}}{m} \quad [\vec{\mathbf{j}}_e(\vec{\mathbf{r}}, t)]: \frac{\text{Ampere}}{m^2}$$

$$[\vec{\mathbf{j}}_{ms}(\vec{\mathbf{r}}, t)]: \frac{\text{Volt}}{m} \quad [\vec{\mathbf{j}}_{es}(\vec{\mathbf{r}}, t)]: \frac{\text{Ampere}}{m}$$


Consider a source distribution $\vec{\mathbf{J}}_0$ with its associated electromagnetic field $(\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$

Consider a (smooth) surface A with an everywhere defined unit normal $\hat{\mathbf{n}}$

The original sources $\vec{\mathbf{J}}_0$ enclosed in A can be removed and substituted by equivalent sources, i.e., electric $\vec{\mathbf{J}}_{es} = \hat{\mathbf{n}} \times \vec{\mathbf{H}}_0$ and magnetic $\vec{\mathbf{J}}_{ms} = -\hat{\mathbf{n}} \times \vec{\mathbf{E}}_0$ current densities distributed over the surface A .

$$\vec{\mathbf{J}}_0 \rightarrow (\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$$

Equivalence theorem

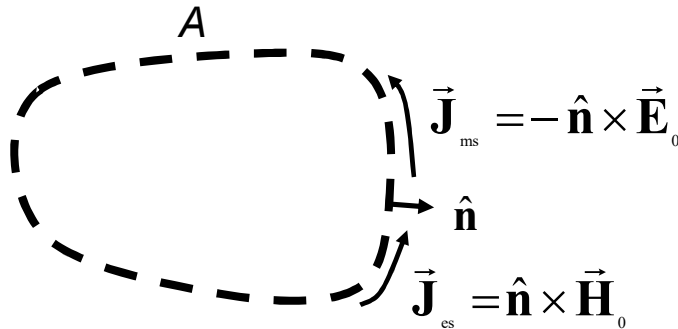

Consider a source distribution $\vec{\mathbf{J}}_0$ with its associated electromagnetic field $(\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$
Consider a (smooth) surface A with an everywhere defined unit normal $\hat{\mathbf{n}}$

The original sources $\vec{\mathbf{J}}_0$ enclosed in A can be removed and substituted by equivalent sources, i.e., electric $\vec{\mathbf{J}}_{es} = \hat{\mathbf{n}} \times \vec{\mathbf{H}}_0$ and magnetic $\vec{\mathbf{J}}_{ms} = -\hat{\mathbf{n}} \times \vec{\mathbf{E}}_0$ current densities distributed over the surface A .

$$\vec{\mathbf{J}}_0 \rightarrow (\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$$

Maxwell Equations (Spectral Domains)

Magnetic Sources




James Clerk Maxwell 1831-1879

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}} = -j\omega\vec{\mathbf{B}} - \vec{\mathbf{J}}_m \\ \nabla \times \vec{\mathbf{H}} = j\omega\vec{\mathbf{D}} + \vec{\mathbf{J}} \\ \nabla \cdot \vec{\mathbf{D}} = \rho \\ \nabla \cdot \vec{\mathbf{B}} = \rho_m \end{array} \right.$$

$$[\vec{\mathbf{e}}(\vec{\mathbf{r}}, t)]: \frac{\text{Volt}}{m} \quad [\vec{\mathbf{b}}(\vec{\mathbf{r}}, t)]: \frac{\text{Weber}}{m^2}$$

$$[\vec{\mathbf{j}}_m(\vec{\mathbf{r}}, t)]: \frac{\text{Volt}}{m^2} \quad [\rho_m(\vec{\mathbf{r}}, t)]: \frac{\text{Weber}}{m^3}$$


Equivalence theorem

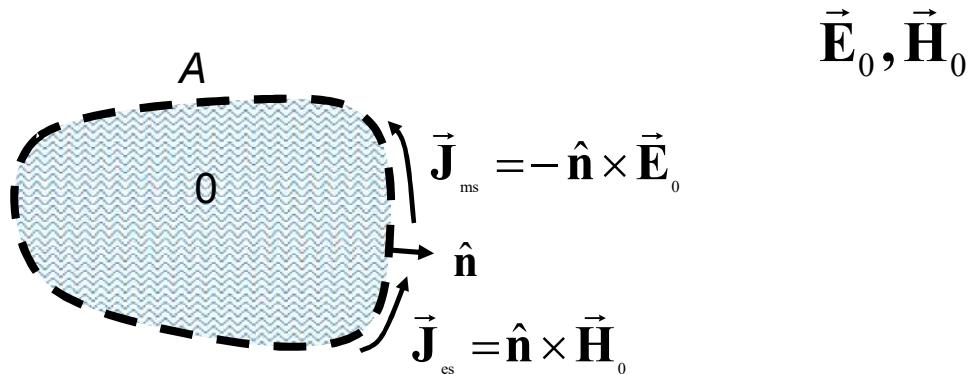


The Equivalence Theorem states that the equivalent sources $\vec{\mathbf{J}}_{es}$ and $\vec{\mathbf{J}}_{ms}$ generate a field $(\vec{\mathbf{E}}', \vec{\mathbf{H}}')$ coincident with $(\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$ outside A and identically equal to zero inside

$$\vec{\mathbf{J}}_0 \rightarrow (\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$$

Equivalence theorem

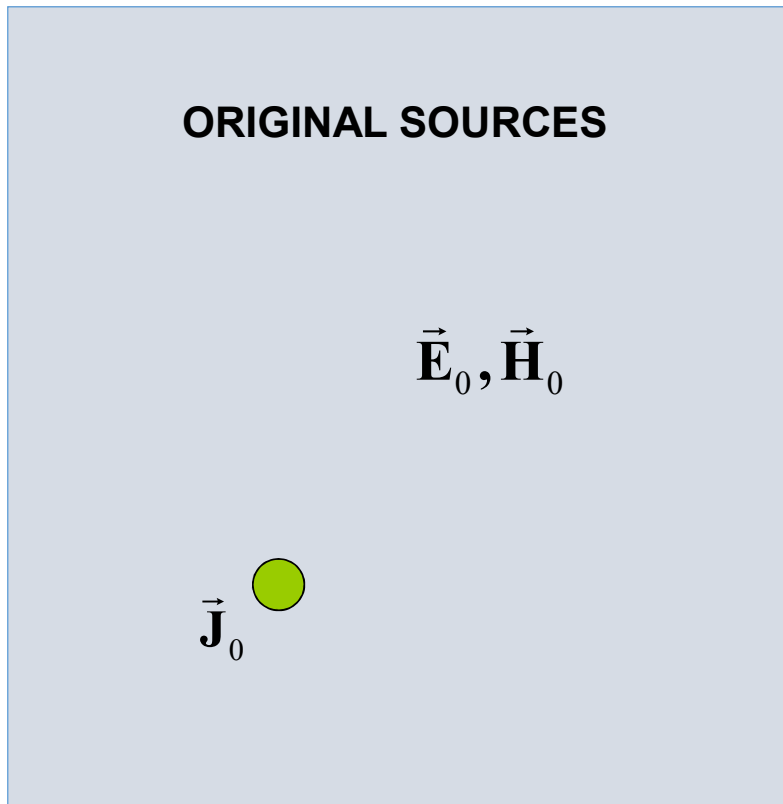


Equivalence theorem

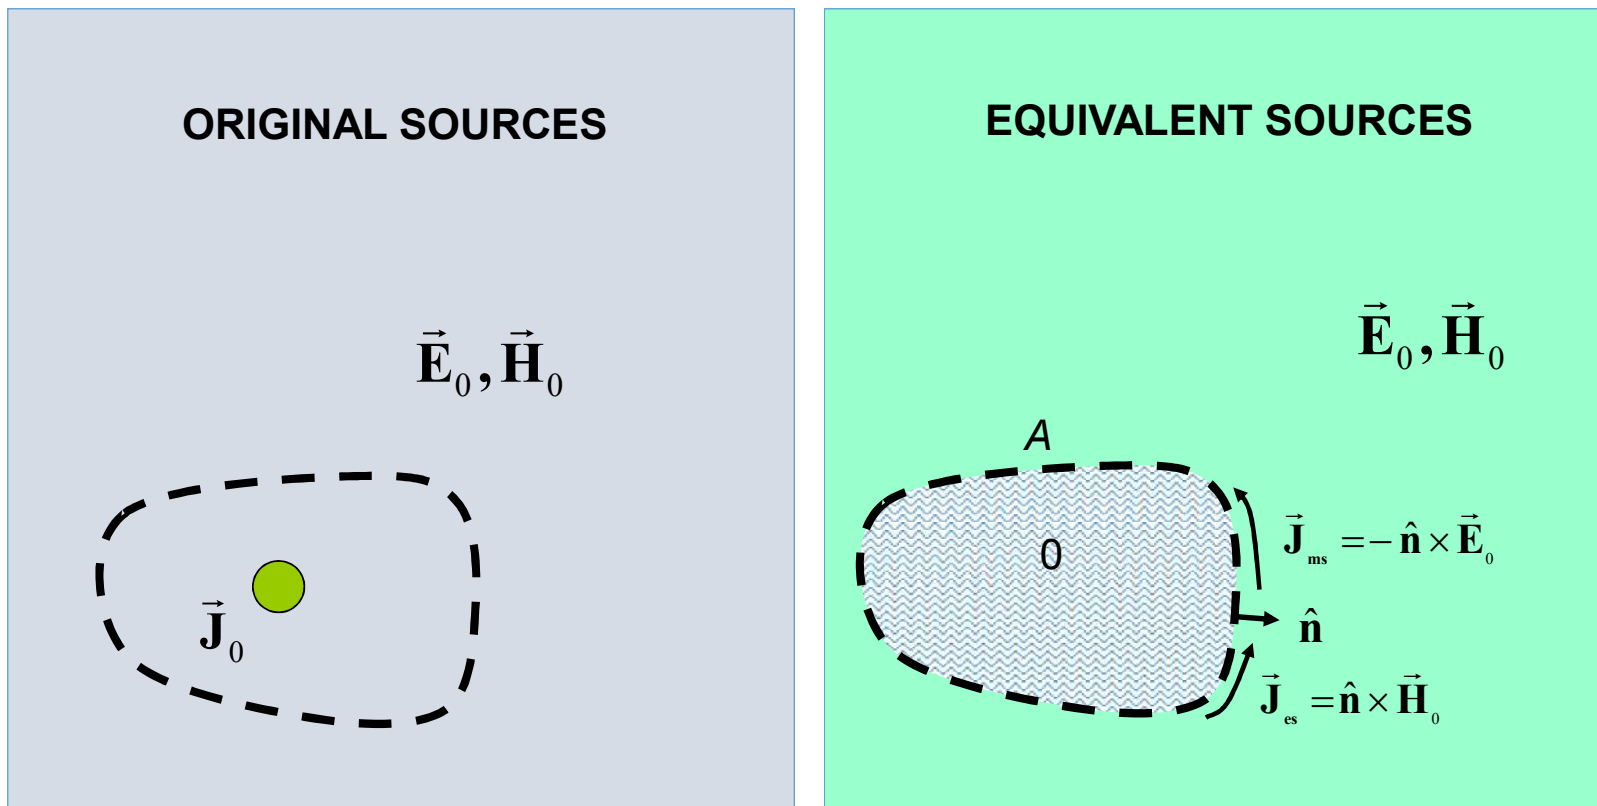

Equivalence theorem


It's a powerful theorem that allows calculating the e.m. field in all the space, starting from the knowledge of its value just on a surface.

Equivalence theorem

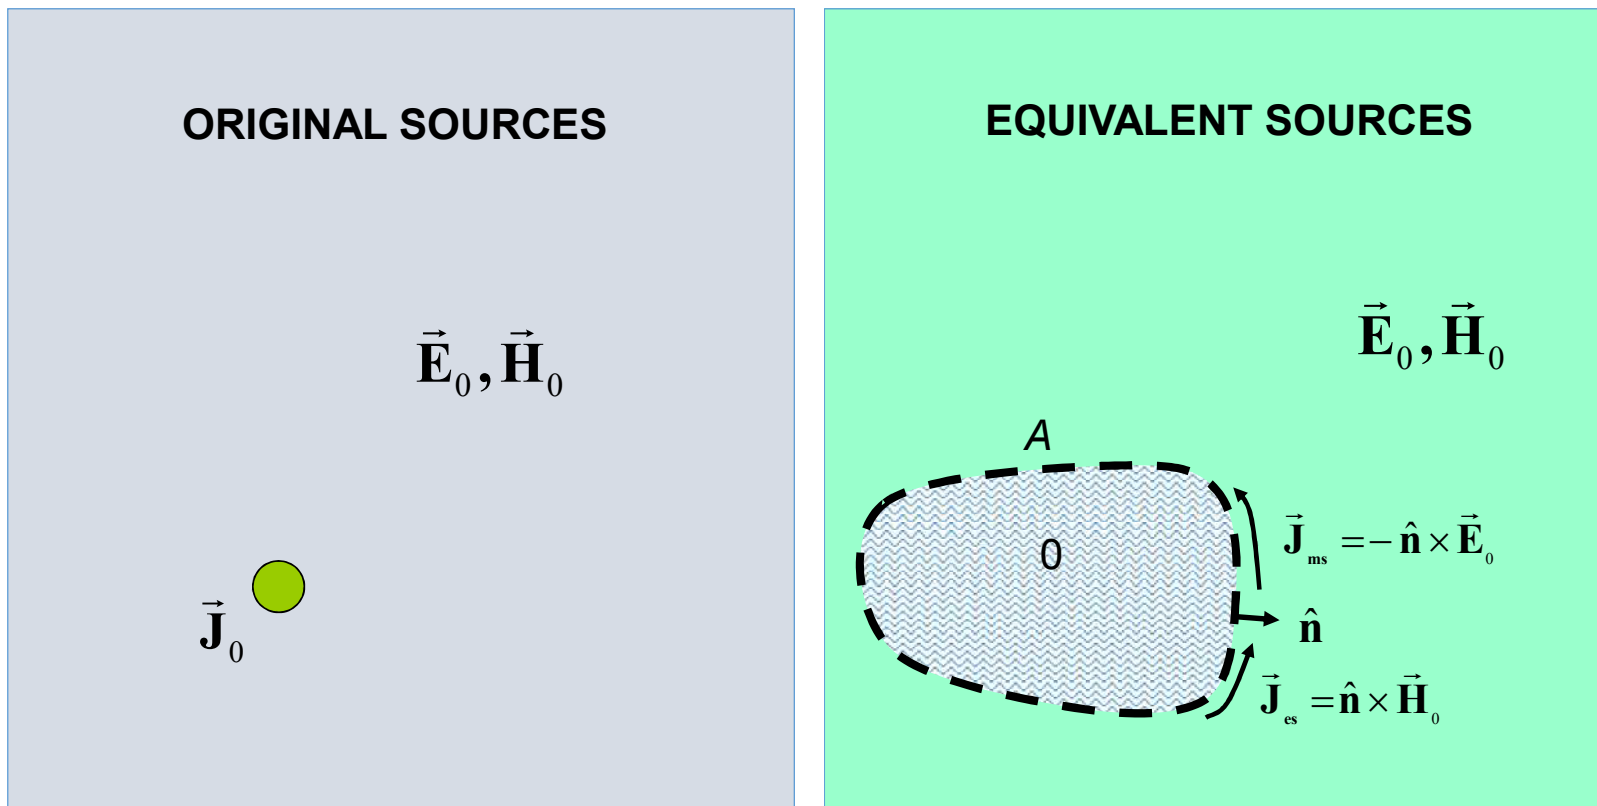



Equivalence theorem

Alternative formulation

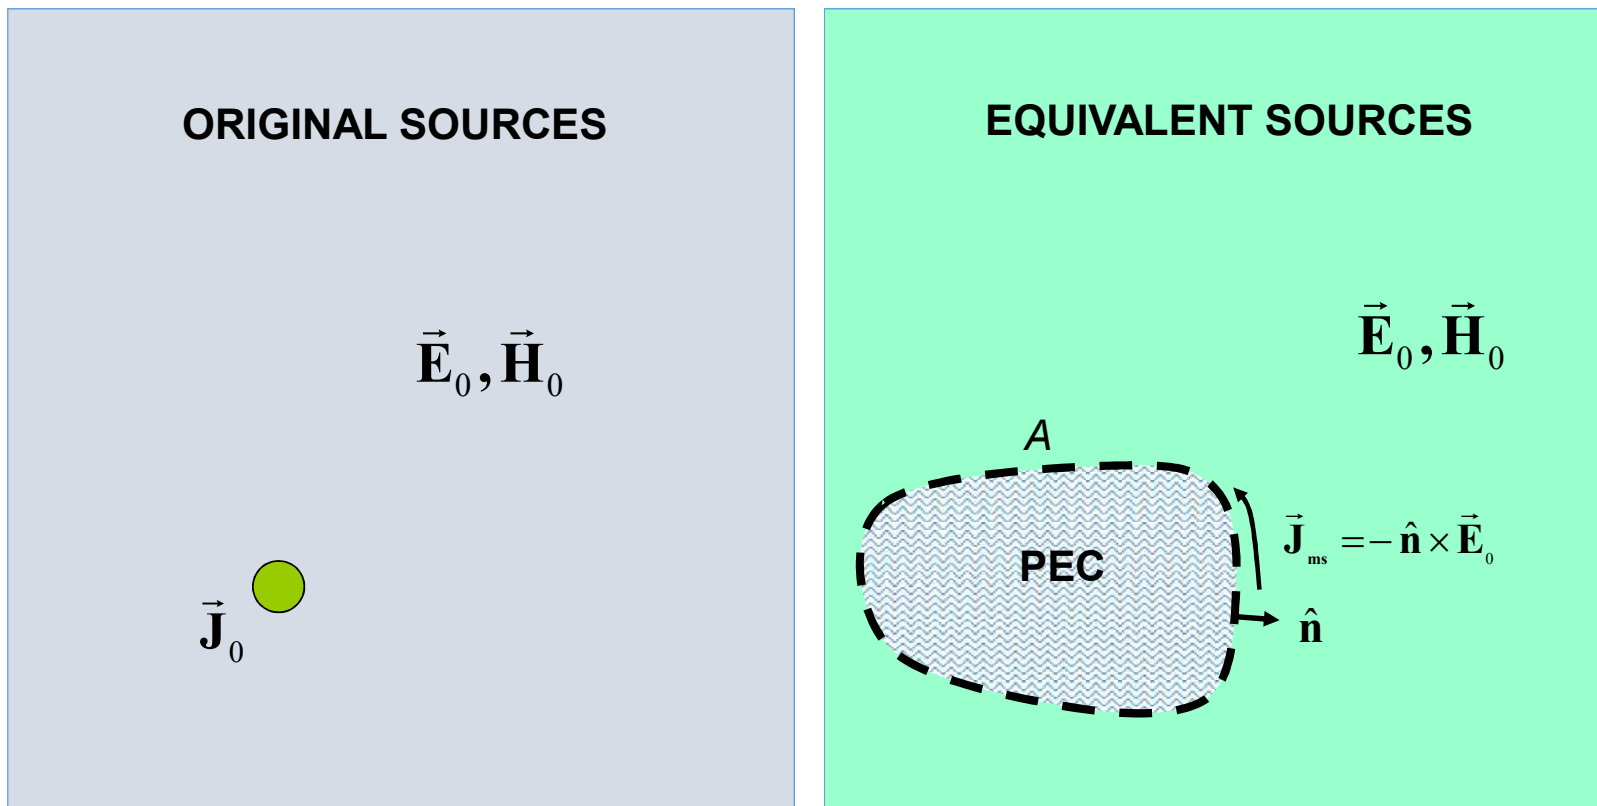

Equivalence theorem


More general formulation



$$\vec{\mathbf{J}}_A + \vec{\mathbf{J}}_B \rightarrow (\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$$

Equivalence theorem


More general formulation

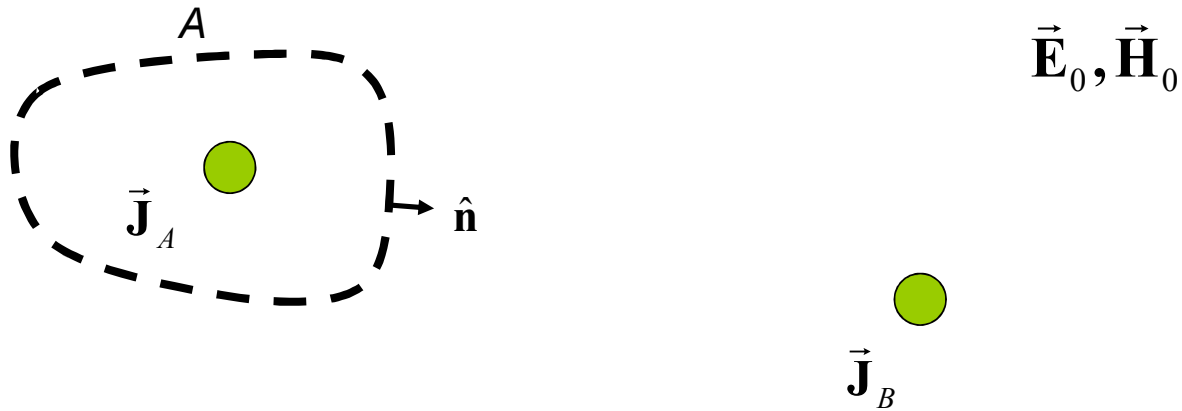

$$\vec{J}_A + \vec{J}_B \rightarrow (\vec{E}_0, \vec{H}_0)$$

Equivalence theorem


More general formulation

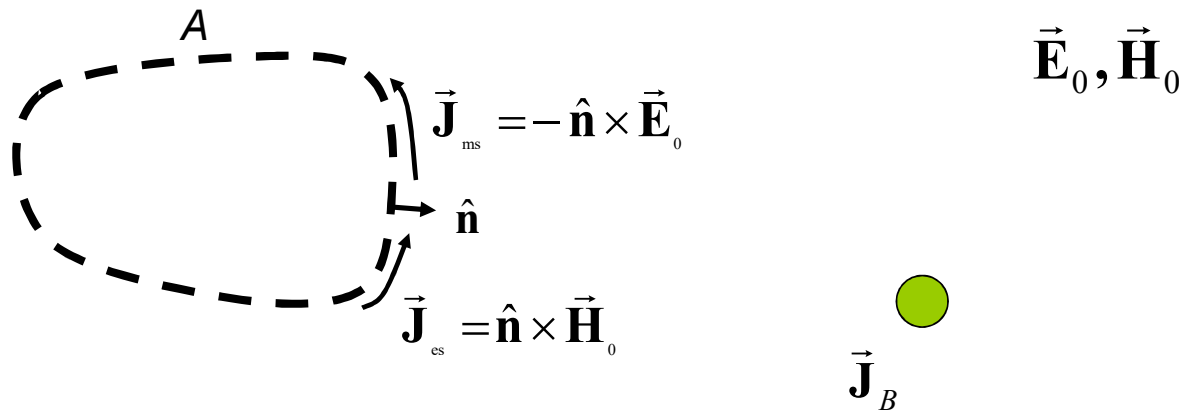

$$\vec{\mathbf{J}}_A + \vec{\mathbf{J}}_B \rightarrow (\vec{\mathbf{E}}_0, \vec{\mathbf{H}}_0)$$

Equivalence theorem

More general formulation

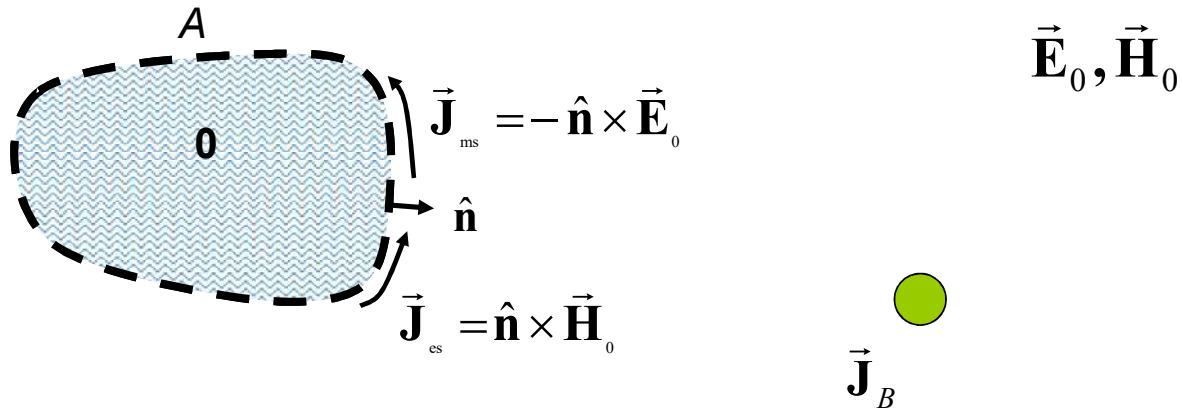

$$\vec{J}_A + \vec{J}_B \rightarrow (\vec{E}_0, \vec{H}_0)$$

THEOREMS

Poynting

Time domain – Phasor domain

Uniqueness (Interior problem – Exterior problem)

Time domain – Phasor domain

Equivalence

Phasor domain

Image Theory

Reciprocity

Phasor domain

Image theory

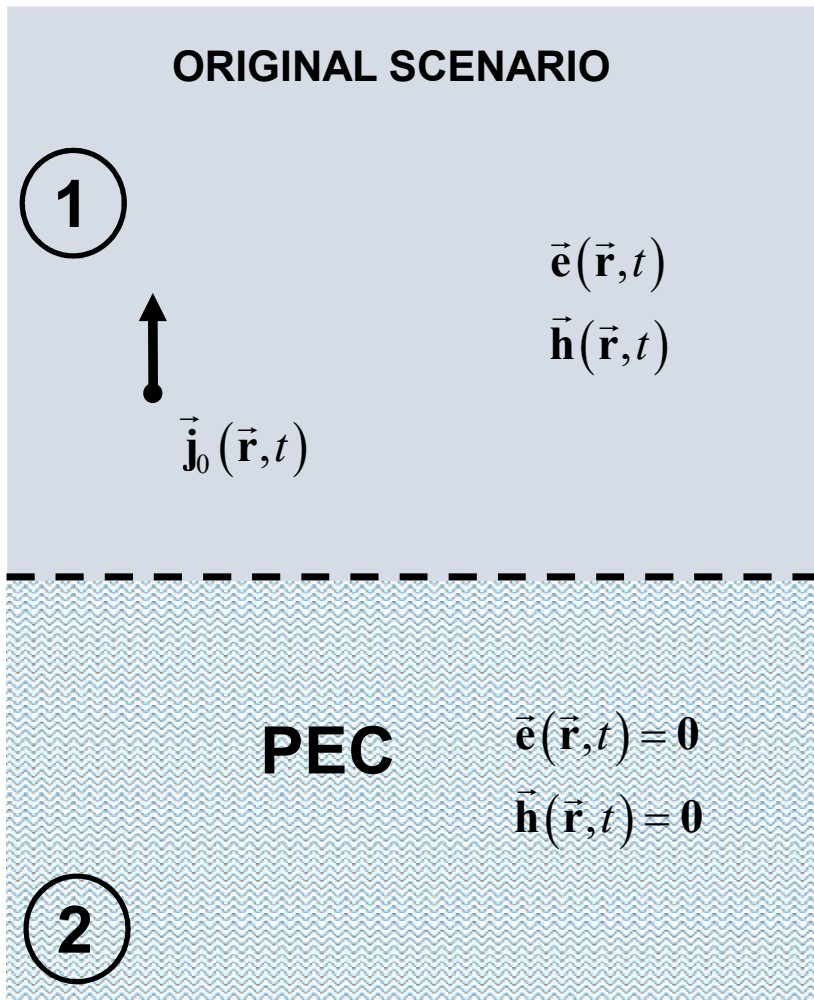


Image theory

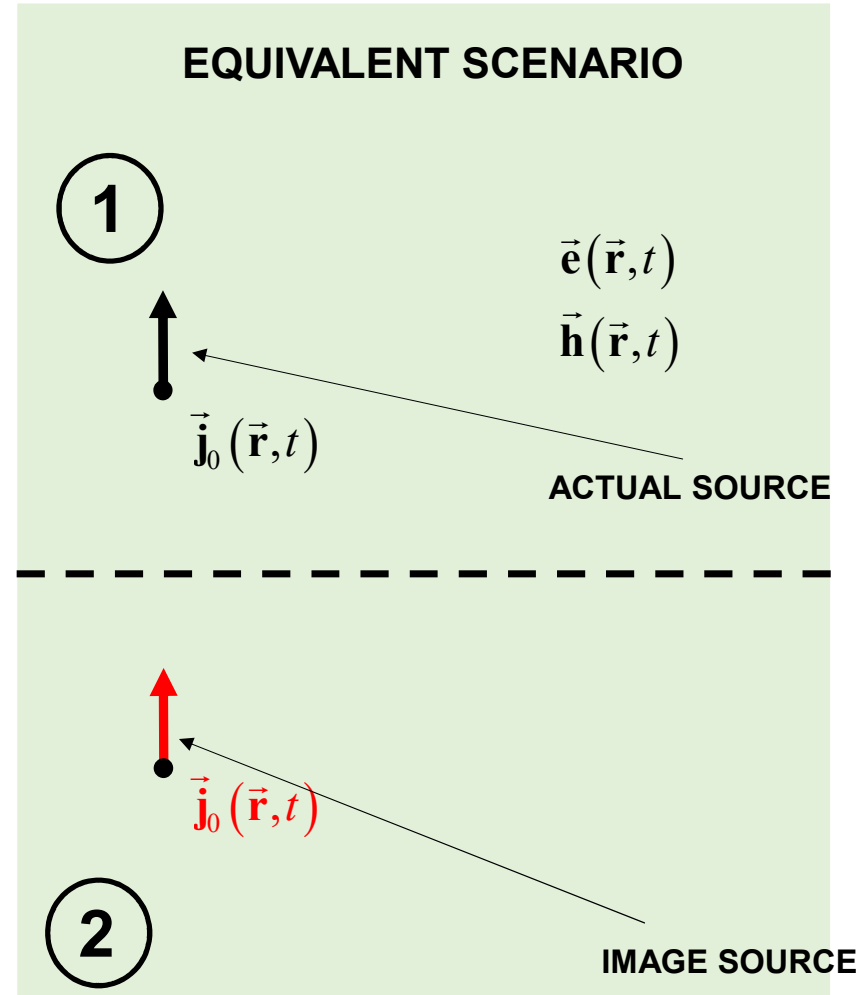
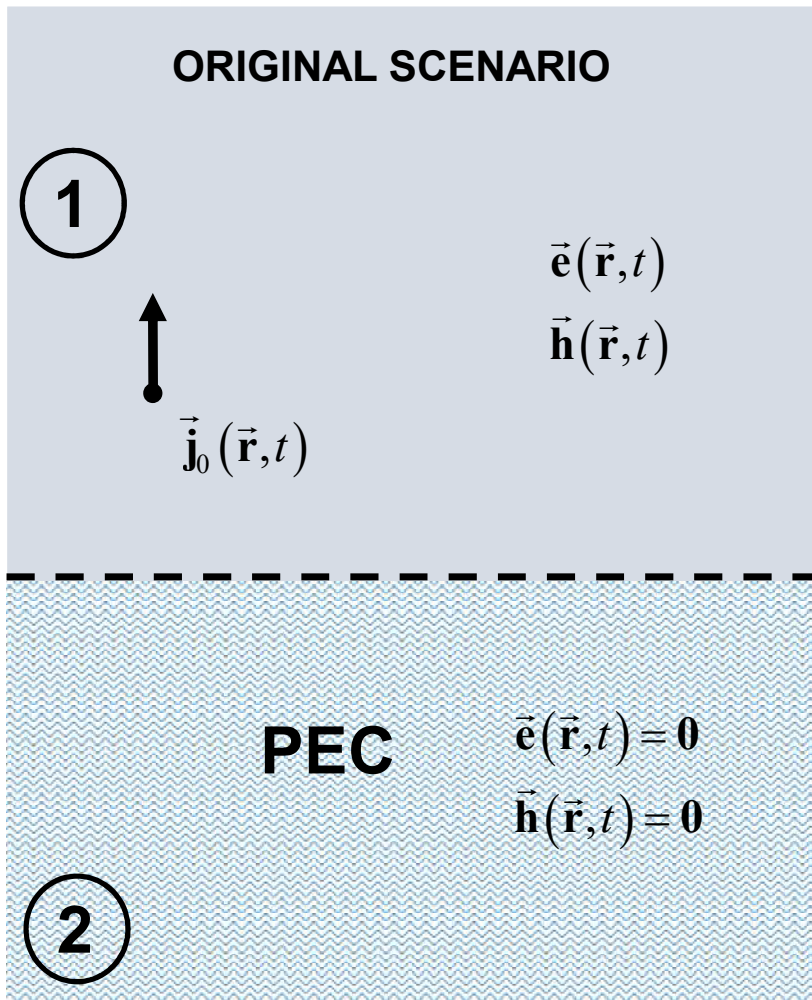


Image theory

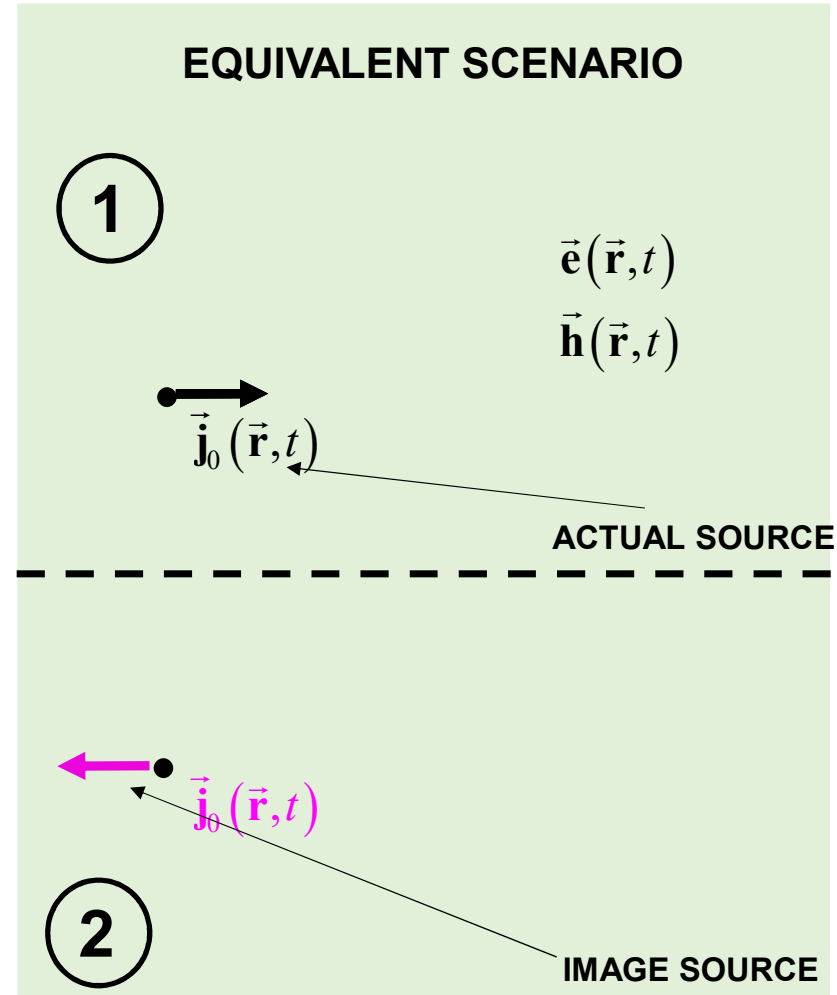
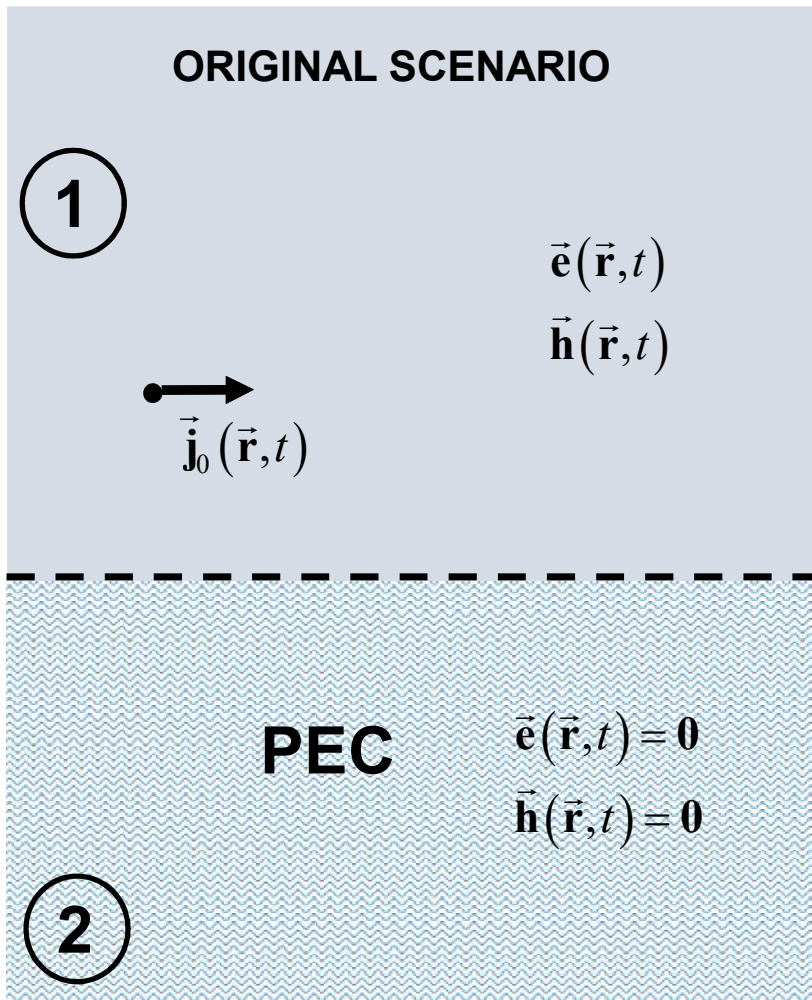


Image theory

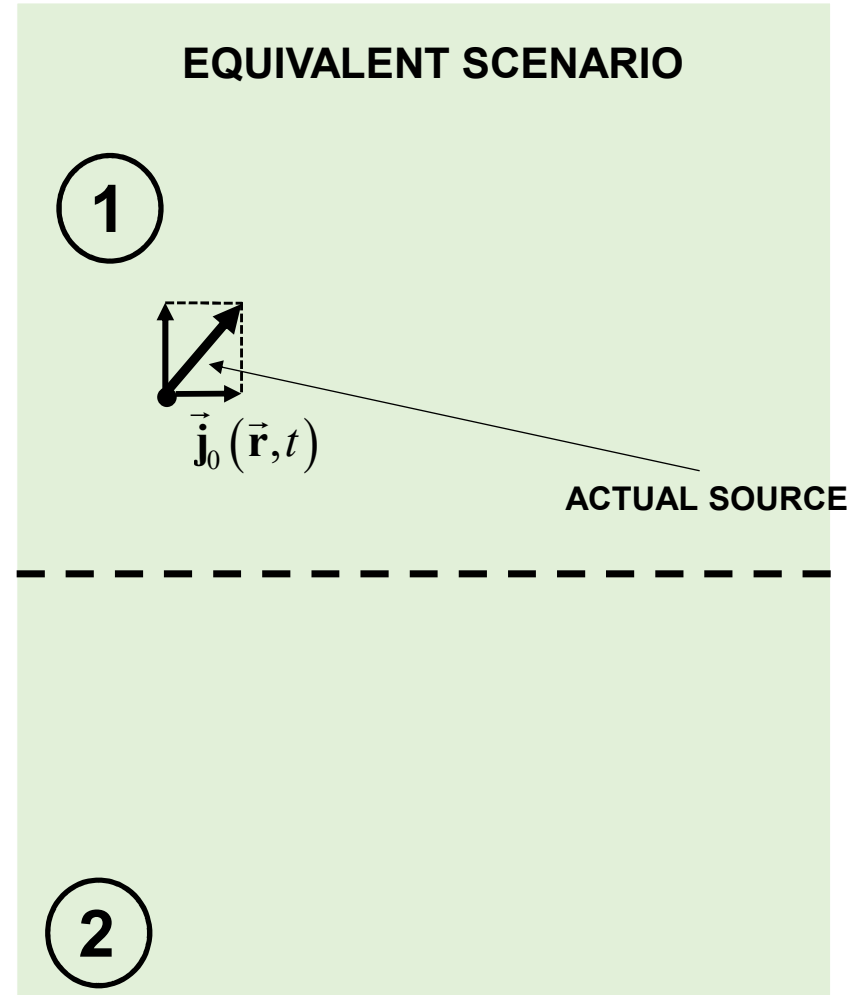
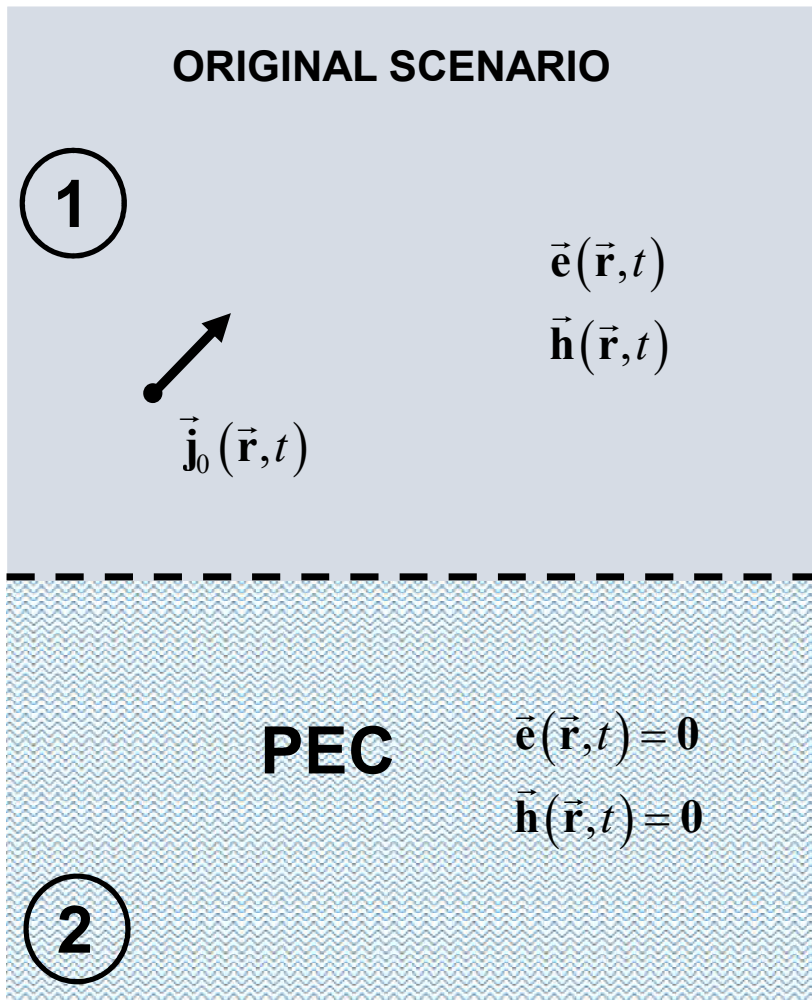


Image theory

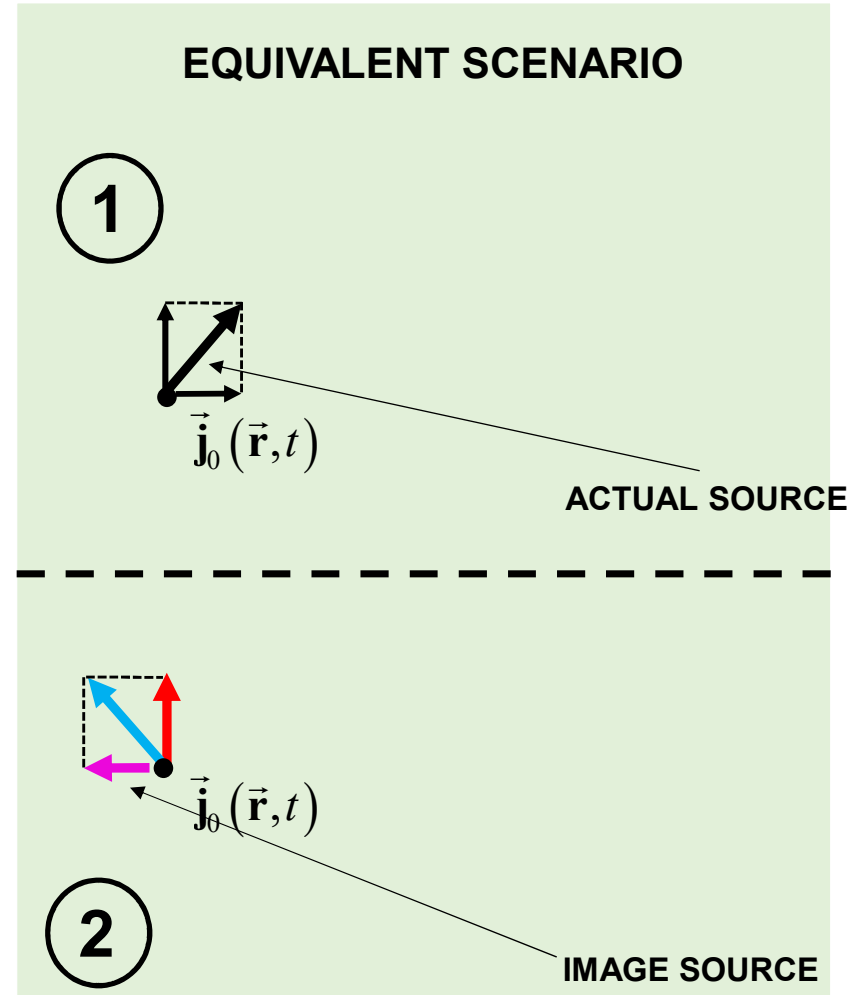
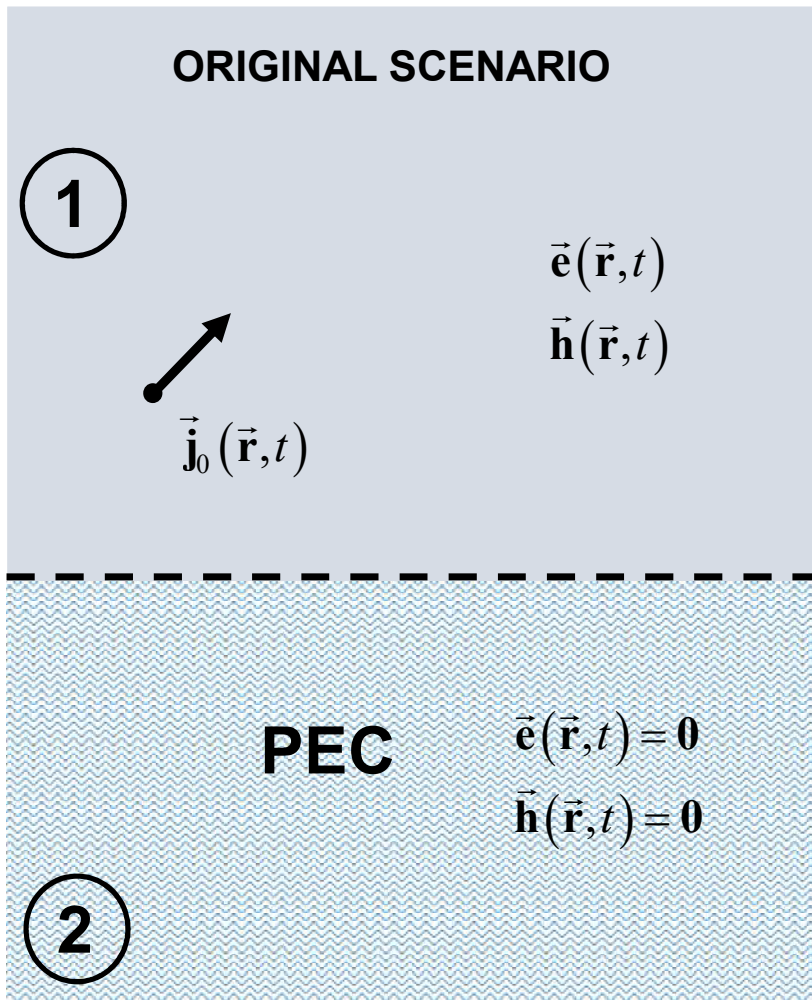


Image theory




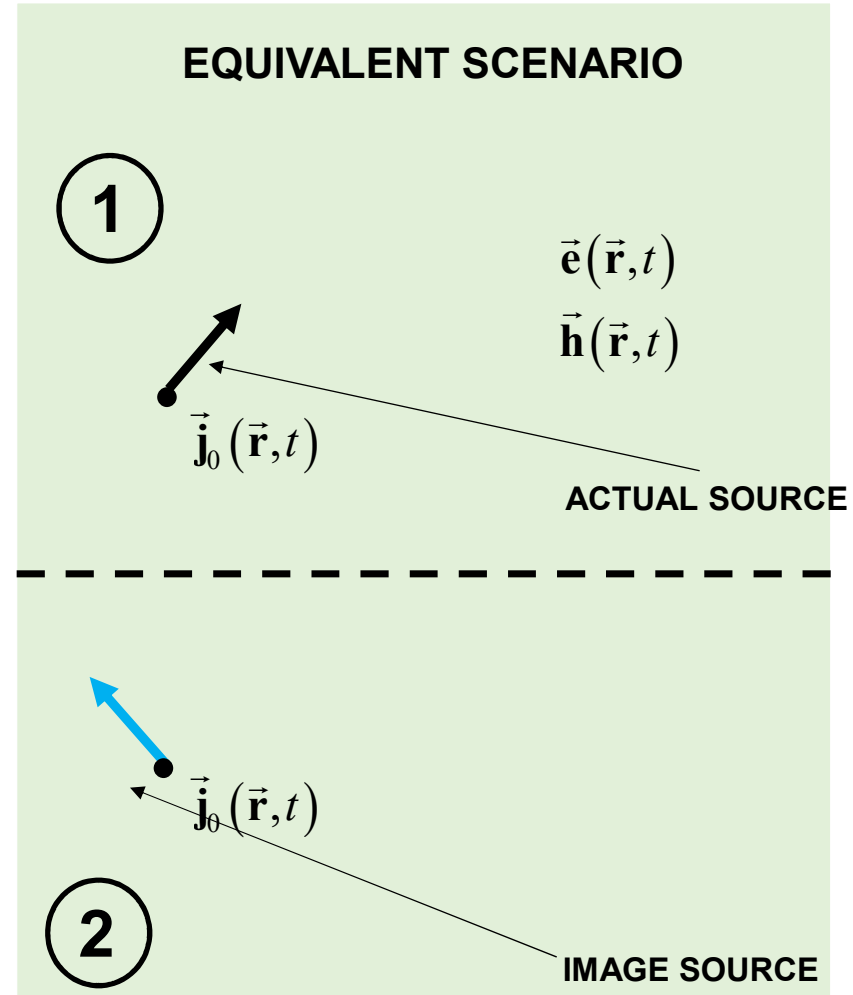


Image theory



Image theory (magnetic sources)

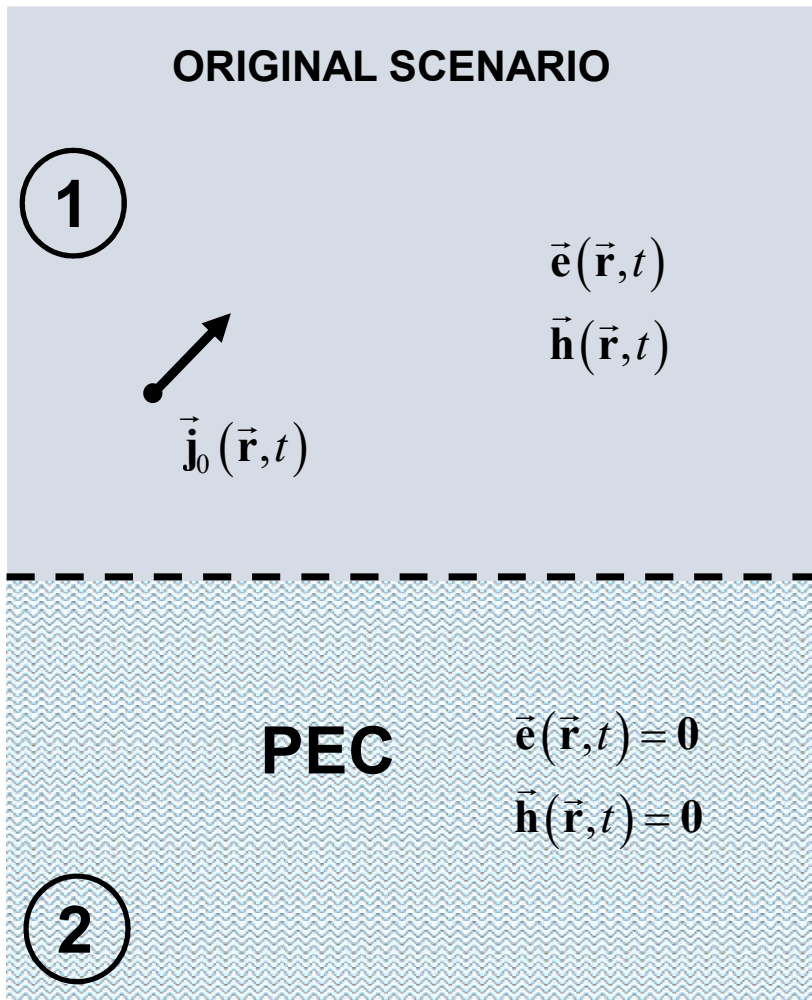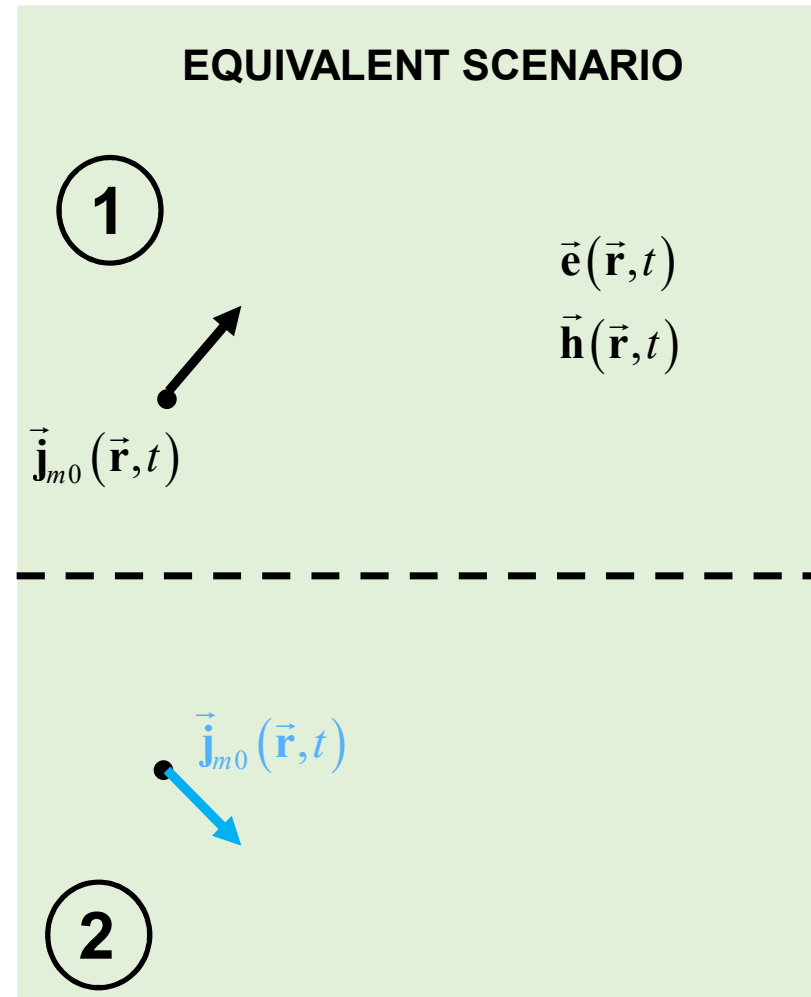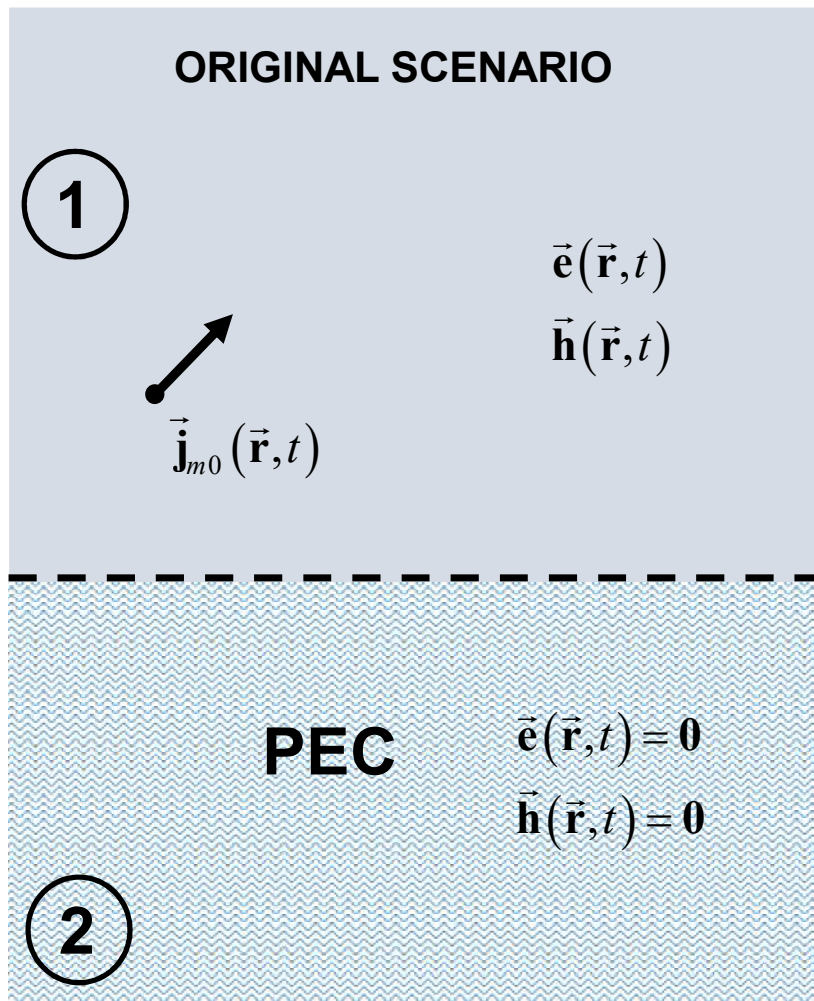

THEOREMS

Poynting

Time domain – Phasor domain

Uniqueness (Interior problem – Exterior problem)

Time domain – Phasor domain

Equivalence

Phasor domain

Image Theory

Reciprocity

Phasor domain