

A large satellite dish antenna is mounted on a mountain peak. The background shows a sunset or sunrise with a warm, orange and yellow glow. The dish is dark and metallic, with a complex support structure. The overall scene is atmospheric and technical.

Campi Elettromagnetici

Corso di Laurea in Ingegneria Informatica, Biomedica e delle
Telecomunicazioni

a.a. 2020–2021 – Laurea “Triennale” – Secondo semestre – Secondo anno


Università degli Studi di Napoli “Parthenope”

Stefano Perna

Maxwell equations: Time domain, Frequency domain, Phasors



Frequency domain

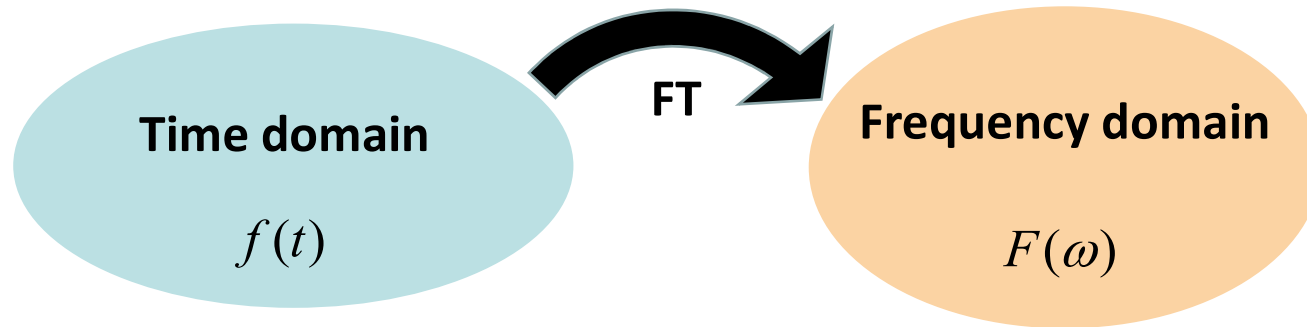


$$F(\omega) = \int_{-\infty}^{+\infty} f(t) e^{-j\omega t} dt$$

Fourier Transform (FT)

- 1) How to jump back from the Frequency domain to the Time domain**
- 2) Time domain derivative and Fourier Transform**

Frequency domain

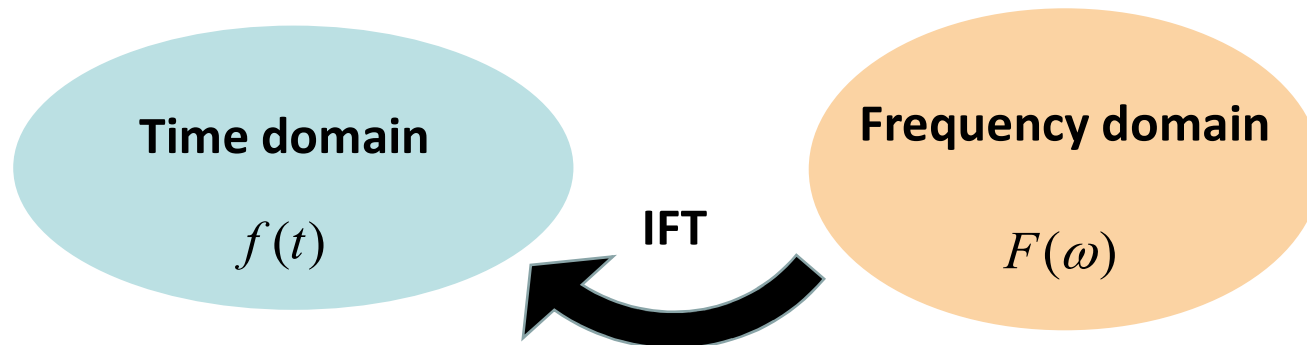

$$F(\omega) = \int_{-\infty}^{+\infty} f(t) e^{-j\omega t} dt$$


Fourier Transform (FT)

1) How to jump back from the Spectral domain to the Time domain

$$f(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F(\omega) e^{j\omega t} d\omega$$

Inverse Fourier Transform (IFT)


Frequency domain

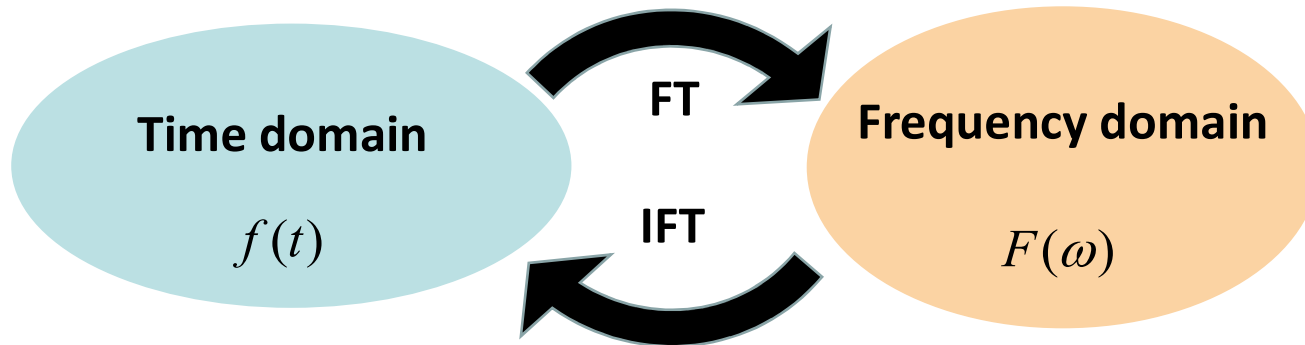

$$f(t) \longrightarrow \boxed{\text{FT}} \longrightarrow F(\omega) = \int_{-\infty}^{+\infty} f(t) e^{-j\omega t} dt$$

$$F(\omega) \longrightarrow \boxed{\text{IFT}} \longrightarrow f(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F(\omega) e^{j\omega t} d\omega$$


Frequency domain

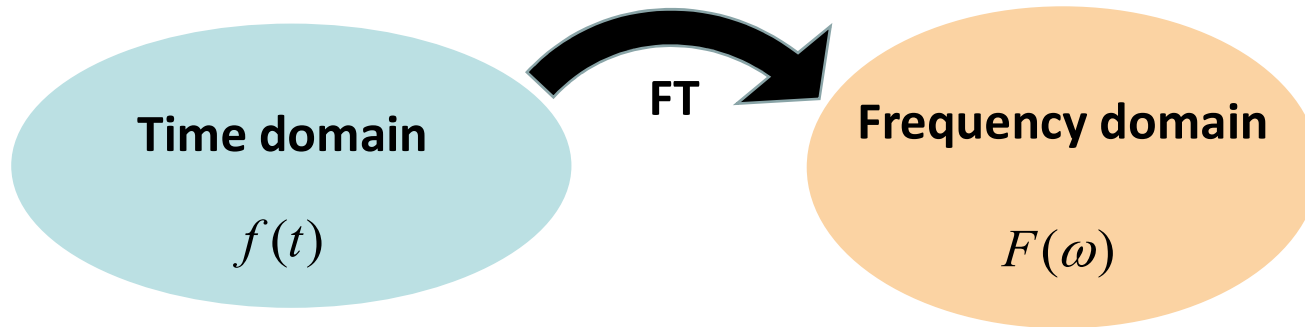

$$F(\omega) = \int_{-\infty}^{+\infty} f(t) e^{-j\omega t} dt$$

Fourier Transform (FT)

2) Time-domain derivative and Fourier Transform

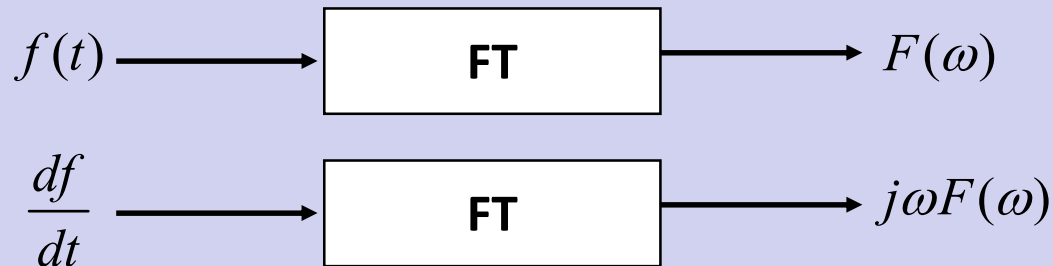


Frequency domain

- **Fourier Transform and functions of n variables**
- **Fourier Transform and vector functions**
- **Fourier Transform and vector functions of n variables**

- 1) How to jump back from the Frequency domain to the Time domain**
- 2) Time domain derivative and Fourier Transform**


Fourier Transform and functions of n variables

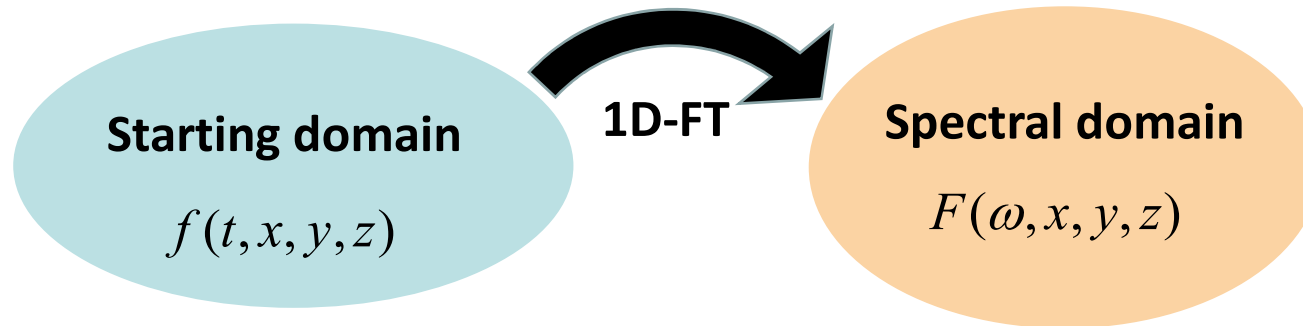

One Dimensional Fourier Transform (1D-FT)

$$F(\omega, x, y, z) = \int_{-\infty}^{+\infty} f(t, x, y, z) e^{-j\omega t} dt$$

Fourier Transform and functions of n variables

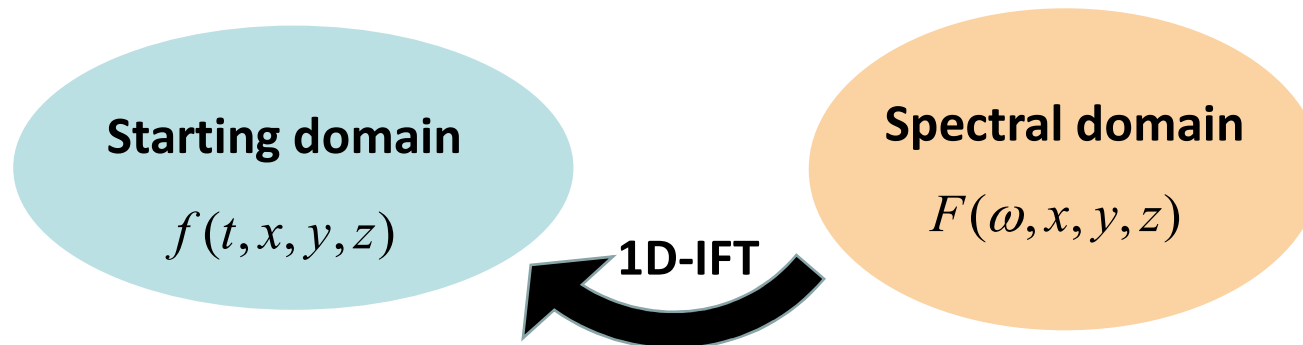


One Dimensional Fourier Transform (1D-FT)

$$F(\omega, x, y, z) = \int_{-\infty}^{+\infty} f(t, x, y, z) e^{-j\omega t} dt$$

1) How to jump back from the Spectral domain to the Time domain

$$f(t, x, y, z) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F(\omega, x, y, z) e^{j\omega t} d\omega \quad \text{1D-IFT}$$


Fourier Transform and functions of n variables

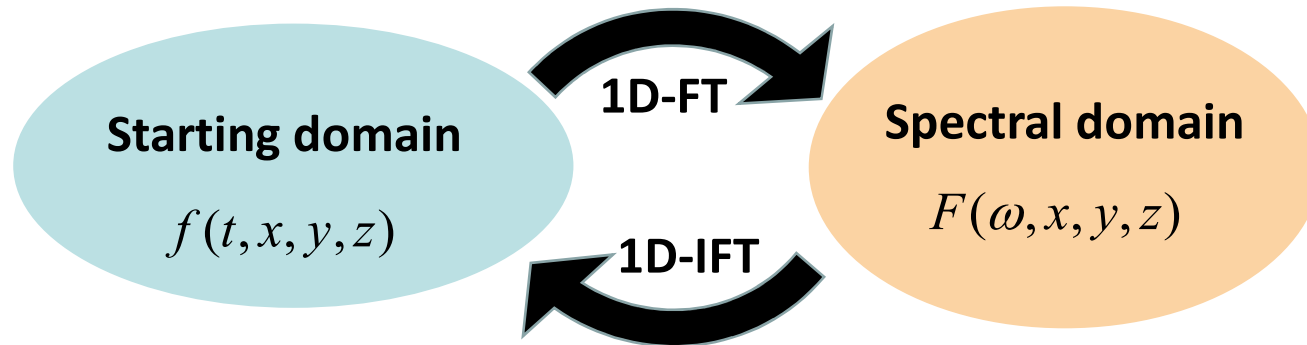


$$f(t, x, y, z) \xrightarrow{\text{1D-FT}} F(\omega, x, y, z) = \int_{-\infty}^{+\infty} f(t, x, y, z) e^{-j\omega t} dt$$

$$F(\omega, x, y, z) \xrightarrow{\text{1D-IFT}} f(t, x, y, z) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F(\omega, x, y, z) e^{j\omega t} d\omega$$

Fourier Transform and functions of n variables

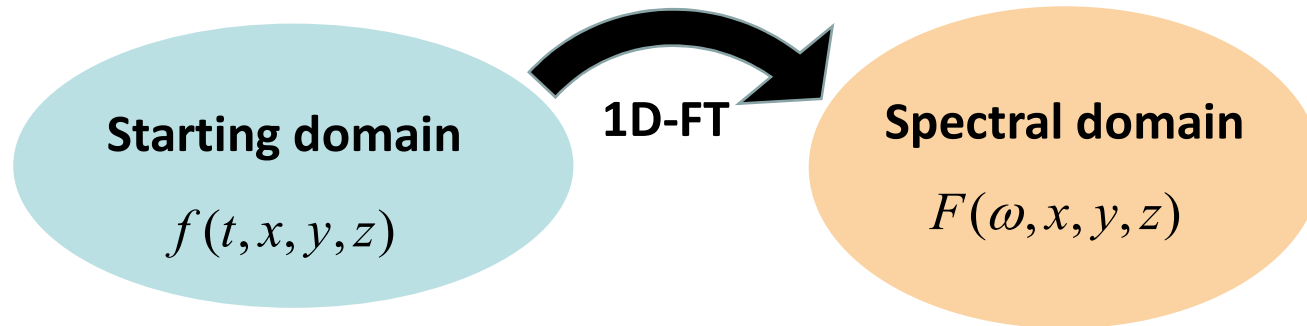

2) Time domain derivative and Fourier Transform


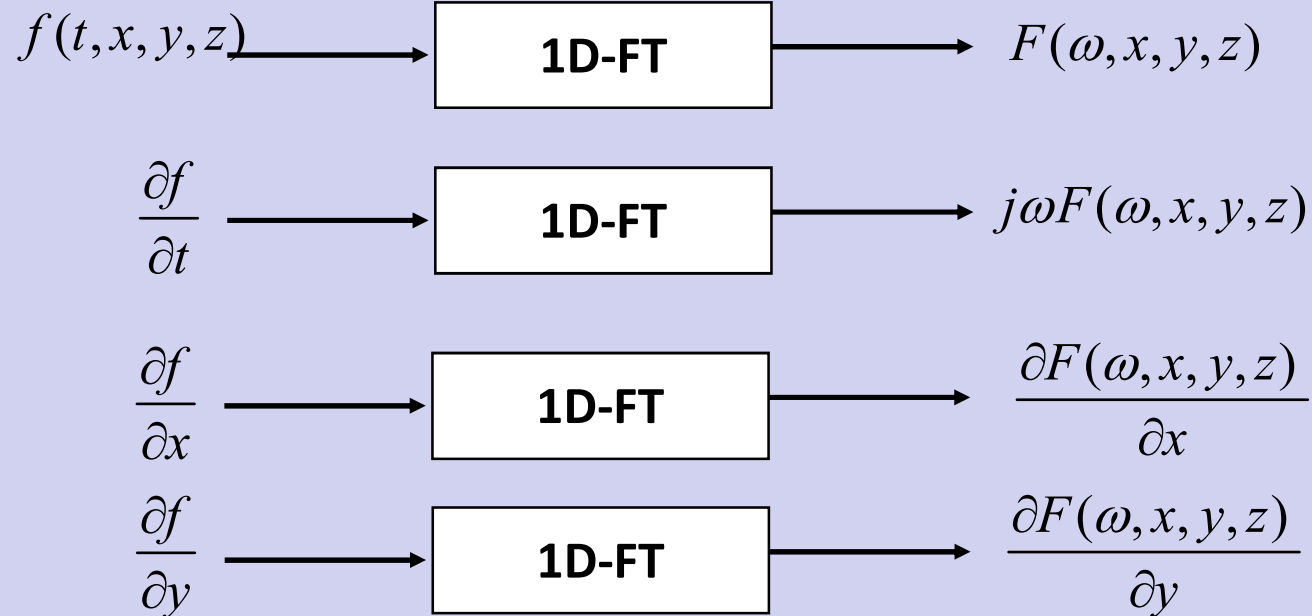


Frequency domain



- Fourier Transform and functions of n variables
- **Fourier Transform and vector functions**
- Fourier Transform and vector functions of n variables

- 1) How to jump back from the Frequency domain to the Time domain**
- 2) Time domain derivative and Fourier Transform**

Fourier Transform and vector functions

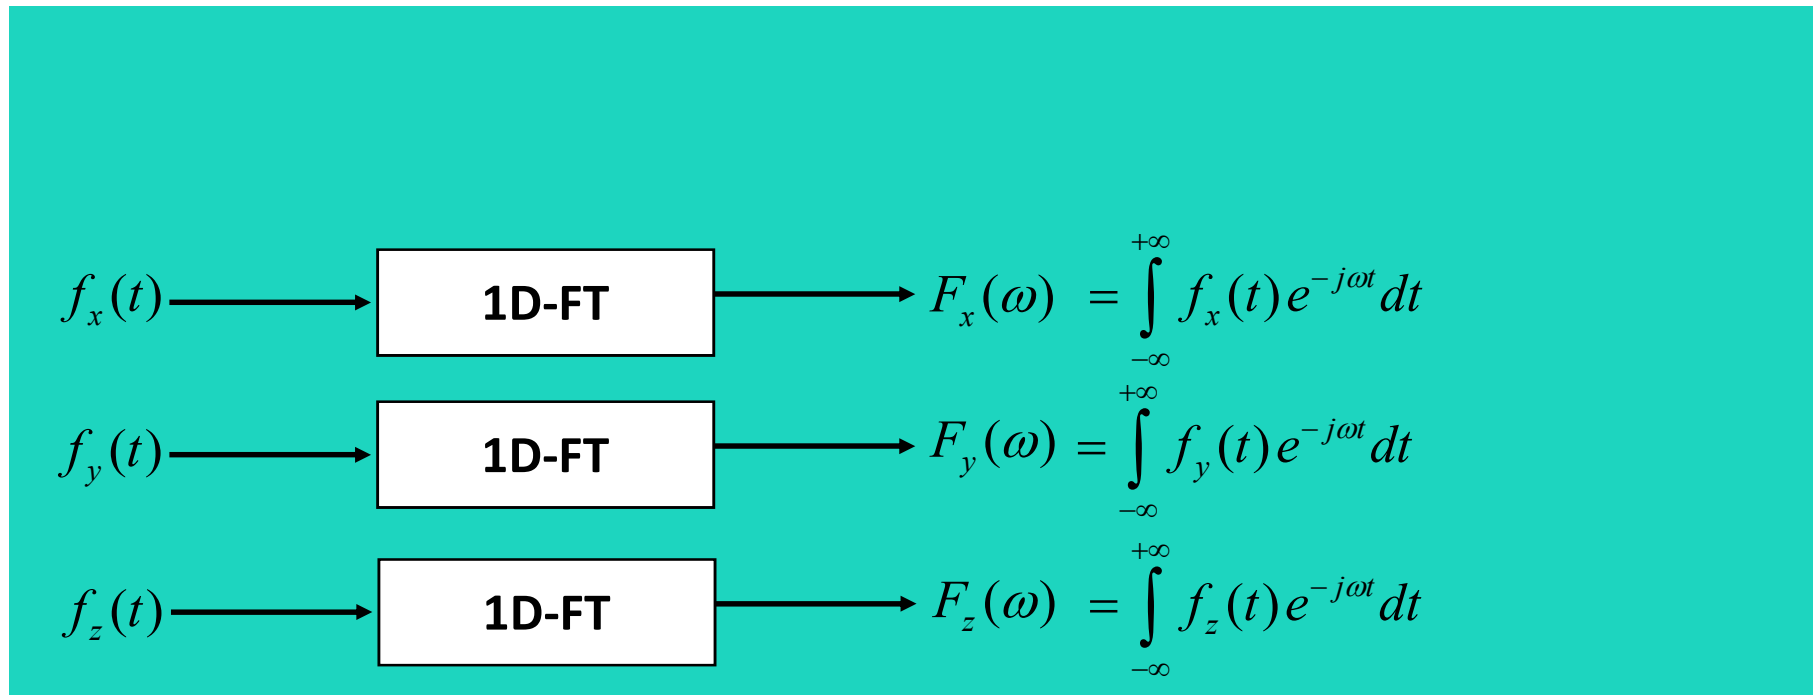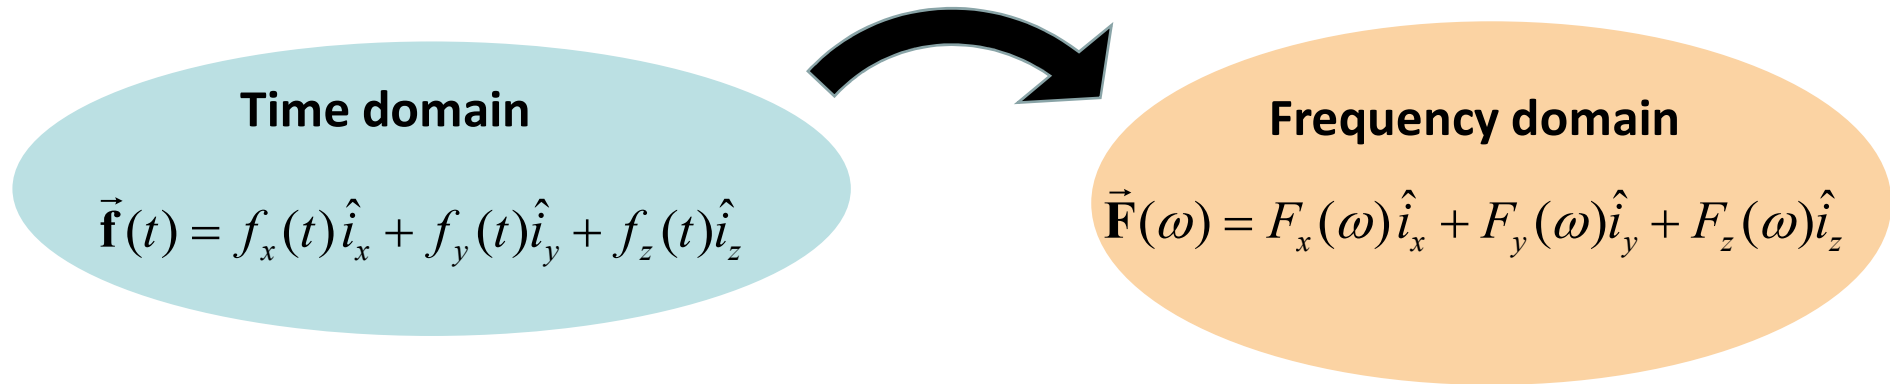

Fourier Transform and vector functions

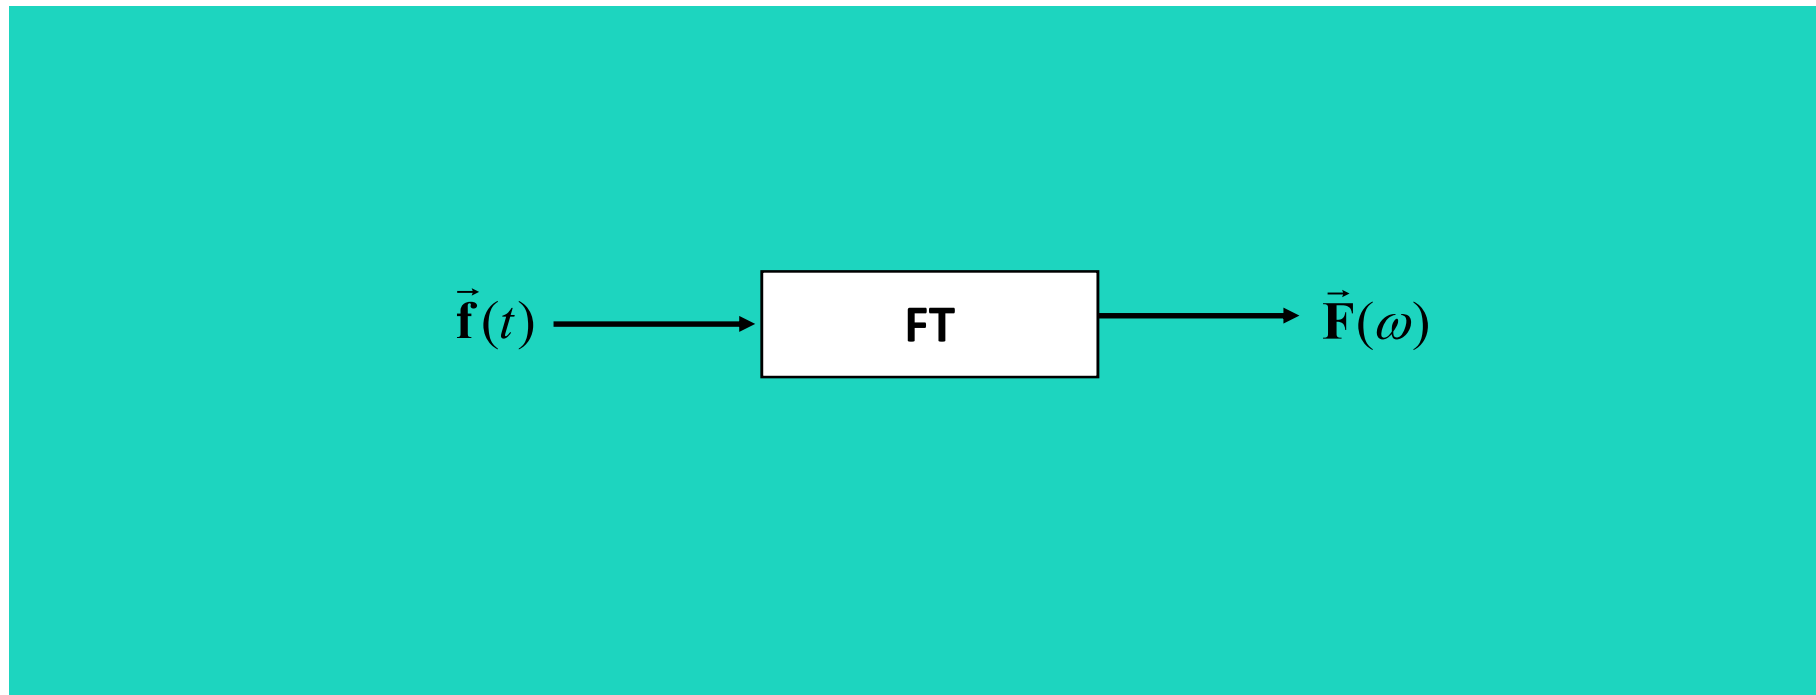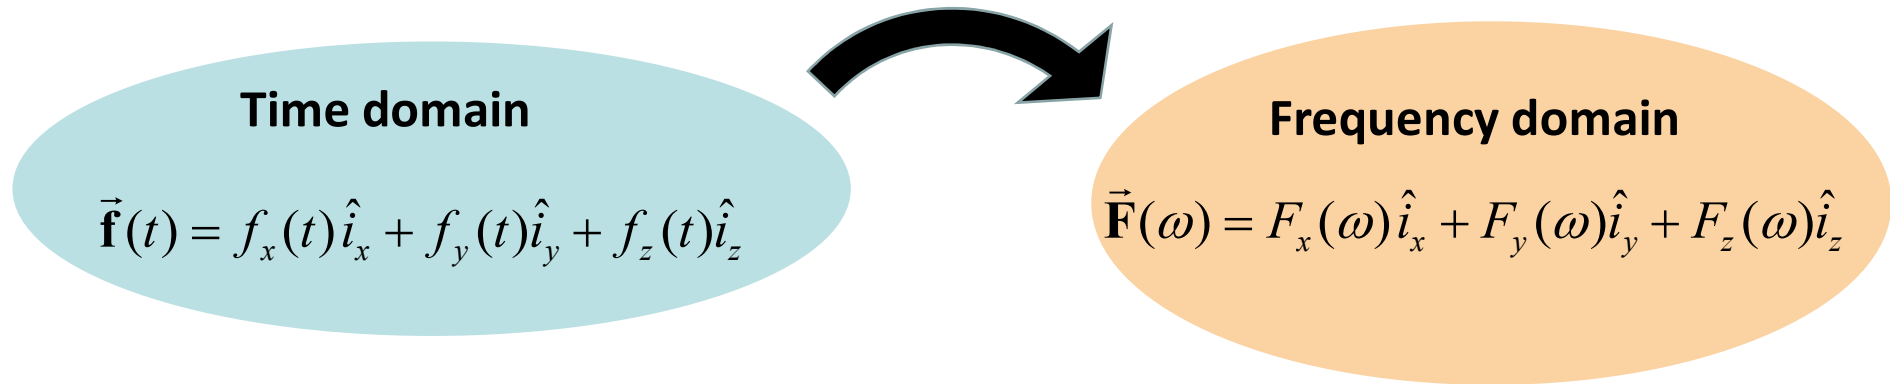

Fourier Transform and vector functions

Time domain

$$\vec{\mathbf{f}}(t) = f_x(t)\hat{i}_x + f_y(t)\hat{i}_y + f_z(t)\hat{i}_z$$

Frequency domain


$$\vec{\mathbf{F}}(\omega) = F_x(\omega)\hat{i}_x + F_y(\omega)\hat{i}_y + F_z(\omega)\hat{i}_z$$




1) How to jump back from the Spectral domain to the Time domain

$$\begin{array}{l} F_x(\omega) \longrightarrow \boxed{\text{1D-IFT}} \longrightarrow f_x(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F_x(\omega) e^{j\omega t} d\omega \\ F_y(\omega) \longrightarrow \boxed{\text{1D-IFT}} \longrightarrow f_y(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F_y(\omega) e^{j\omega t} d\omega \\ F_z(\omega) \longrightarrow \boxed{\text{1D-IFT}} \longrightarrow f_z(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F_z(\omega) e^{j\omega t} d\omega \end{array}$$

Fourier Transform and vector functions

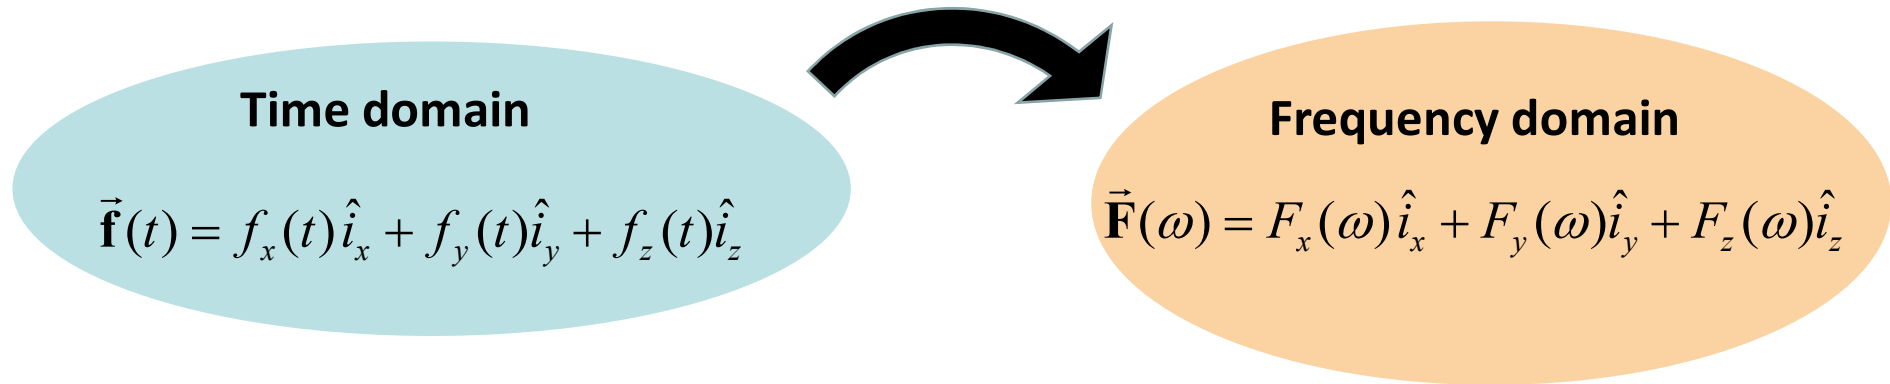

2) Time domain derivative and Fourier Transform

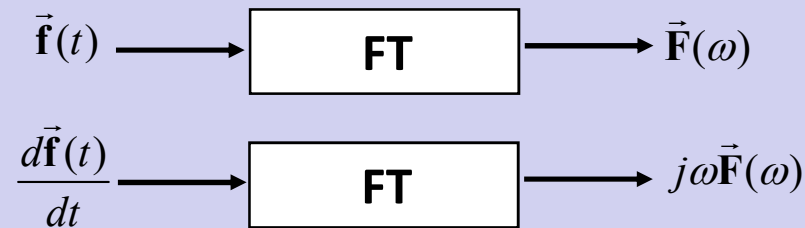

Frequency domain

- Fourier Transform and functions of n variables
- Fourier Transform and vector functions
- **Fourier Transform and vector functions of n variables**

- 1) How to jump back from the Frequency domain to the Time domain**
- 2) Time domain derivative and Fourier Transform**

Fourier Transform and vector functions of n variables

Time domain



$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z) \hat{i}_x + f_y(t, x, y, z) \hat{i}_y + f_z(t, x, y, z) \hat{i}_z$$





Frequency domain

?

Fourier Transform and vector functions of n variables

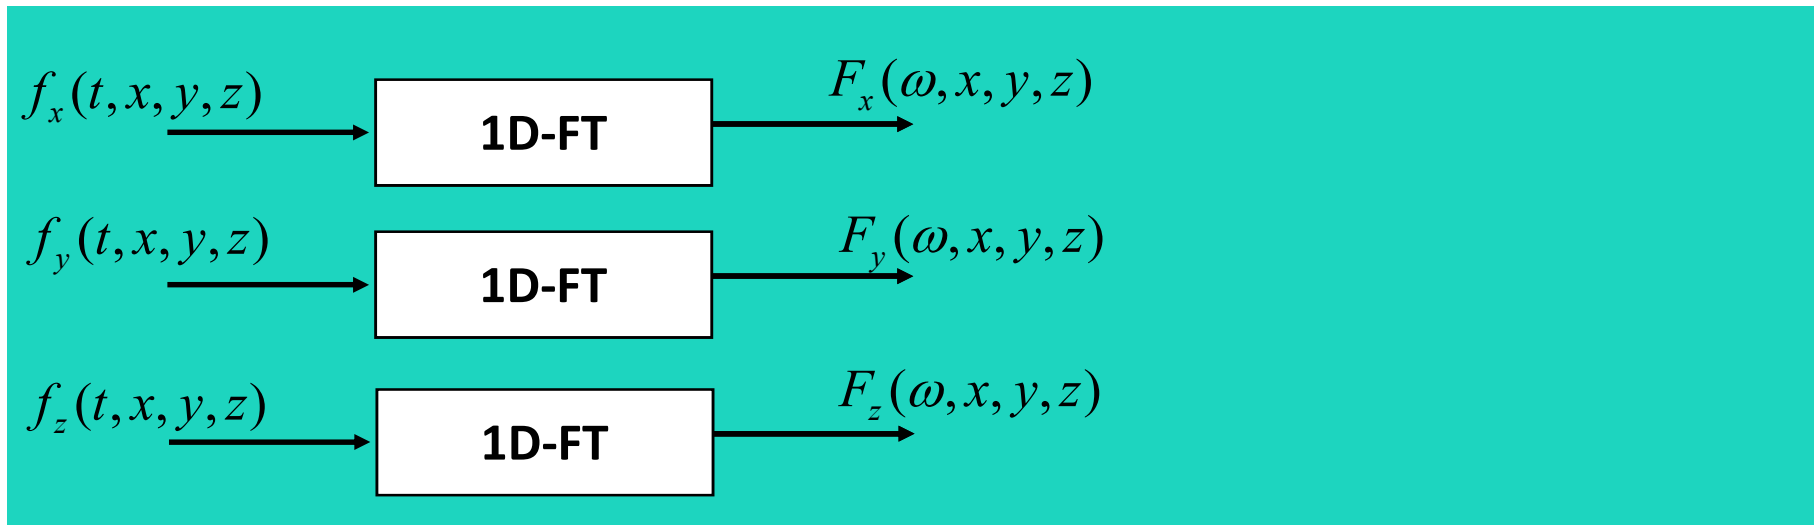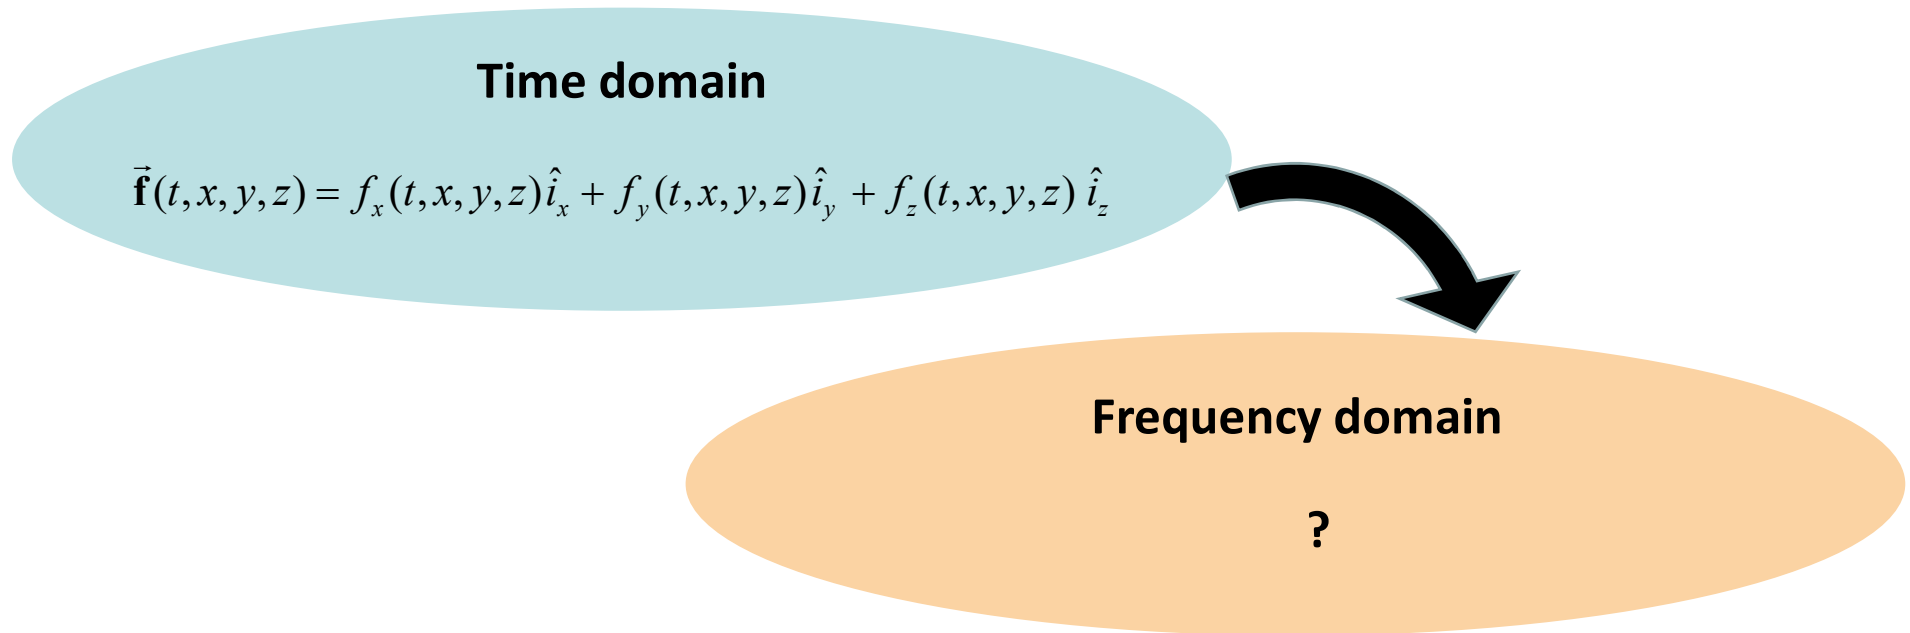

Fourier Transform and vector functions of n variables

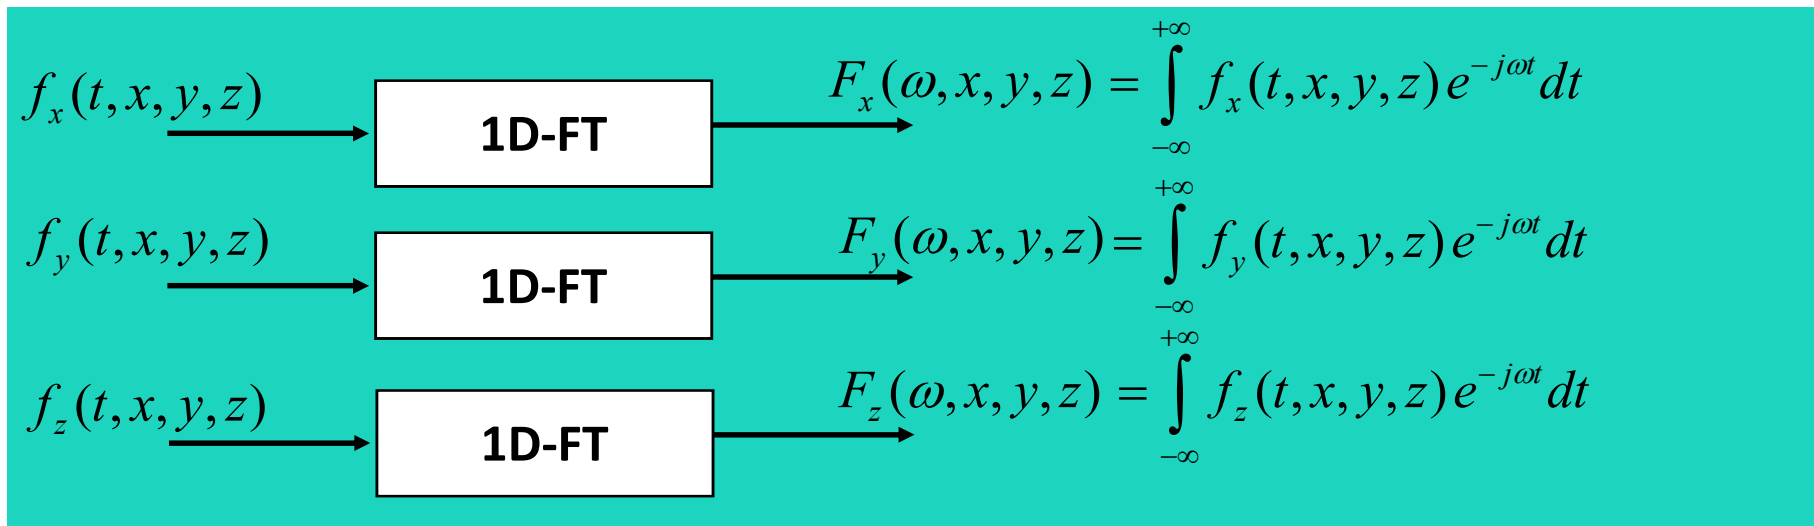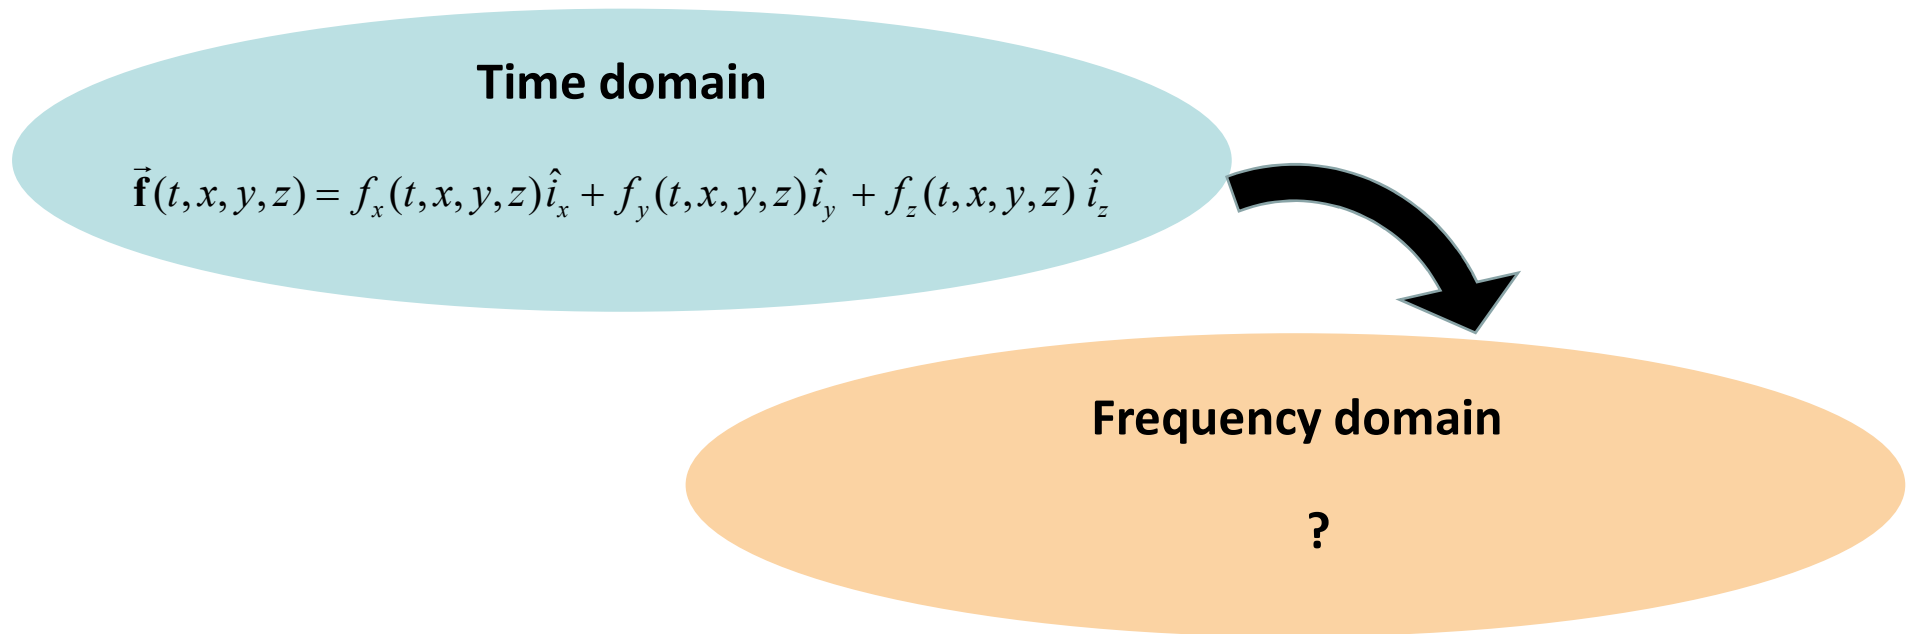

Fourier Transform and vector functions of n variables


Time domain

$$\vec{f}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$



Frequency domain

$$\vec{F}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

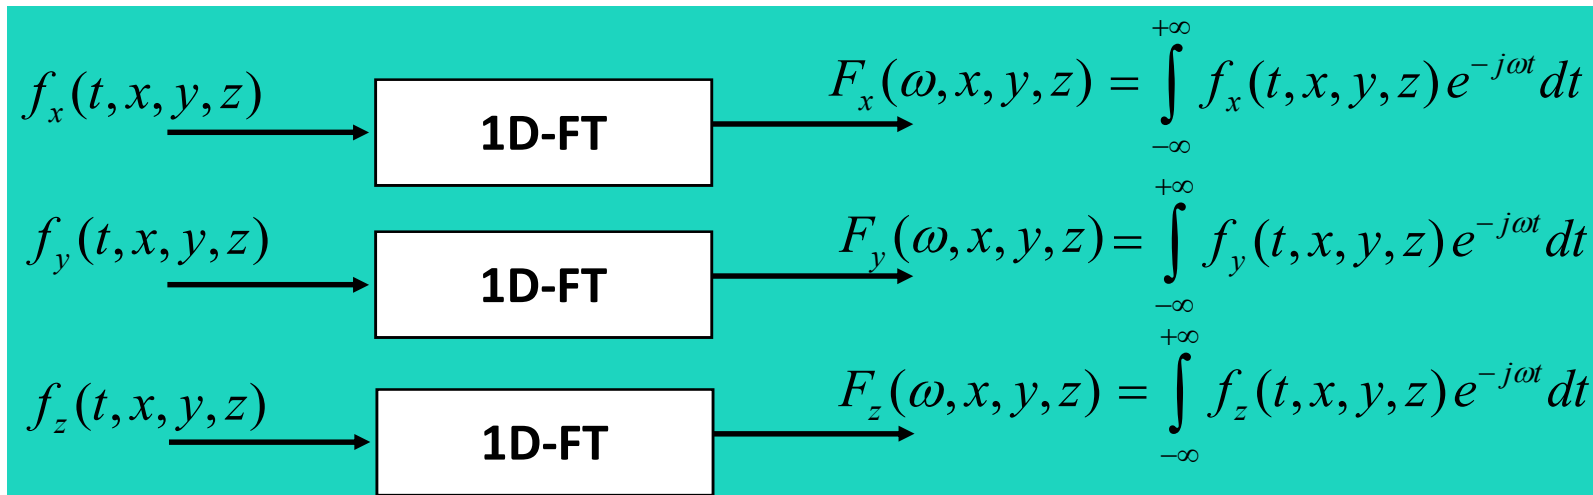

Fourier Transform and vector functions of n variables

Time domain

$$\vec{f}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$

$t \rightarrow \omega$

Frequency domain


$$\vec{F}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$



A flowchart on a teal background showing the Fourier Transform process. On the left, the vector function $\vec{f}(t, x, y, z)$ is written. An arrow points from this expression to a white rectangular box with a black border containing the letters "FT". Another arrow points from the "FT" box to the transformed vector function $\vec{F}(\omega, x, y, z)$ on the right.


$$\vec{f}(t, x, y, z) \longrightarrow \text{FT} \longrightarrow \vec{F}(\omega, x, y, z)$$

Fourier Transform and vector functions of n variables

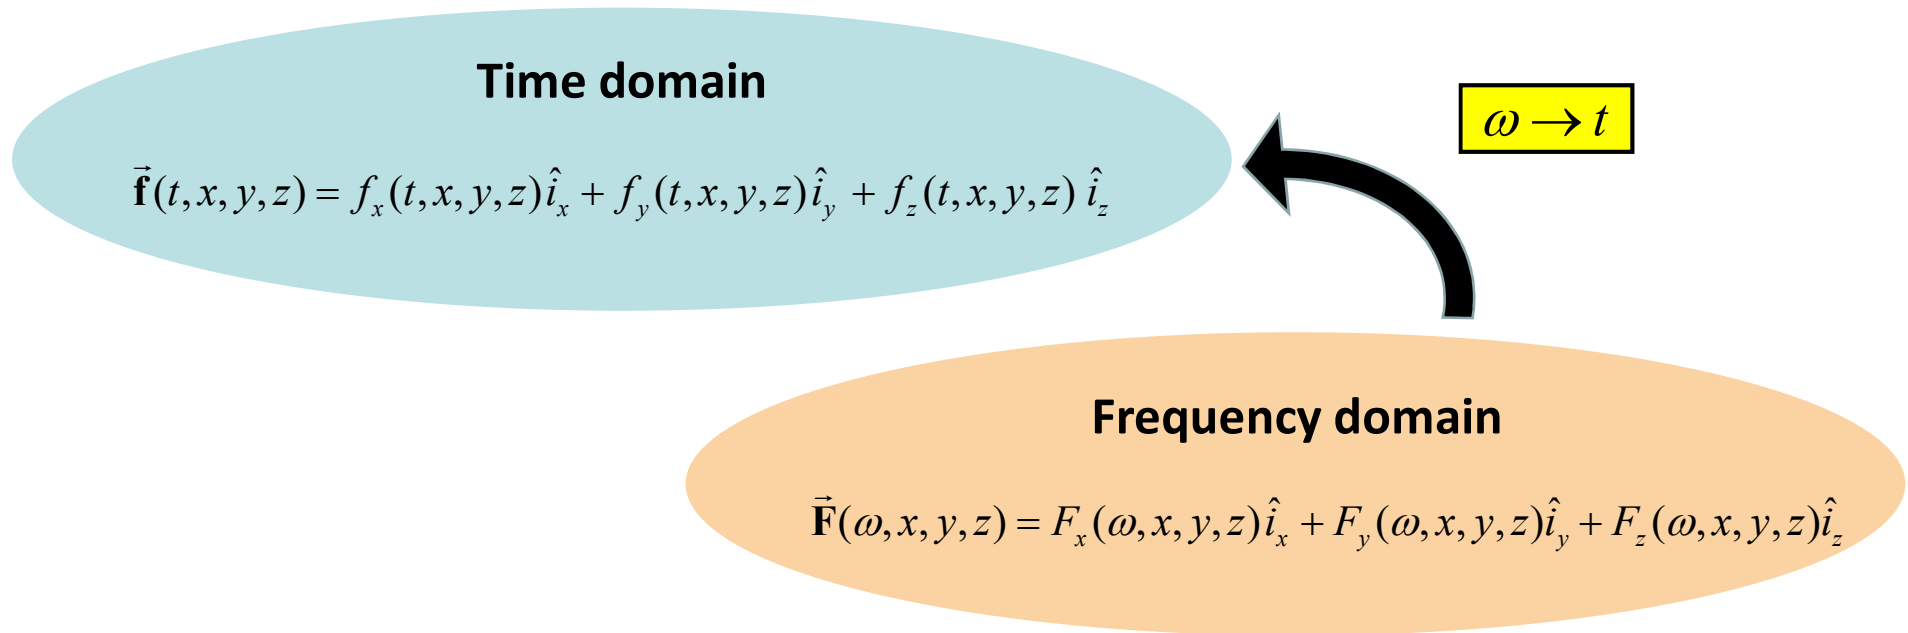


1) How to jump back from the Spectral domain to the Time domain


Fourier Transform and vector functions of n variables

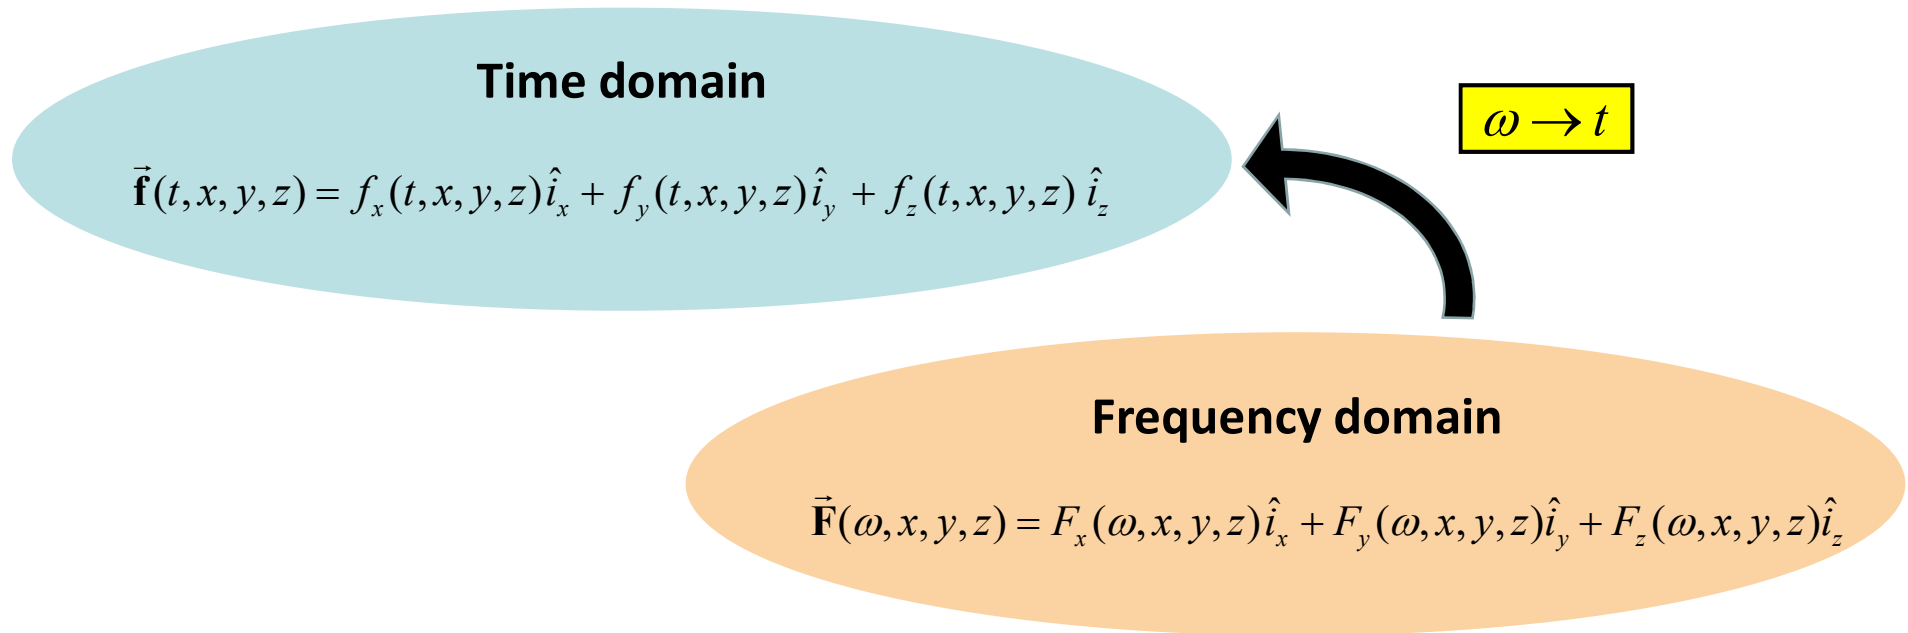

1) How to jump back from the Spectral domain to the Time domain

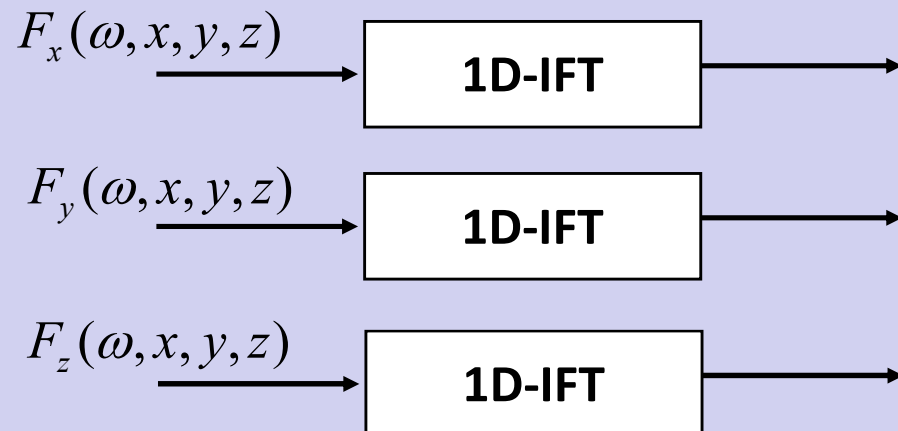

Fourier Transform and vector functions of n variables

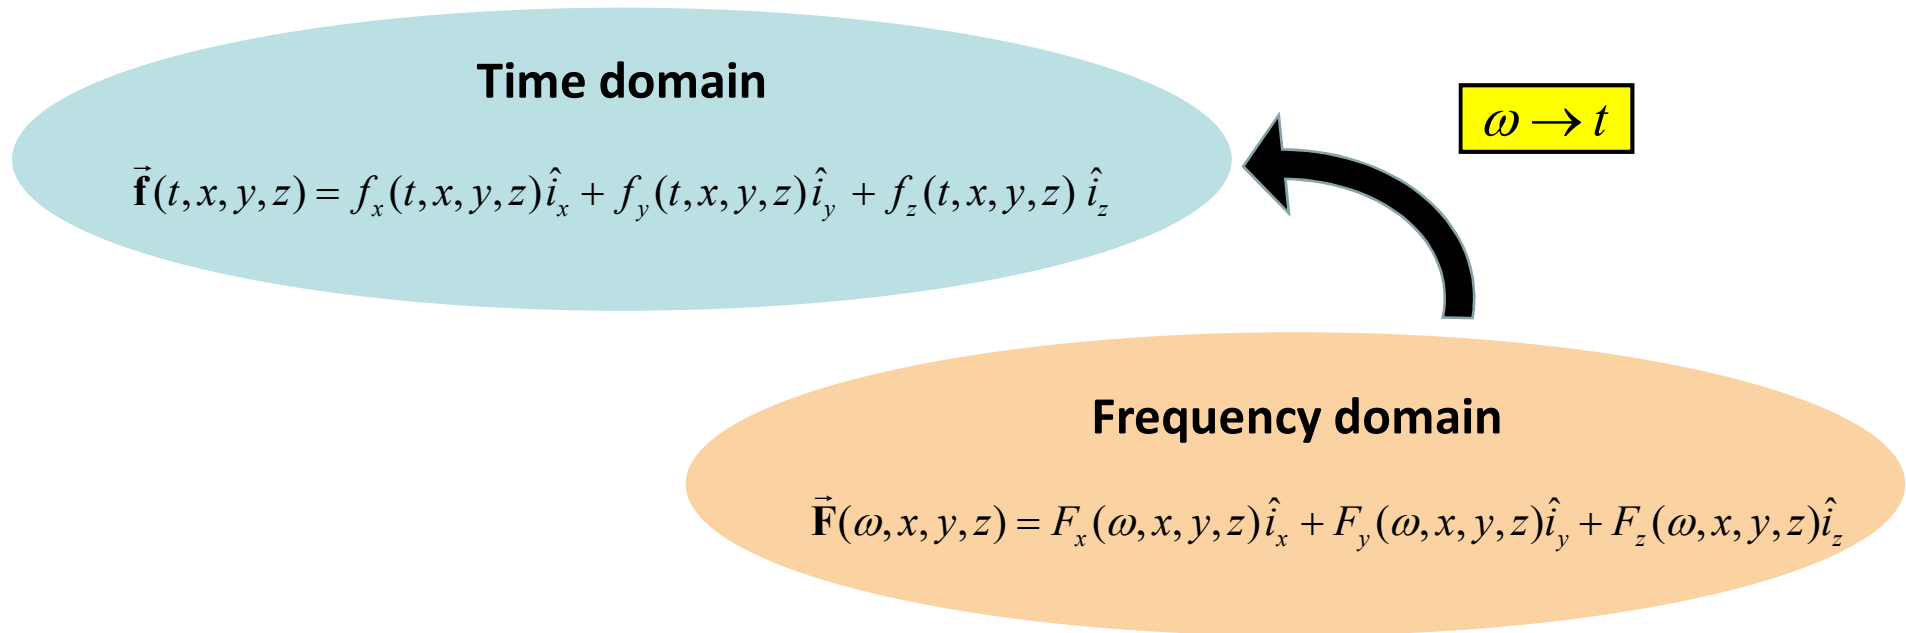

1) How to jump back from the Spectral domain to the Time domain

$$F_x(\omega, x, y, z) \xrightarrow{\text{1D-IFT}} f_x(t, x, y, z) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F_x(\omega, x, y, z) e^{j\omega t} d\omega$$

$$F_y(\omega, x, y, z) \xrightarrow{\text{1D-IFT}} f_y(t, x, y, z) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F_y(\omega, x, y, z) e^{j\omega t} d\omega$$

$$F_z(\omega, x, y, z) \xrightarrow{\text{1D-IFT}} f_z(t, x, y, z) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F_z(\omega, x, y, z) e^{j\omega t} d\omega$$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{f}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$

$t \rightarrow \omega$

Frequency domain

$$\vec{F}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$


$t \rightarrow \omega$

Frequency domain

$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

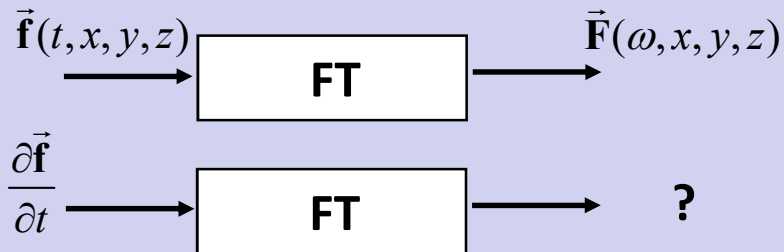

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$


$t \rightarrow \omega$

Frequency domain

$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

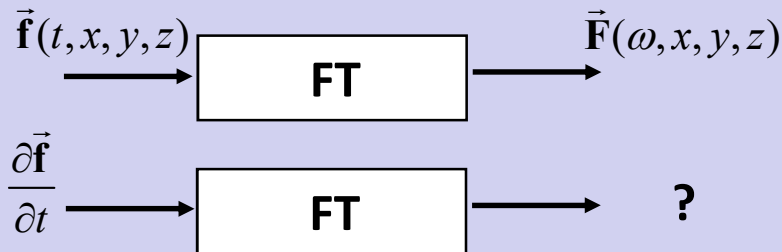

$$\frac{\partial \vec{\mathbf{f}}(t, \vec{\mathbf{r}})}{\partial t} = \frac{\partial f_x}{\partial t}\hat{i}_x + \frac{\partial f_y}{\partial t}\hat{i}_y + \frac{\partial f_z}{\partial t}\hat{i}_z$$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$


$t \rightarrow \omega$

Frequency domain


$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

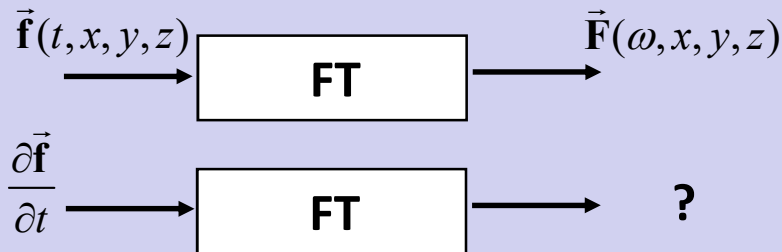

$$\frac{\partial \vec{\mathbf{f}}(t, \vec{\mathbf{r}})}{\partial t} = \frac{\partial f_x}{\partial t}\hat{i}_x + \frac{\partial f_y}{\partial t}\hat{i}_y + \frac{\partial f_z}{\partial t}\hat{i}_z$$

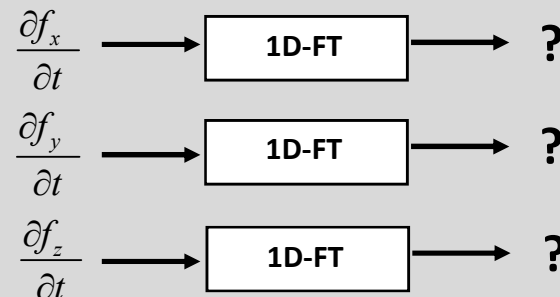

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$


$t \rightarrow \omega$

Frequency domain

$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

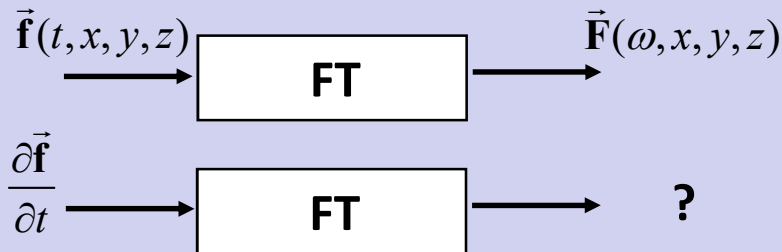

$$\frac{\partial \vec{\mathbf{f}}(t, \vec{\mathbf{r}})}{\partial t} = \frac{\partial f_x}{\partial t}\hat{i}_x + \frac{\partial f_y}{\partial t}\hat{i}_y + \frac{\partial f_z}{\partial t}\hat{i}_z$$

$$\frac{\partial f_x}{\partial t} \xrightarrow{\text{1D-FT}} j\omega F_x(\omega, x, y, z)$$

$$\frac{\partial f_y}{\partial t} \xrightarrow{\text{1D-FT}} j\omega F_y(\omega, x, y, z)$$

$$\frac{\partial f_z}{\partial t} \xrightarrow{\text{1D-FT}} j\omega F_z(\omega, x, y, z)$$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$

$t \rightarrow \omega$

Frequency domain

$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

$$\vec{\mathbf{f}}(t, x, y, z) \xrightarrow{\text{FT}} \vec{\mathbf{F}}(\omega, x, y, z)$$

$$\frac{\partial \vec{\mathbf{f}}}{\partial t} \xrightarrow{\text{FT}} j\omega F_x(\omega, x, y, z)\hat{i}_x + j\omega F_y(\omega, x, y, z)\hat{i}_y + j\omega F_z(\omega, x, y, z)\hat{i}_z$$

$$\frac{\partial \vec{\mathbf{f}}(t, \vec{\mathbf{r}})}{\partial t} = \frac{\partial f_x}{\partial t}\hat{i}_x + \frac{\partial f_y}{\partial t}\hat{i}_y + \frac{\partial f_z}{\partial t}\hat{i}_z$$

$$\frac{\partial f_x}{\partial t} \xrightarrow{\text{1D-FT}} j\omega F_x(\omega, x, y, z)$$

$$\frac{\partial f_y}{\partial t} \xrightarrow{\text{1D-FT}} j\omega F_y(\omega, x, y, z)$$

$$\frac{\partial f_z}{\partial t} \xrightarrow{\text{1D-FT}} j\omega F_z(\omega, x, y, z)$$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$

$t \rightarrow \omega$

Frequency domain

$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

$$\vec{\mathbf{f}}(t, x, y, z) \xrightarrow{\text{FT}} \vec{\mathbf{F}}(\omega, x, y, z)$$

$$\frac{\partial \vec{\mathbf{f}}}{\partial t} \xrightarrow{\text{FT}} j\omega \vec{\mathbf{F}}(\omega, x, y, z) = j\omega F_x(\omega, x, y, z)\hat{i}_x + j\omega F_y(\omega, x, y, z)\hat{i}_y + j\omega F_z(\omega, x, y, z)\hat{i}_z$$

$$\frac{\partial \vec{\mathbf{f}}(t, \vec{\mathbf{r}})}{\partial t} = \frac{\partial f_x}{\partial t}\hat{i}_x + \frac{\partial f_y}{\partial t}\hat{i}_y + \frac{\partial f_z}{\partial t}\hat{i}_z$$

$$\frac{\partial f_x}{\partial t} \xrightarrow{\text{1D-FT}} j\omega F_x(\omega, x, y, z)$$

$$\frac{\partial f_y}{\partial t} \xrightarrow{\text{1D-FT}} j\omega F_y(\omega, x, y, z)$$

$$\frac{\partial f_z}{\partial t} \xrightarrow{\text{1D-FT}} j\omega F_z(\omega, x, y, z)$$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$


$t \rightarrow \omega$

Frequency domain

$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

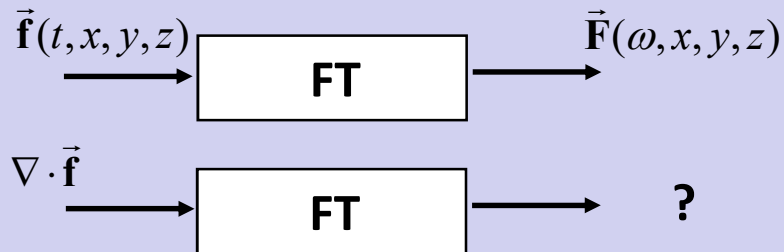

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$


$t \rightarrow \omega$

Frequency domain

$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

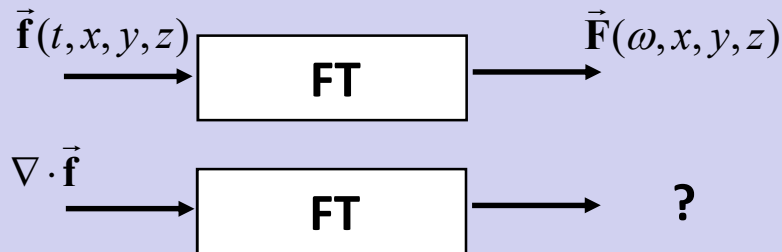

$$\nabla \cdot \vec{\mathbf{f}}(t, \vec{\mathbf{r}}) = \frac{\partial f_x}{\partial x} + \frac{\partial f_y}{\partial y} + \frac{\partial f_z}{\partial z}$$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$


$t \rightarrow \omega$

Frequency domain


$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

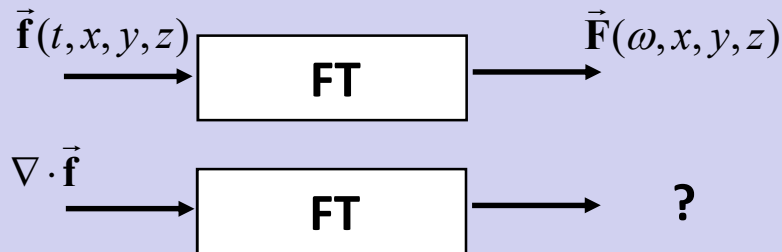

$$\nabla \cdot \vec{\mathbf{f}}(t, \vec{\mathbf{r}}) = \frac{\partial f_x}{\partial x} + \frac{\partial f_y}{\partial y} + \frac{\partial f_z}{\partial z}$$

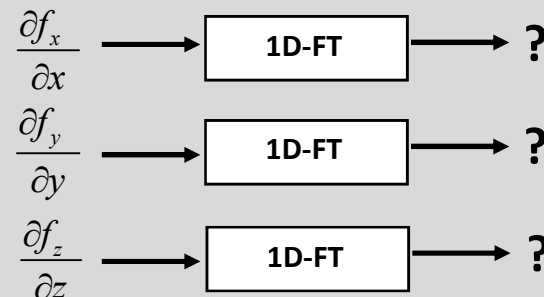

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$


$t \rightarrow \omega$

Frequency domain


$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

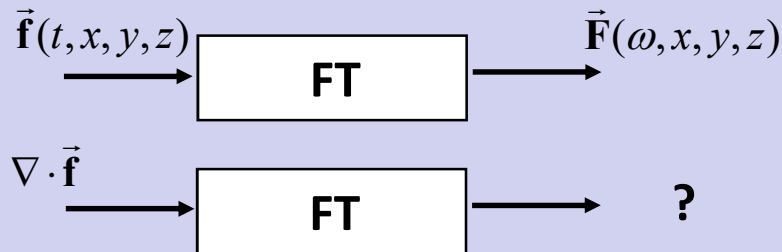

$$\nabla \cdot \vec{\mathbf{f}}(t, \vec{\mathbf{r}}) = \frac{\partial f_x}{\partial x} + \frac{\partial f_y}{\partial y} + \frac{\partial f_z}{\partial z}$$

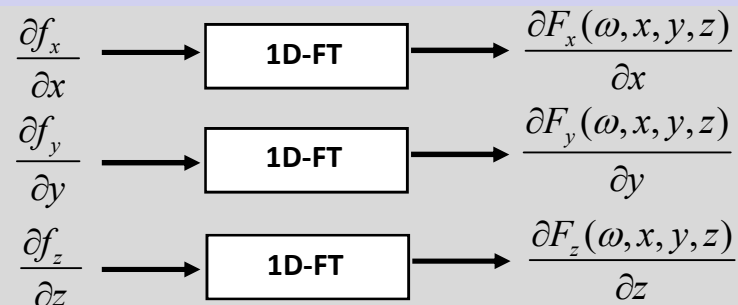

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$

$t \rightarrow \omega$

Frequency domain

$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

$$\vec{\mathbf{f}}(t, x, y, z) \xrightarrow{\text{FT}} \vec{\mathbf{F}}(\omega, x, y, z)$$

$$\nabla \cdot \vec{\mathbf{f}} \xrightarrow{\text{FT}} \nabla \cdot \vec{\mathbf{F}}(\omega, x, y, z)$$

$$\nabla \cdot \vec{\mathbf{f}}(t, \vec{\mathbf{r}}) = \frac{\partial f_x}{\partial x} + \frac{\partial f_y}{\partial y} + \frac{\partial f_z}{\partial z}$$

$$\frac{\partial f_x}{\partial x} \xrightarrow{\text{1D-FT}} \frac{\partial F_x(\omega, x, y, z)}{\partial x}$$

$$\frac{\partial f_y}{\partial y} \xrightarrow{\text{1D-FT}} \frac{\partial F_y(\omega, x, y, z)}{\partial y}$$

$$\frac{\partial f_z}{\partial z} \xrightarrow{\text{1D-FT}} \frac{\partial F_z(\omega, x, y, z)}{\partial z}$$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{\mathbf{f}}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$

$t \rightarrow \omega$

Frequency domain

$$\vec{\mathbf{F}}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

$$\vec{\mathbf{f}}(t, x, y, z) \xrightarrow{\text{FT}} \vec{\mathbf{F}}(\omega, x, y, z)$$

$$\nabla \times \vec{\mathbf{f}} \xrightarrow{\text{FT}} \nabla \times \vec{\mathbf{F}}(\omega, x, y, z)$$

$$\nabla \times \vec{\mathbf{f}}(t, \vec{\mathbf{r}}) = \left(\frac{\partial f_z}{\partial y} - \frac{\partial f_y}{\partial z} \right) \hat{i}_x + \left(\frac{\partial f_x}{\partial z} - \frac{\partial f_z}{\partial x} \right) \hat{i}_y + \left(\frac{\partial f_y}{\partial x} - \frac{\partial f_x}{\partial y} \right) \hat{i}_z$$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{f}(t, x, y, z) = f_x(t, x, y, z)\hat{i}_x + f_y(t, x, y, z)\hat{i}_y + f_z(t, x, y, z)\hat{i}_z$$

$t \rightarrow \omega$

Frequency domain

$$\vec{F}(\omega, x, y, z) = F_x(\omega, x, y, z)\hat{i}_x + F_y(\omega, x, y, z)\hat{i}_y + F_z(\omega, x, y, z)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

$$\vec{f}(t, x, y, z) \longrightarrow \text{FT} \longrightarrow \vec{F}(\omega, x, y, z)$$

$$\frac{\partial \vec{f}}{\partial t} \longrightarrow \text{FT} \longrightarrow j\omega \vec{F}(\omega, x, y, z)$$

$$\nabla \cdot \vec{f} \longrightarrow \text{FT} \longrightarrow \nabla \cdot \vec{F}(\omega, x, y, z)$$

$$\nabla \times \vec{f} \longrightarrow \text{FT} \longrightarrow \nabla \times \vec{F}(\omega, x, y, z)$$

Fourier Transform and vector functions of n variables

Time domain

$$\vec{f}(x, y, z, t) = f_x(x, y, z, t)\hat{i}_x + f_y(x, y, z, t)\hat{i}_y + f_z(x, y, z, t)\hat{i}_z$$

$t \rightarrow \omega$

Frequency domain

$$\vec{F}(x, y, z, \omega) = F_x(x, y, z, \omega)\hat{i}_x + F_y(x, y, z, \omega)\hat{i}_y + F_z(x, y, z, \omega)\hat{i}_z$$

2) Time domain derivative and Fourier Transform

$t \rightarrow \omega$

$$\vec{f}(x, y, z, t) \longrightarrow \boxed{\text{FT}} \longrightarrow \vec{F}(x, y, z, \omega)$$

$$\frac{\partial \vec{f}}{\partial t} \longrightarrow \boxed{\text{FT}} \longrightarrow j\omega \vec{F}(x, y, z, \omega)$$

$$\nabla \cdot \vec{f} \longrightarrow \boxed{\text{FT}} \longrightarrow \nabla \cdot \vec{F}(x, y, z, \omega)$$

$$\nabla \times \vec{f} \longrightarrow \boxed{\text{FT}} \longrightarrow \nabla \times \vec{F}(x, y, z, \omega)$$



Maxwell equations

Time domain & Frequency domain

Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{array} \right.$$



Maxwell equations

Time domain & Frequency domain

Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain



Maxwell equations

Time domain & Frequency domain

Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$\vec{\mathbf{f}}(x, y, z, t)$	→	FT	→	$\vec{\mathbf{F}}(x, y, z, \omega)$	$t \rightarrow \omega$
$\frac{\partial \vec{\mathbf{f}}}{\partial t}$	→	FT	→	$j\omega \vec{\mathbf{F}}(x, y, z, \omega)$	
$\nabla \cdot \vec{\mathbf{f}}$	→	FT	→	$\nabla \cdot \vec{\mathbf{F}}(x, y, z, \omega)$	
$\nabla \times \vec{\mathbf{f}}$	→	FT	→	$\nabla \times \vec{\mathbf{F}}(x, y, z, \omega)$	



Maxwell equations



Time domain & Frequency domain

Time domain

$$\begin{cases} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{cases}$$

$t \rightarrow \omega$

Frequency domain

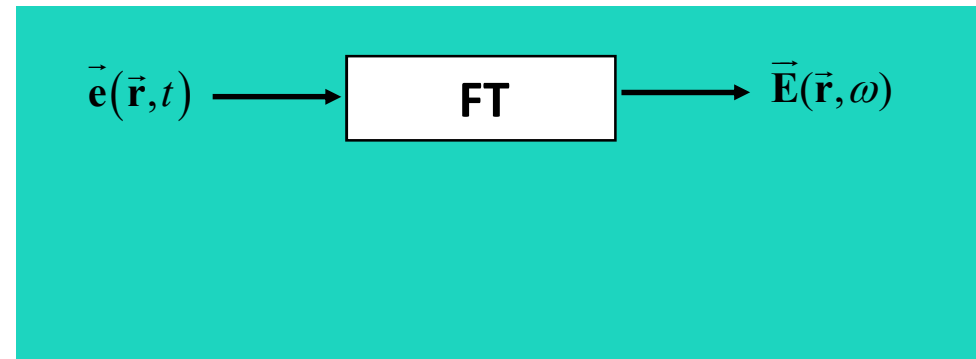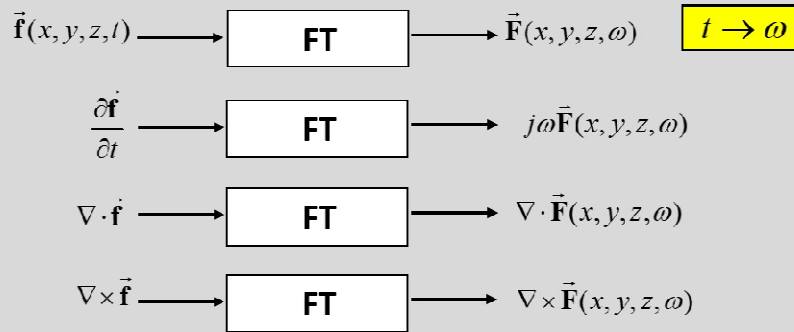



Maxwell equations

Time domain & Frequency domain



Time domain

$$\begin{cases} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{cases}$$

$t \rightarrow \omega$

Frequency domain

Empty space reserved for the frequency domain equations.

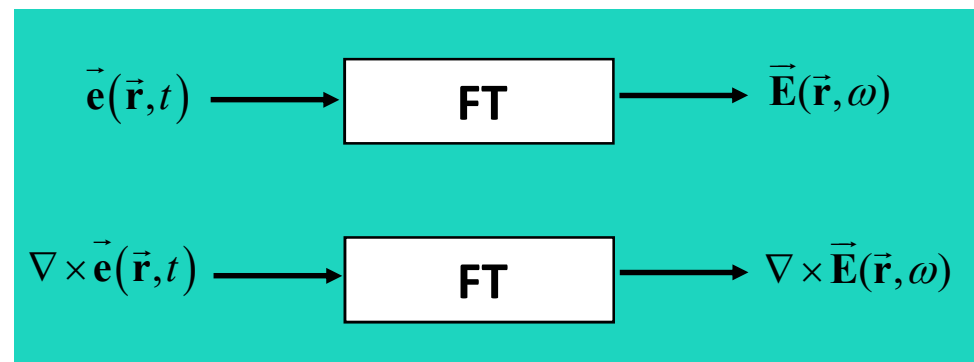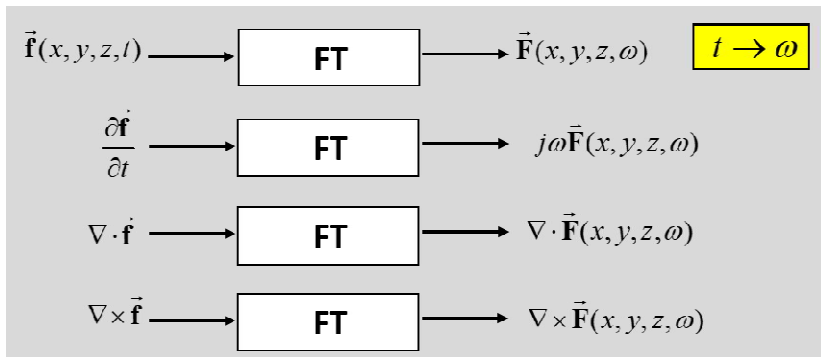



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) \end{array} \right.$$

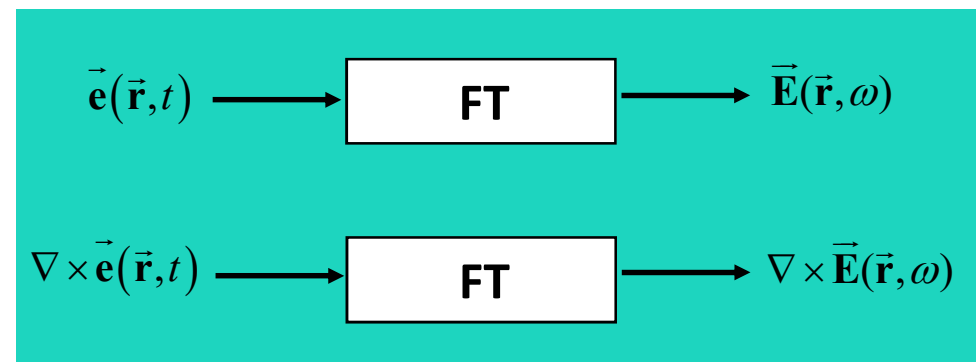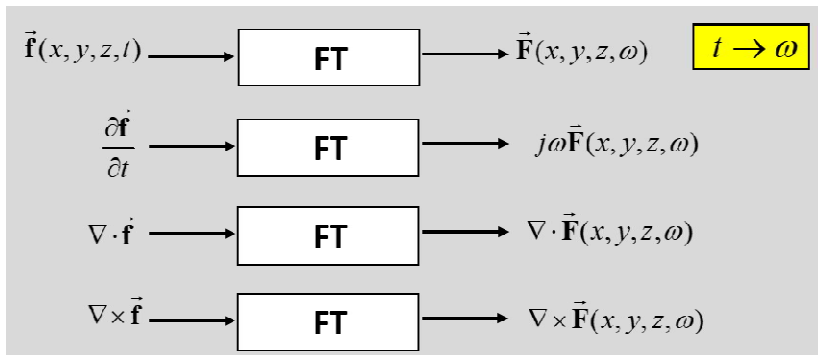



Maxwell equations

Time domain & Frequency domain


Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \\ \nabla \cdot \vec{B}(\vec{r}, \omega) = 0 \end{array} \right.$$

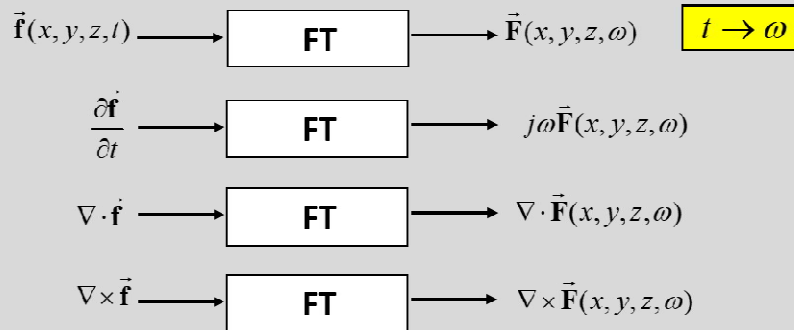



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \\ \nabla \cdot \vec{B}(\vec{r}, \omega) = 0 \end{array} \right.$$

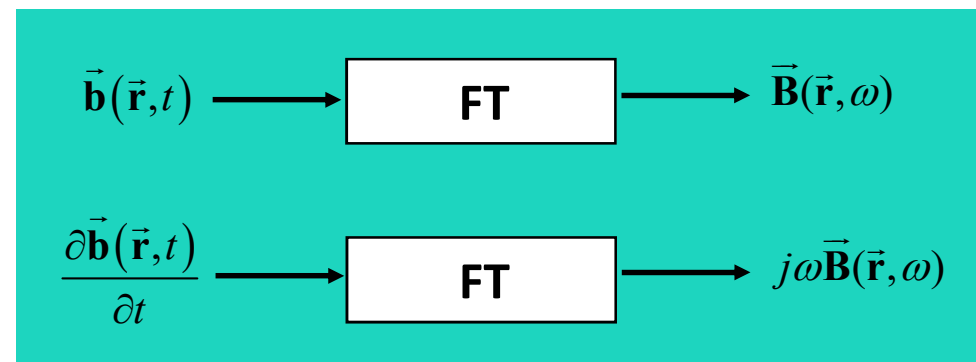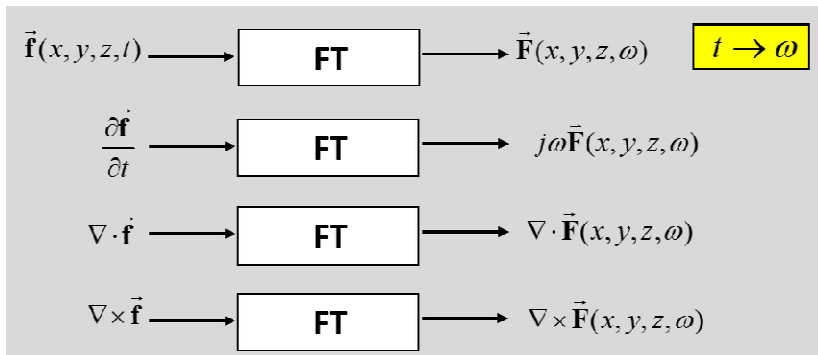



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \end{array} \right.$$

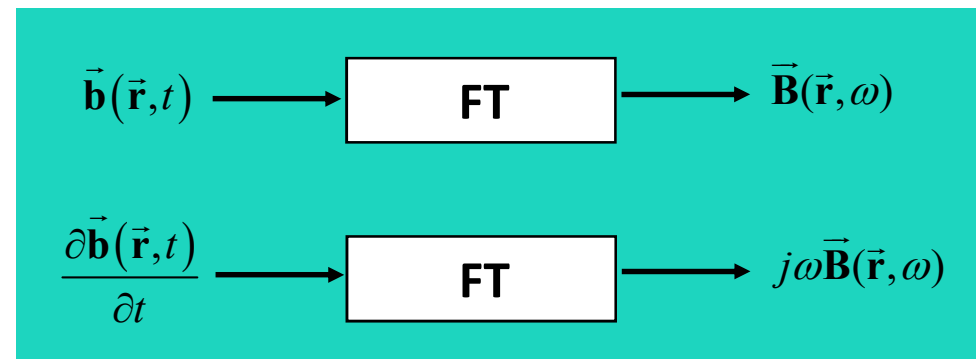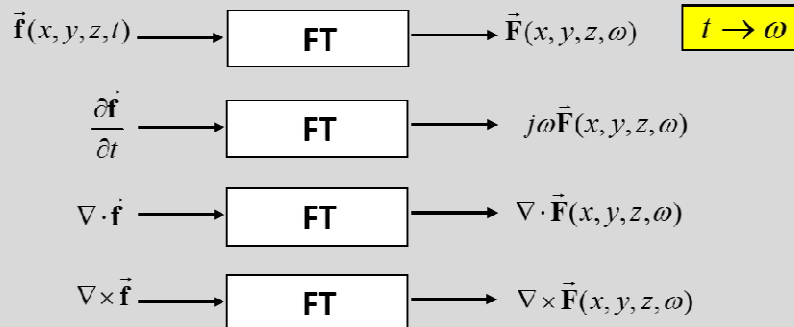



Maxwell equations

Time domain & Frequency domain


Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \end{array} \right.$$

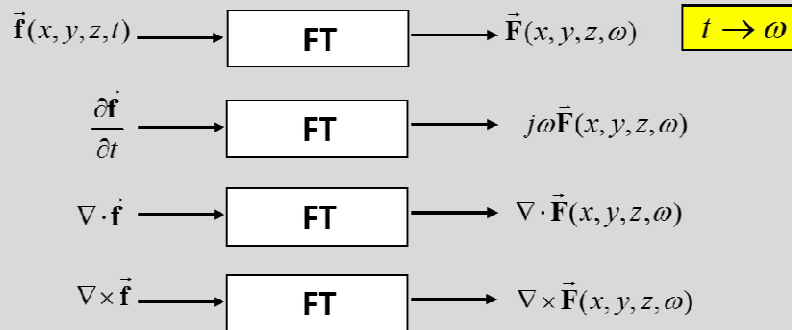



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \end{array} \right.$$

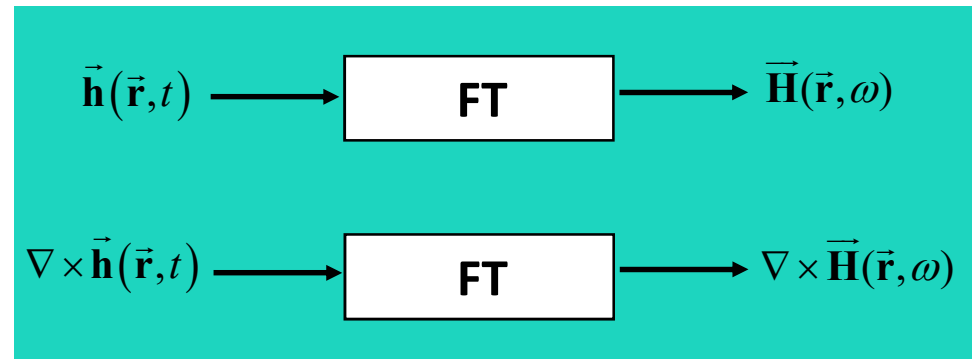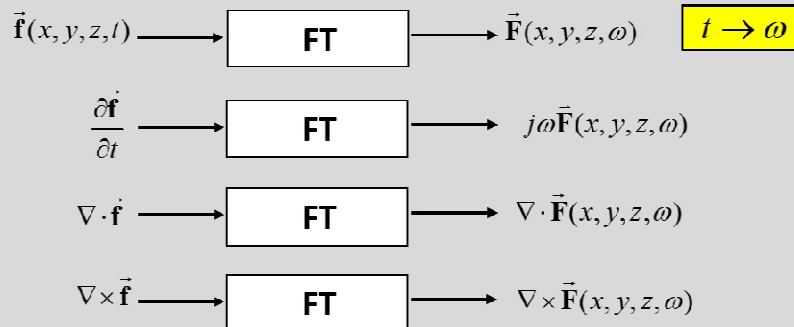



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) \end{array} \right.$$

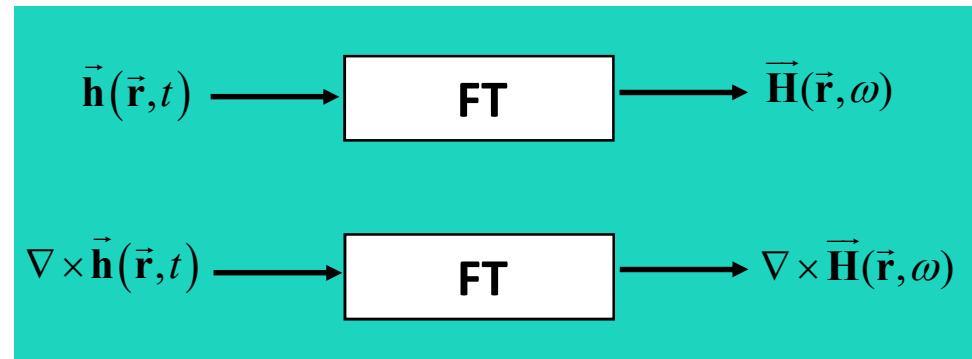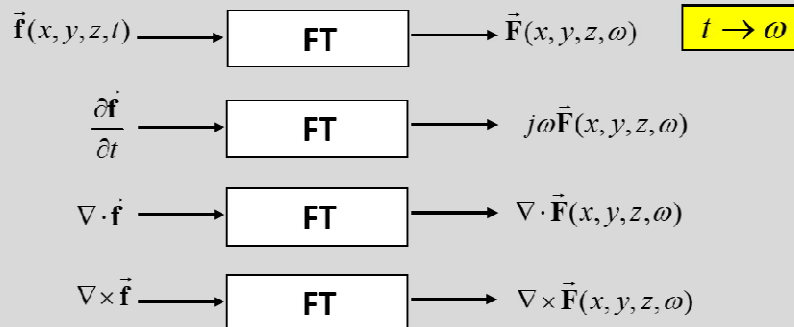



Maxwell equations

Time domain & Frequency domain


Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) \end{array} \right.$$

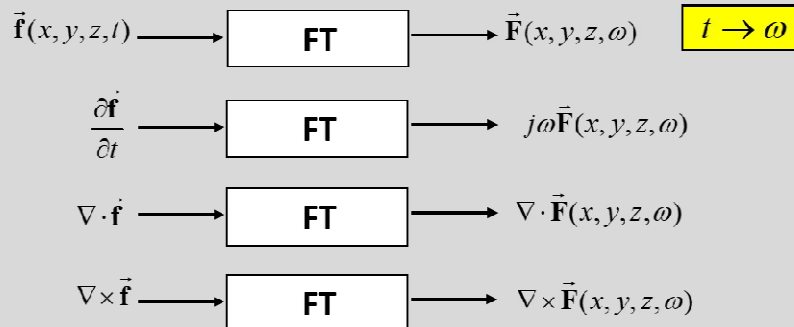



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) \end{array} \right.$$

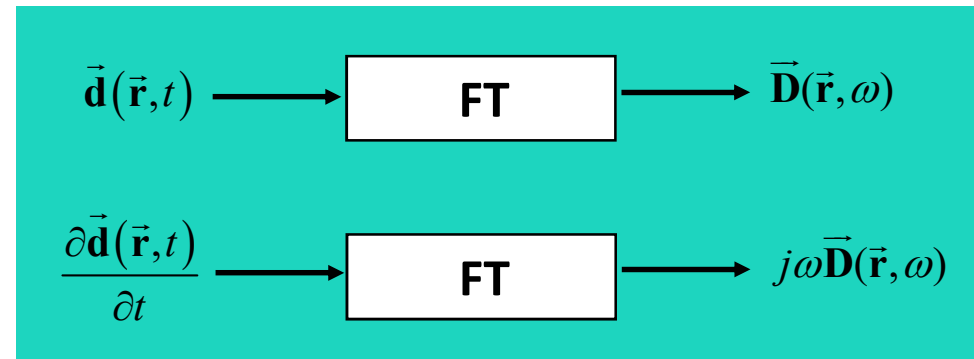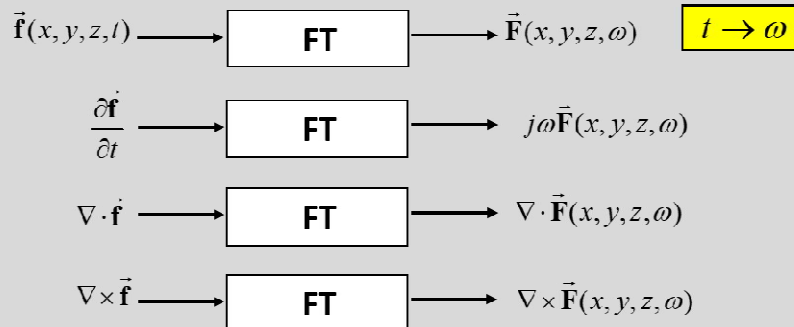



Maxwell equations

Time domain & Frequency domain



Time domain

$$\begin{cases} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{cases}$$

$t \rightarrow \omega$

Frequency domain

$$\begin{cases} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) \end{cases}$$

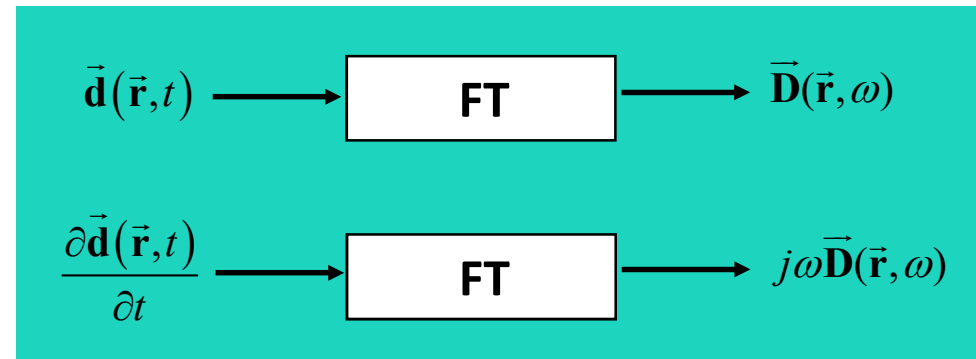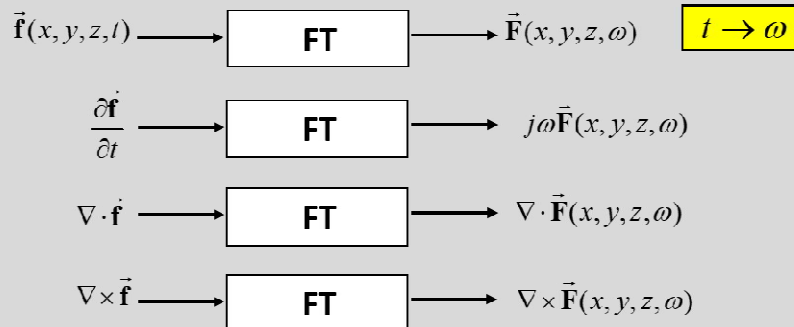



Maxwell equations

Time domain & Frequency domain


Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}}(\vec{\mathbf{r}}, \omega) = -j\omega \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) \\ \nabla \times \vec{\mathbf{H}}(\vec{\mathbf{r}}, \omega) = j\omega \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) \end{array} \right.$$

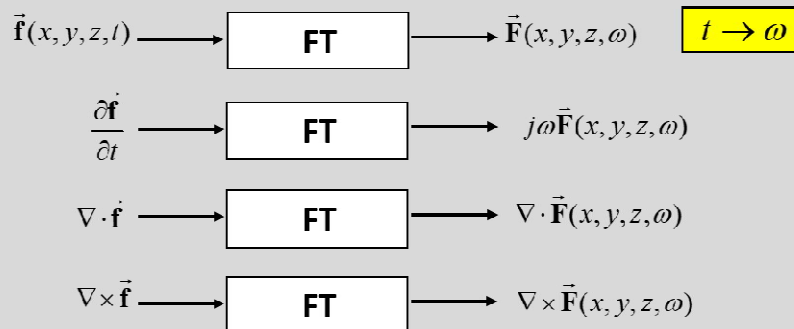



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \end{array} \right.$$

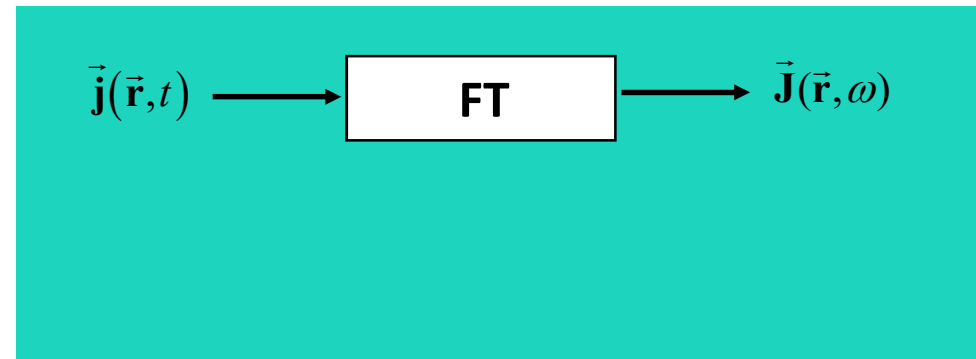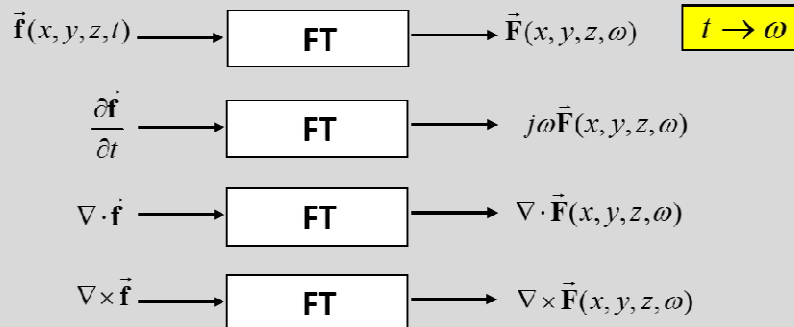



Maxwell equations

Time domain & Frequency domain


Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \end{array} \right.$$

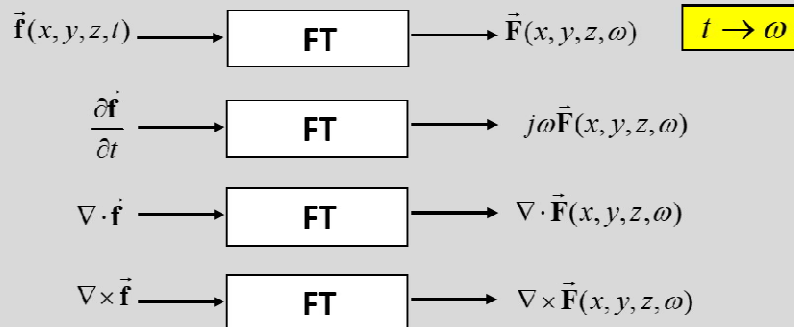



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \end{array} \right.$$

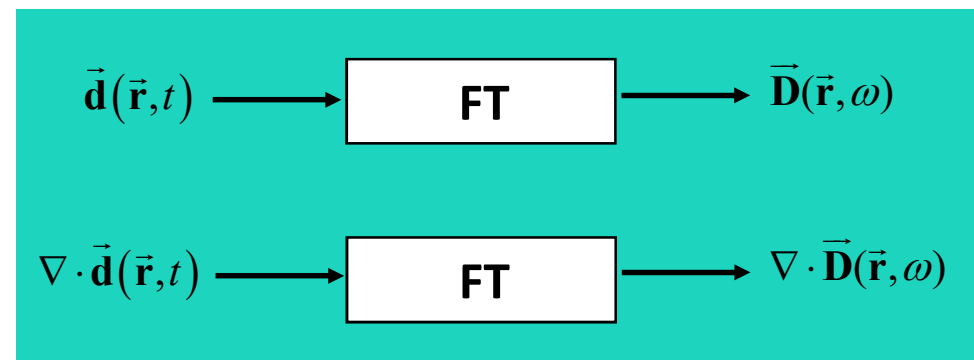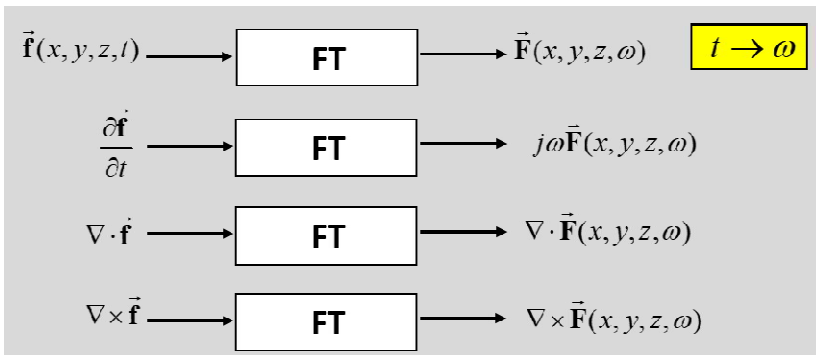



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) \end{array} \right.$$

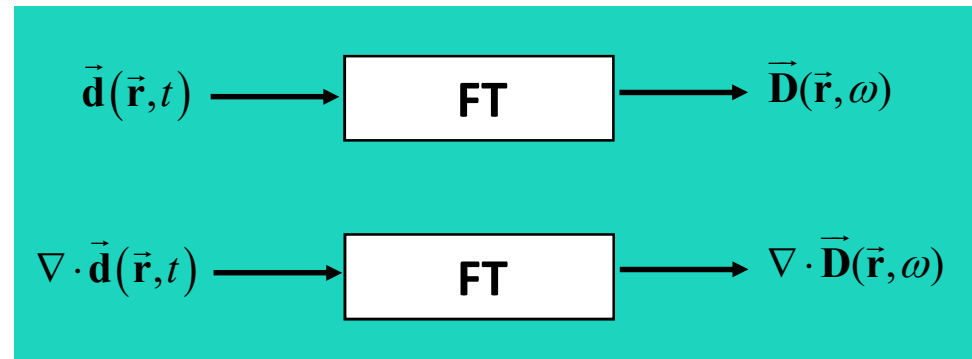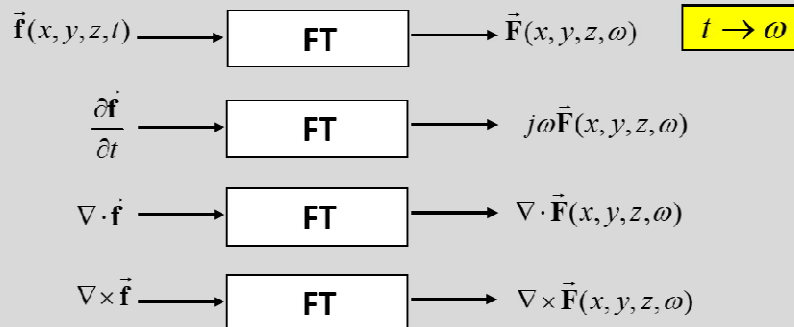



Maxwell equations

Time domain & Frequency domain



Time domain

$$\begin{cases} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{cases}$$

$t \rightarrow \omega$

Frequency domain

$$\begin{cases} \nabla \times \vec{\mathbf{E}}(\vec{\mathbf{r}}, \omega) = -j\omega \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) \\ \nabla \times \vec{\mathbf{H}}(\vec{\mathbf{r}}, \omega) = j\omega \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) + \vec{\mathbf{J}}(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) \end{cases}$$

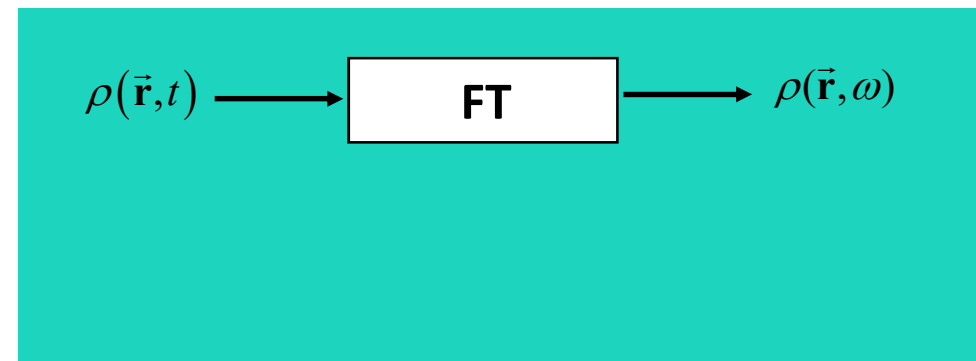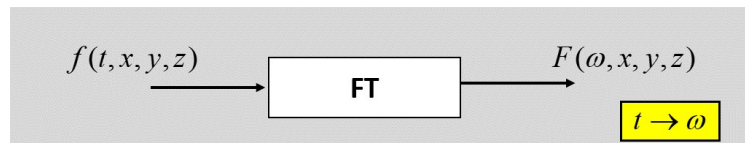



Maxwell equations

Time domain & Frequency domain



Time domain

$$\begin{cases} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{cases}$$

$t \rightarrow \omega$

Frequency domain

$$\begin{cases} \nabla \times \vec{\mathbf{E}}(\vec{\mathbf{r}}, \omega) = -j\omega \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) \\ \nabla \times \vec{\mathbf{H}}(\vec{\mathbf{r}}, \omega) = j\omega \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) + \vec{\mathbf{J}}(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) = \rho(\vec{\mathbf{r}}, \omega) \end{cases}$$

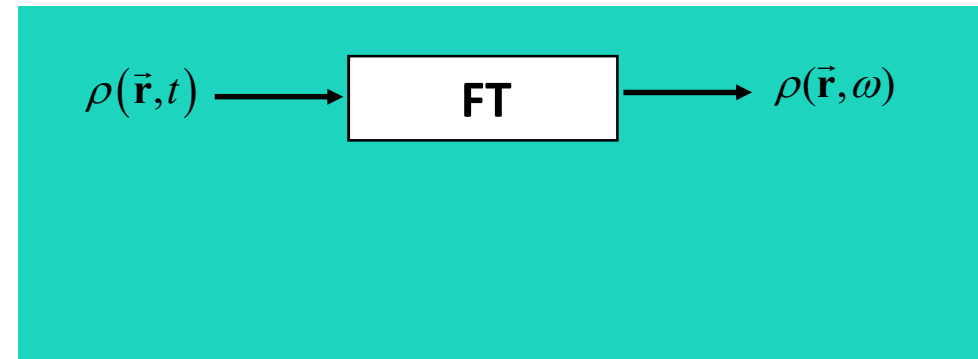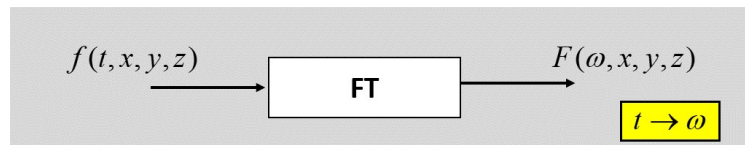



Maxwell equations

Time domain & Frequency domain


Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \end{array} \right.$$

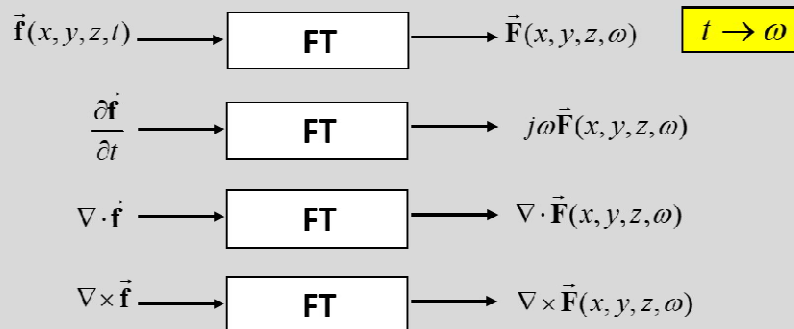



Maxwell equations

Time domain & Frequency domain



Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \end{array} \right.$$

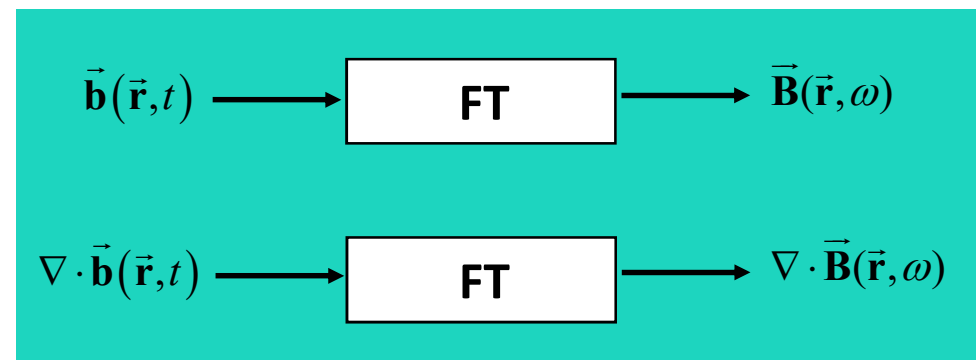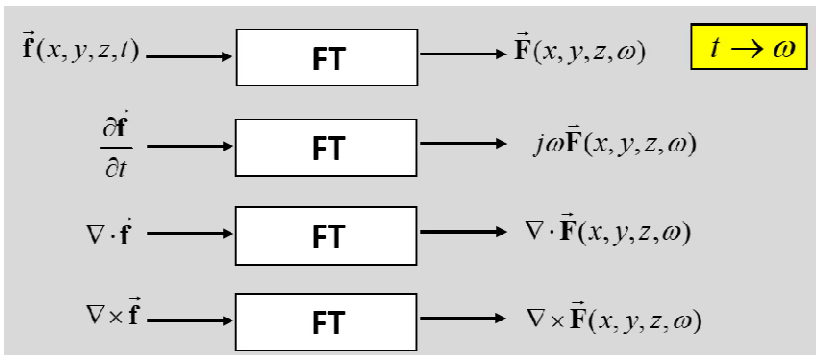



Maxwell equations

Time domain & Frequency domain



Time domain

$$\begin{cases} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{cases}$$

$t \rightarrow \omega$

Frequency domain

$$\begin{cases} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \\ \nabla \cdot \vec{B}(\vec{r}, \omega) = 0 \end{cases}$$

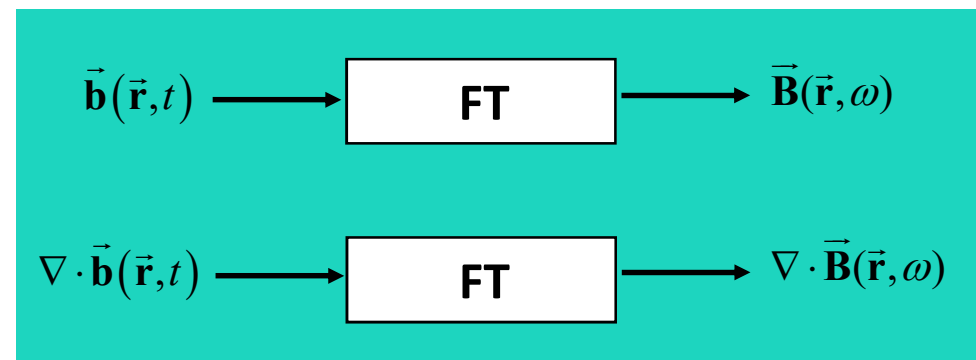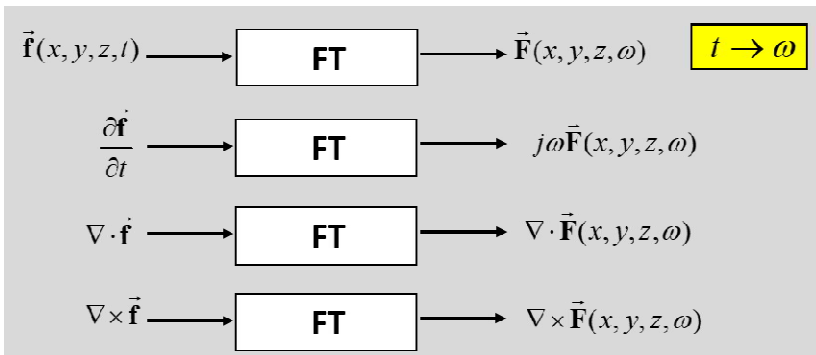



Maxwell equations

Time domain & Frequency domain

Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}}(\vec{\mathbf{r}}, \omega) = -j\omega \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) \\ \nabla \times \vec{\mathbf{H}}(\vec{\mathbf{r}}, \omega) = j\omega \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) + \vec{\mathbf{J}}(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) = \rho(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) = 0 \end{array} \right.$$



Maxwell equations

Time domain & Frequency domain

Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{array} \right.$$

$t \rightarrow \omega$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}}(\vec{\mathbf{r}}, \omega) = -j\omega \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) \\ \nabla \times \vec{\mathbf{H}}(\vec{\mathbf{r}}, \omega) = j\omega \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) + \vec{\mathbf{J}}(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) = \rho(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) = 0 \end{array} \right.$$



Maxwell equations

Time domain & Frequency domain

Time domain		Frequency domain
$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$	$t \rightarrow \omega$	$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \\ \nabla \cdot \vec{B}(\vec{r}, \omega) = 0 \end{array} \right.$

$\vec{e}(\vec{r}, t)$	Volt/m
$\vec{d}(\vec{r}, t)$	Coulomb/m ²
$\vec{h}(\vec{r}, t)$	Ampere/m
$\vec{b}(\vec{r}, t)$	Weber/m ²
$\vec{j}(\vec{r}, t)$	Ampere/m ²
$\rho(\vec{r}, t)$	Coulomb/m ³



Maxwell equations

Time domain & Frequency domain

Time domain		Frequency domain
$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$	<div style="border: 1px solid black; background-color: yellow; display: inline-block; padding: 2px 10px;"> $t \rightarrow \omega$ </div>	$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \\ \nabla \cdot \vec{B}(\vec{r}, \omega) = 0 \end{array} \right.$

$\vec{e}(\vec{r}, t)$	Volt/m
$\vec{d}(\vec{r}, t)$	Coulomb/m ²
$\vec{h}(\vec{r}, t)$	Ampere/m
$\vec{b}(\vec{r}, t)$	Weber/m ²
$\vec{j}(\vec{r}, t)$	Ampere/m ²
$\rho(\vec{r}, t)$	Coulomb/m ³

$\vec{E}(\vec{r}, \omega)$
$\vec{D}(\vec{r}, \omega)$
$\vec{H}(\vec{r}, \omega)$
$\vec{B}(\vec{r}, \omega)$
$\vec{J}(\vec{r}, \omega)$
$\rho(\vec{r}, \omega)$




Maxwell equations

Time domain & Frequency domain

Time domain		Frequency domain
$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$	<div style="background-color: yellow; border: 1px solid black; padding: 2px; display: inline-block;">$t \rightarrow \omega$</div>	$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \\ \nabla \cdot \vec{B}(\vec{r}, \omega) = 0 \end{array} \right.$

- $\vec{e}(\vec{r}, t)$ Volt/m
- $\vec{d}(\vec{r}, t)$ Coulomb/m²
- $\vec{h}(\vec{r}, t)$ Ampere/m
- $\vec{b}(\vec{r}, t)$ Weber/m²
- $\vec{j}(\vec{r}, t)$ Ampere/m²
- $\rho(\vec{r}, t)$ Coulomb/m³

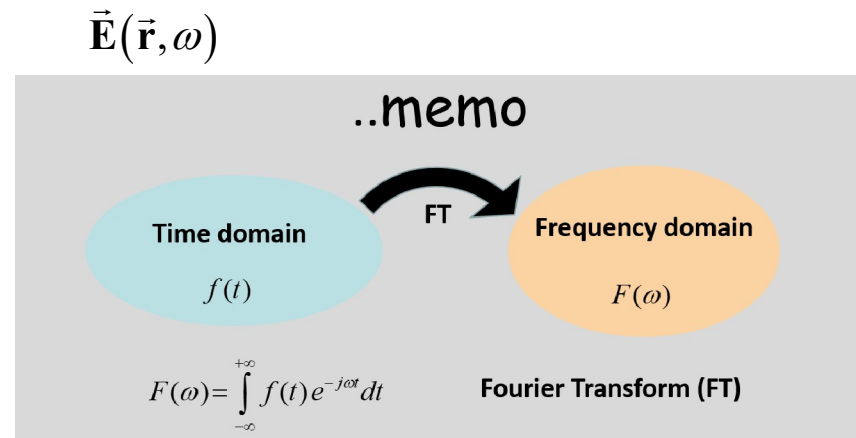




Maxwell equations

Time domain & Frequency domain

Time domain		Frequency domain
$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$	<div style="background-color: yellow; border: 1px solid black; padding: 2px; display: inline-block;">$t \rightarrow \omega$</div>	$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \\ \nabla \cdot \vec{B}(\vec{r}, \omega) = 0 \end{array} \right.$

- $\vec{e}(\vec{r}, t)$ Volt/m
- $\vec{d}(\vec{r}, t)$ Coulomb/m²
- $\vec{h}(\vec{r}, t)$ Ampere/m
- $\vec{b}(\vec{r}, t)$ Weber/m²
- $\vec{j}(\vec{r}, t)$ Ampere/m²
- $\rho(\vec{r}, t)$ Coulomb/m³

$\vec{E}(\vec{r}, \omega)$ (Volt x s) /m

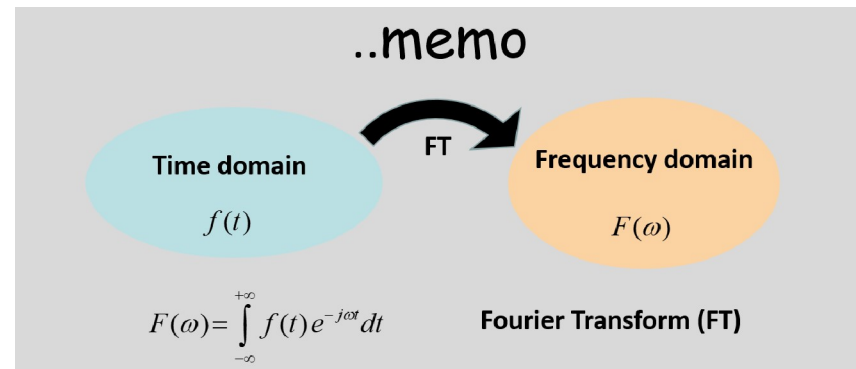



Maxwell equations

Time domain & Frequency domain

Time domain		Frequency domain
$\left\{ \begin{array}{l} \nabla \times \vec{e}(\vec{r}, t) = -\frac{\partial \vec{b}(\vec{r}, t)}{\partial t} \\ \nabla \times \vec{h}(\vec{r}, t) = \frac{\partial \vec{d}(\vec{r}, t)}{\partial t} + \vec{j}(\vec{r}, t) \\ \nabla \cdot \vec{d}(\vec{r}, t) = \rho(\vec{r}, t) \\ \nabla \cdot \vec{b}(\vec{r}, t) = 0 \end{array} \right.$	<div style="border: 1px solid black; background-color: yellow; display: inline-block; padding: 2px 10px;"> $t \rightarrow \omega$ </div>	$\left\{ \begin{array}{l} \nabla \times \vec{E}(\vec{r}, \omega) = -j\omega \vec{B}(\vec{r}, \omega) \\ \nabla \times \vec{H}(\vec{r}, \omega) = j\omega \vec{D}(\vec{r}, \omega) + \vec{J}(\vec{r}, \omega) \\ \nabla \cdot \vec{D}(\vec{r}, \omega) = \rho(\vec{r}, \omega) \\ \nabla \cdot \vec{B}(\vec{r}, \omega) = 0 \end{array} \right.$

$\vec{e}(\vec{r}, t)$	Volt/m
$\vec{d}(\vec{r}, t)$	Coulomb/m ²
$\vec{h}(\vec{r}, t)$	Ampere/m
$\vec{b}(\vec{r}, t)$	Weber/m ²
$\vec{j}(\vec{r}, t)$	Ampere/m ²
$\rho(\vec{r}, t)$	Coulomb/m ³

$\vec{E}(\vec{r}, \omega)$	(Volt x s) /m
$\vec{D}(\vec{r}, \omega)$	(Coulomb x s)/m ²
$\vec{H}(\vec{r}, \omega)$	(Ampere x s)/m
$\vec{B}(\vec{r}, \omega)$	(Weber x s)/m ²
$\vec{J}(\vec{r}, \omega)$	(Ampere x s)/m ²
$\rho(\vec{r}, \omega)$	(Coulomb x s)/m ³



Maxwell equations

Time domain & Frequency domain

Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{array} \right.$$

$$t \rightarrow \omega$$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}}(\vec{\mathbf{r}}, \omega) = -j\omega \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) \\ \nabla \times \vec{\mathbf{H}}(\vec{\mathbf{r}}, \omega) = j\omega \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) + \vec{\mathbf{J}}(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) = \rho(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) = 0 \end{array} \right.$$



Maxwell equations

Time domain & Frequency domain

Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{array} \right.$$

$$t \rightarrow \omega$$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}}(\vec{\mathbf{r}}, \omega) = -j\omega \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) \\ \nabla \times \vec{\mathbf{H}}(\vec{\mathbf{r}}, \omega) = j\omega \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) + \vec{\mathbf{J}}(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) = \rho(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) = 0 \end{array} \right.$$

$$\frac{\partial \rho(\vec{\mathbf{r}}, t)}{\partial t} + \nabla \cdot \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) = 0$$



Maxwell equations

Time domain & Frequency domain

Time domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{e}}(\vec{\mathbf{r}}, t) = -\frac{\partial \vec{\mathbf{b}}(\vec{\mathbf{r}}, t)}{\partial t} \\ \nabla \times \vec{\mathbf{h}}(\vec{\mathbf{r}}, t) = \frac{\partial \vec{\mathbf{d}}(\vec{\mathbf{r}}, t)}{\partial t} + \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{d}}(\vec{\mathbf{r}}, t) = \rho(\vec{\mathbf{r}}, t) \\ \nabla \cdot \vec{\mathbf{b}}(\vec{\mathbf{r}}, t) = 0 \end{array} \right.$$

$$t \rightarrow \omega$$

Frequency domain

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}}(\vec{\mathbf{r}}, \omega) = -j\omega \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) \\ \nabla \times \vec{\mathbf{H}}(\vec{\mathbf{r}}, \omega) = j\omega \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) + \vec{\mathbf{J}}(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{D}}(\vec{\mathbf{r}}, \omega) = \rho(\vec{\mathbf{r}}, \omega) \\ \nabla \cdot \vec{\mathbf{B}}(\vec{\mathbf{r}}, \omega) = 0 \end{array} \right.$$

$$\frac{\partial \rho(\vec{\mathbf{r}}, t)}{\partial t} + \nabla \cdot \vec{\mathbf{j}}(\vec{\mathbf{r}}, t) = 0$$

$$j\omega \rho(\vec{\mathbf{r}}, \omega) + \nabla \cdot \vec{\mathbf{J}}(\vec{\mathbf{r}}, \omega) = 0$$

Maxwell equations

Time domain & Phasors



Phasors

Time domain

$$f(t)$$

Phasors


Time domain

$$f(t)$$

Signals usually adopted in ICT applications

$$f(t) = A(t) \cos(2\pi f_0 t + \alpha(t))$$

..... Memo

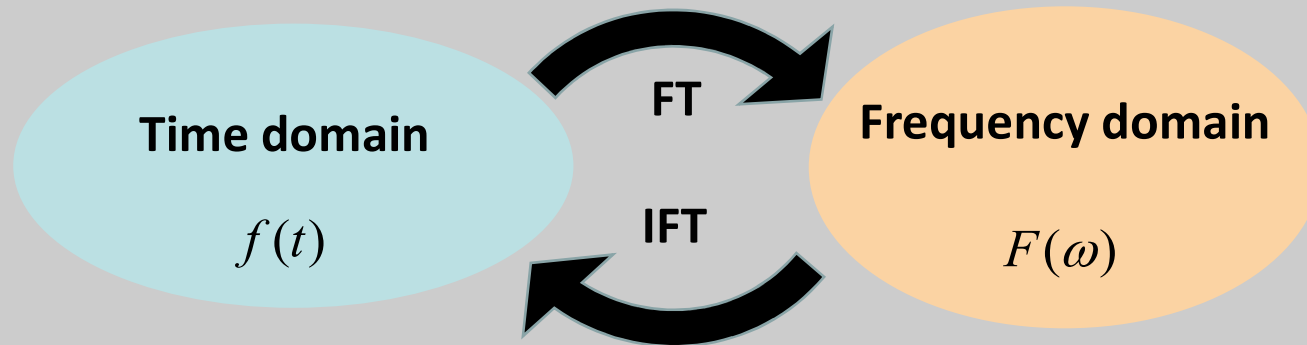


$$f(t) \xrightarrow{\text{FT}} F(\omega) = \int_{-\infty}^{+\infty} f(t) e^{-j\omega t} dt$$

$$F(\omega) \xrightarrow{\text{IFT}} f(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} F(\omega) e^{j\omega t} d\omega = \frac{1}{2\pi} \left[\int_{-\infty}^{+\infty} F(\omega) \cos(\omega t) d\omega + j \int_{-\infty}^{+\infty} F(\omega) \sin(\omega t) d\omega \right]$$

Bandwidth

$$f(t) \longrightarrow \boxed{\text{FT}} \longrightarrow F(\omega) = \int_{-\infty}^{+\infty} f(t) e^{-j\omega t} dt$$

$$f(t) = \frac{1}{2\pi} \left[\int_{-\infty}^{+\infty} F(\omega) \cos(\omega t) d\omega + j \int_{-\infty}^{+\infty} F(\omega) \sin(\omega t) d\omega \right]$$

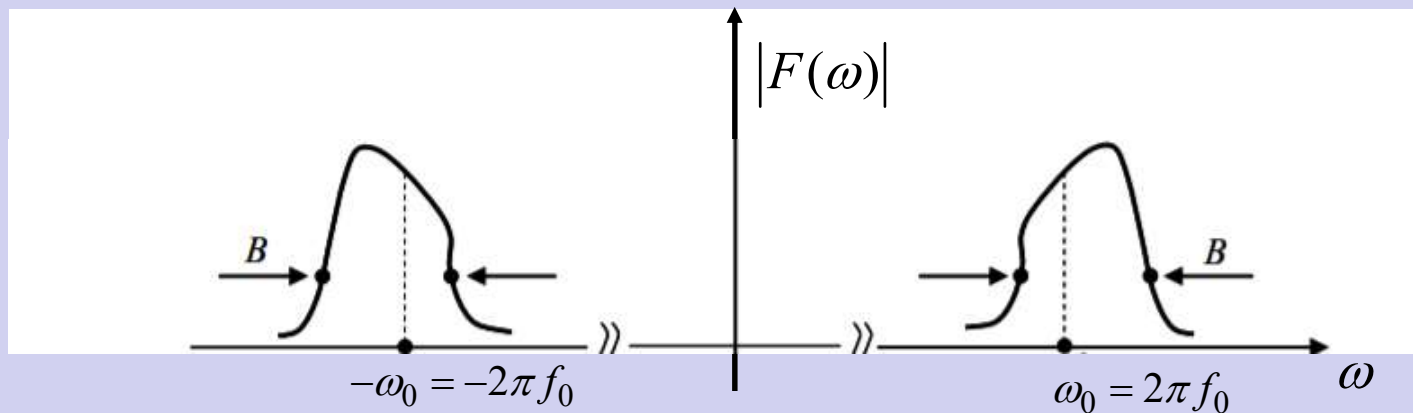

Phasors

Time domain

$$f(t)$$

Signals usually adopted in ICT applications

$$f(t) = A(t) \cos(2\pi f_0 t + \alpha(t))$$

Phasors

Time domain

$$f(t)$$


Signals usually analyzed in ICT applications

$$f(t) = A \cos(2\pi f_0 t + \alpha)$$

Bandwidth

$$f(t) \longrightarrow \boxed{\text{FT}} \longrightarrow F(\omega) = \int_{-\infty}^{+\infty} f(t) e^{-j\omega t} dt$$

$$f(t) = \frac{1}{2\pi} \left[\int_{-\infty}^{+\infty} F(\omega) \cos(\omega t) d\omega + j \int_{-\infty}^{+\infty} F(\omega) \sin(\omega t) d\omega \right]$$

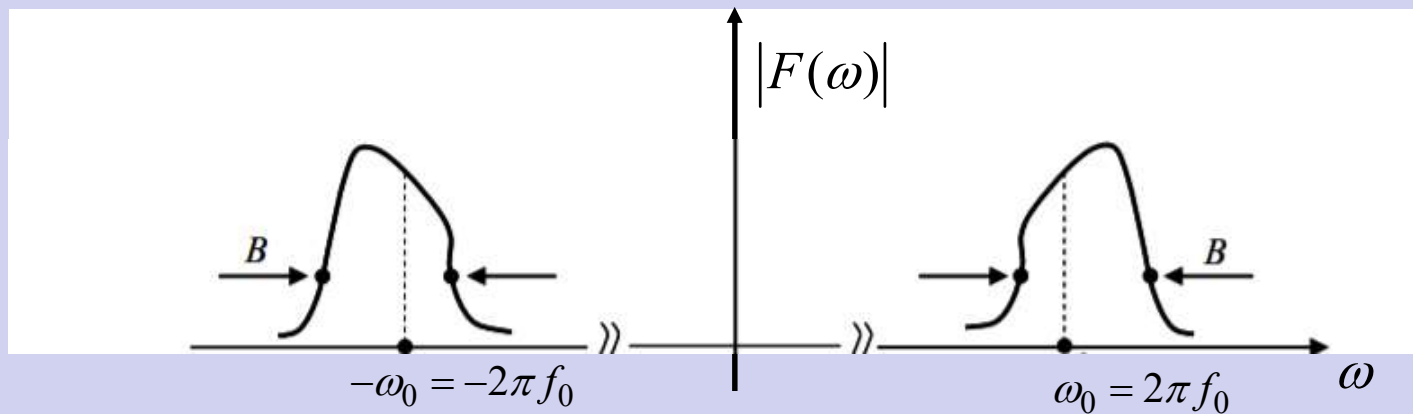


Phasors

Time domain

$f(t)$

Signals usually adopted in ICT applications

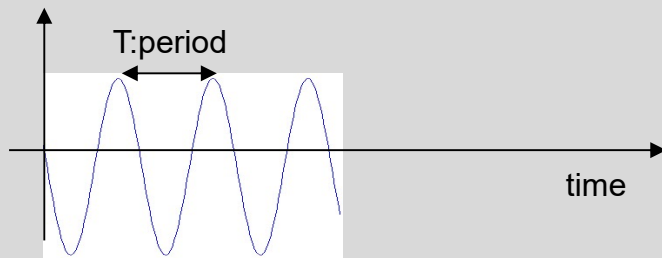


$$f(t) = A \cos(2\pi f_0 t + \alpha)$$


$$f_0 : \text{frequency} = \frac{1}{T}$$

$$\omega_0 : \text{angular frequency} = 2\pi f_0$$

Phasors

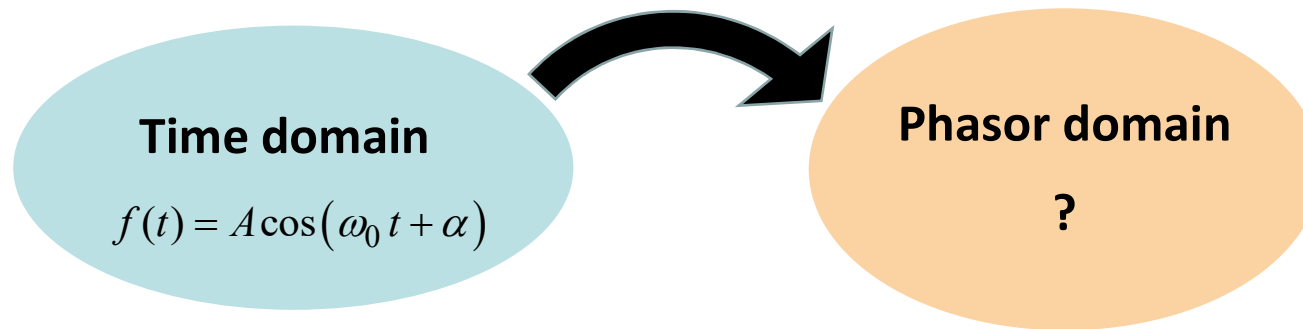

Signals usually adopted in ICT applications

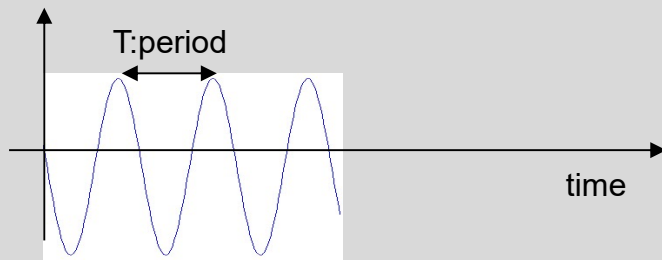


$$f(t) = A \cos(2\pi f_0 t + \alpha)$$


$$f_0 : \text{frequency} = \frac{1}{T}$$

$$\omega_0 : \text{angular frequency} = 2\pi f_0$$

Phasors

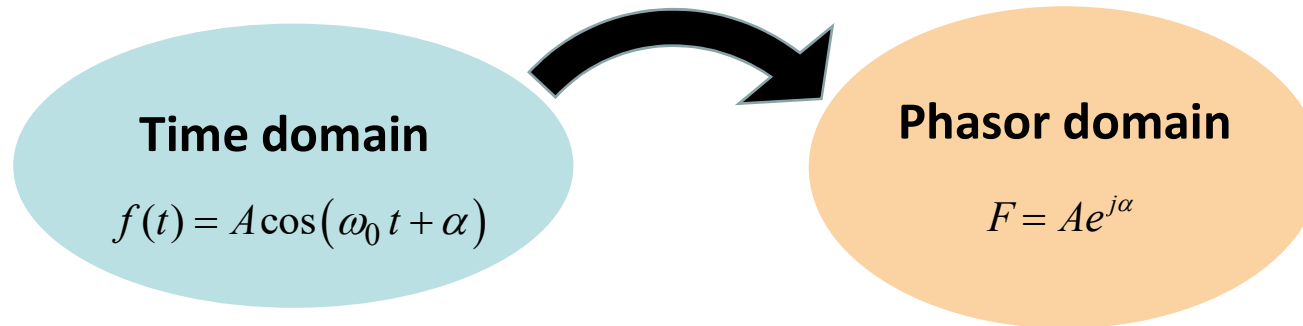

Signals usually adopted in ICT applications

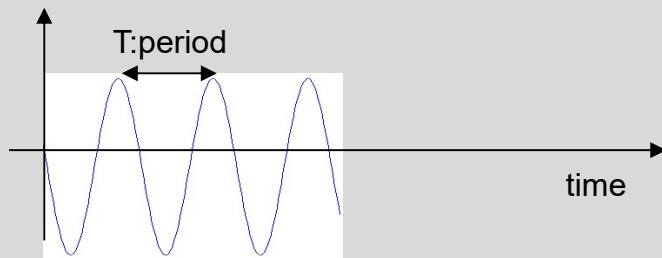


$$f(t) = A \cos(2\pi f_0 t + \alpha)$$

$$f_0 : \text{frequency} = \frac{1}{T}$$


$$\omega_0 : \text{angular frequency} = 2\pi f_0$$

Phasors

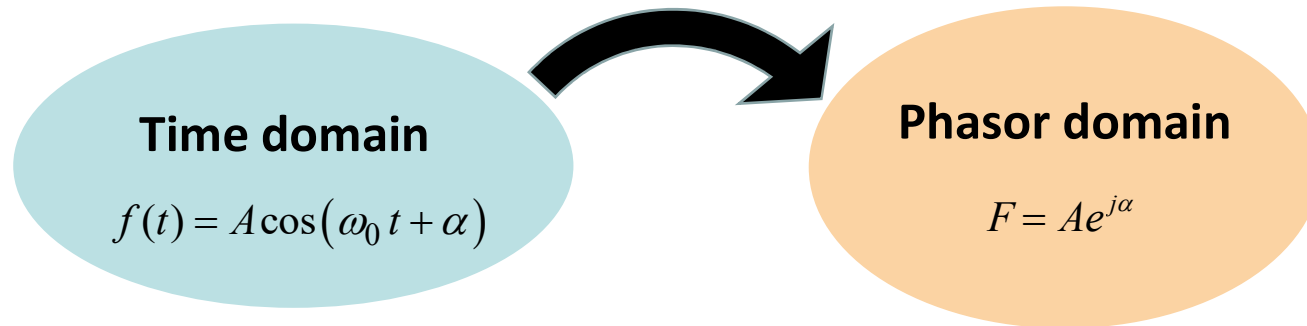


- 1) How to jump back from the Phasor domain to the Time domain
- 2) Time domain derivative and Phasors

Phasors

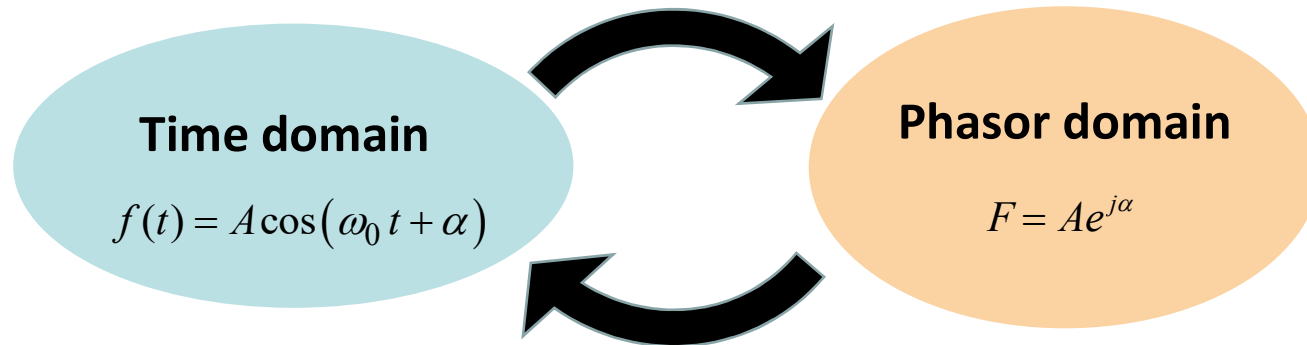

1) How to jump back from the Phasor domain to the Time domain


Phasors

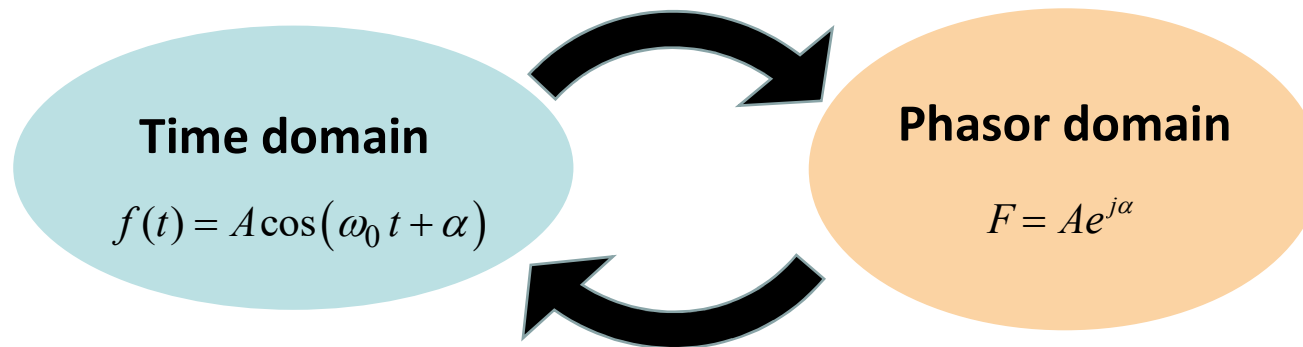

1) How to jump back from the Phasor domain to the Time domain

$$f(t) = \operatorname{Re}\{F e^{j\omega_0 t}\} = \operatorname{Re}\{A e^{j\alpha} e^{j\omega_0 t}\} = A \cos(\omega_0 t + \alpha)$$


Phasors

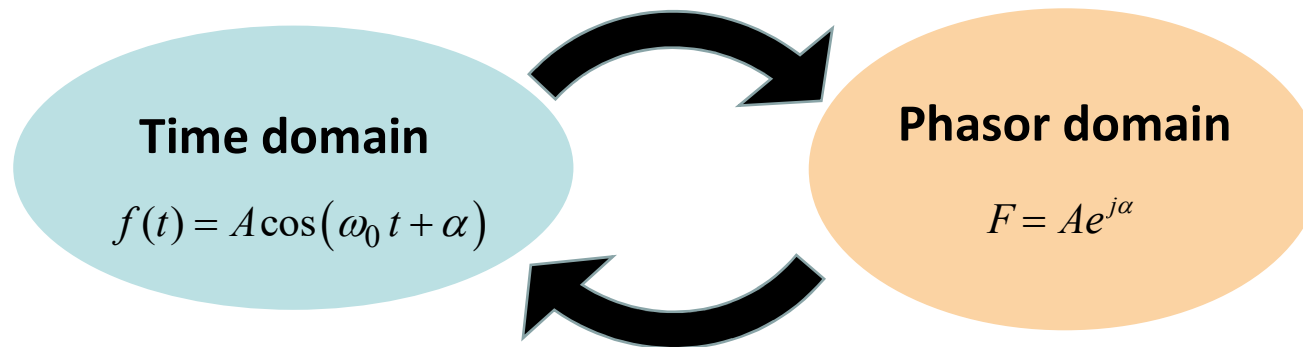


$$f(t) = A \cos(\omega_0 t + \alpha) \longrightarrow \text{T-to-P} \longrightarrow F = A e^{j\alpha}$$

$$F = A e^{j\alpha} \longrightarrow \text{P-to-T} \longrightarrow f(t) = \text{Re}\{F e^{j\omega_0 t}\} = A \cos(\omega_0 t + \alpha)$$


Phasors

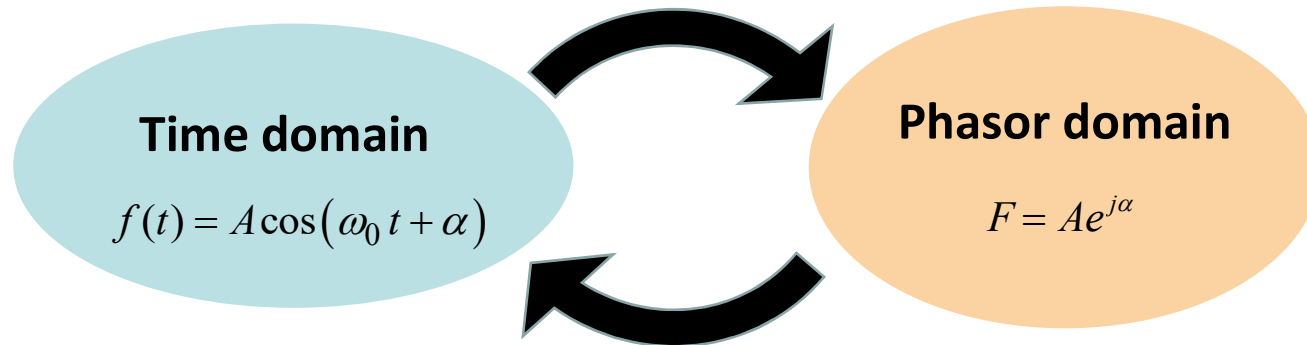


2) Time domain derivative and Phasors

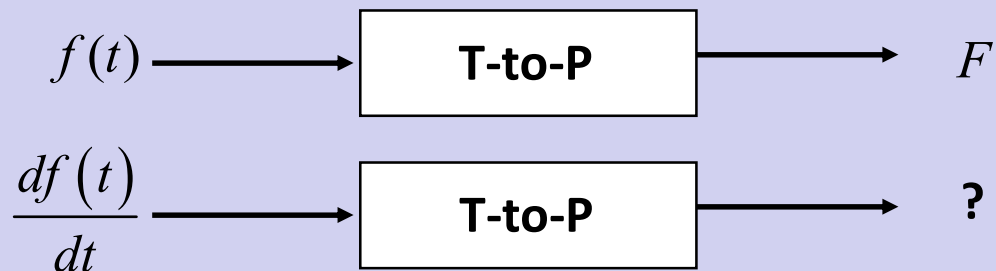



Phasors

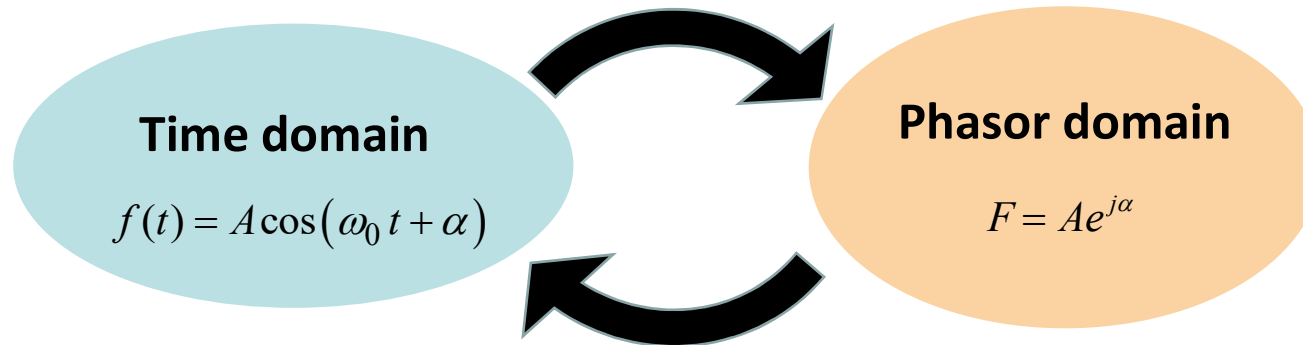


2) Time domain derivative and Phasors

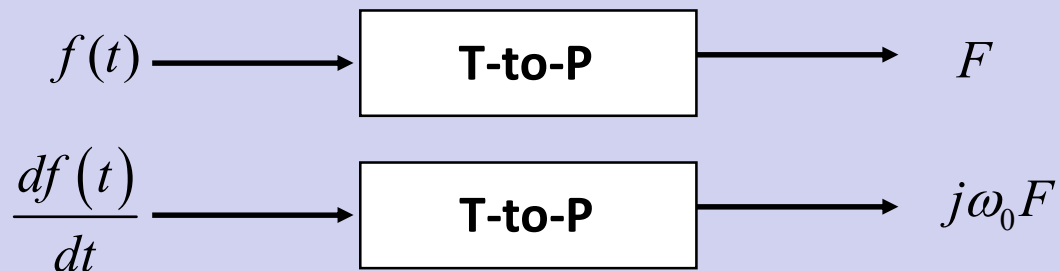



Phasors

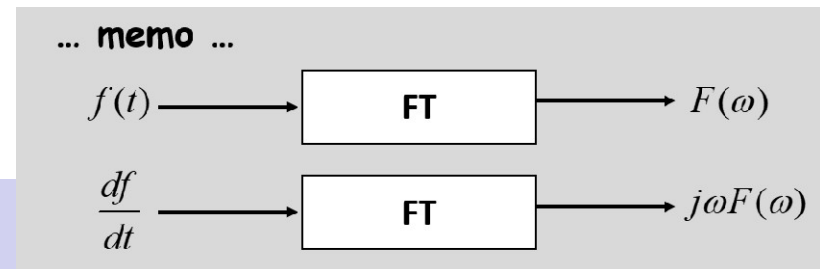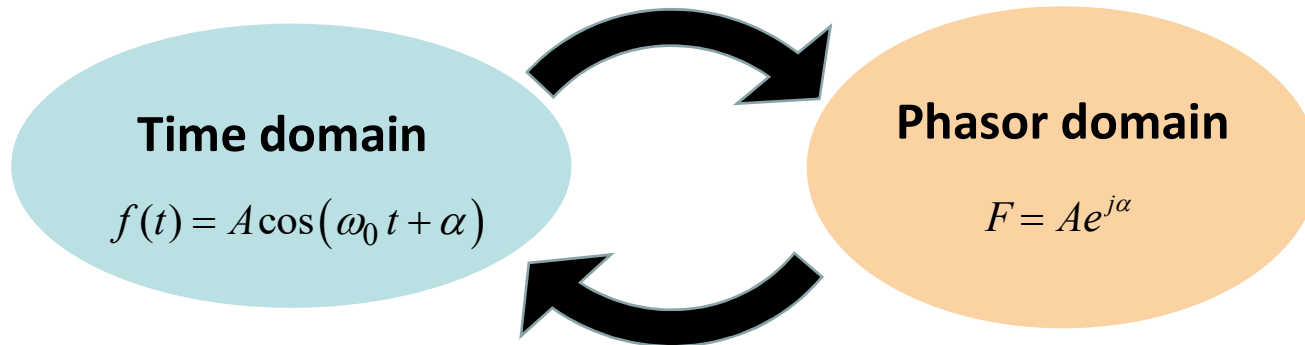


2) Time domain derivative and Phasors

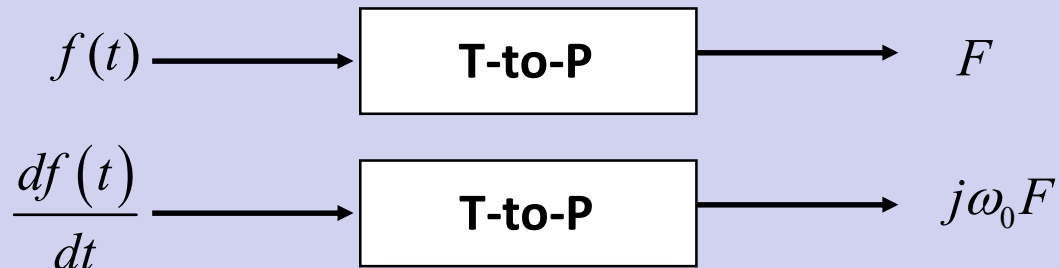

Phasors

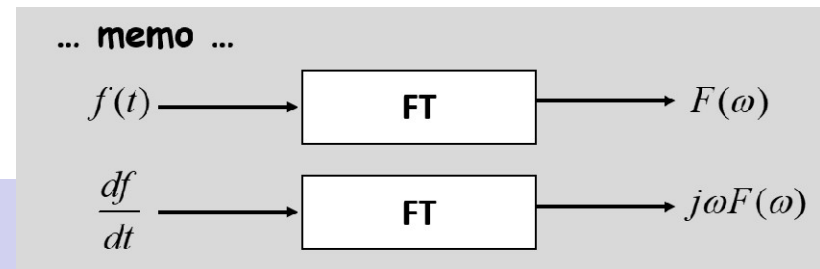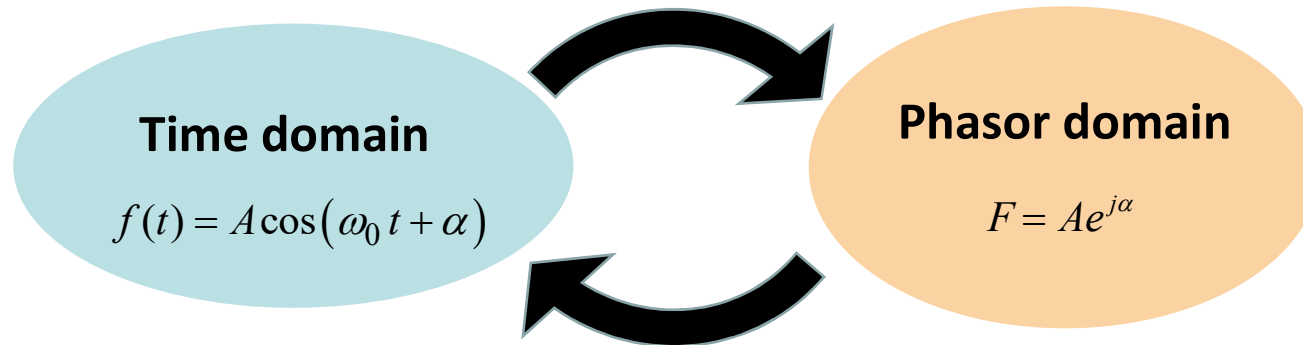

2) Time domain derivative and Phasors

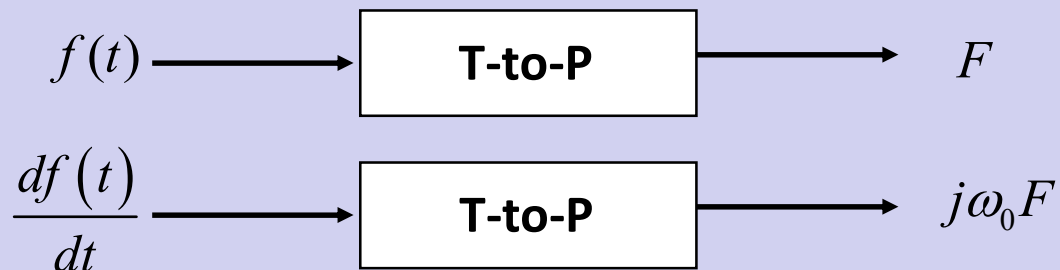

ω_0 now is fixed!