

Campi Elettromagnetici

**Corso di Laurea in Ingegneria Informatica,
Biomedica e delle Telecomunicazioni**

a.a. 2020-2021 - Laurea “Triennale” – Secondo semestre - Secondo anno

Università degli Studi di Napoli “Parthenope”

Stefano Perna

Color legend

New formulas, important considerations,
important formulas, important concepts

Very important for the discussion

Memo

Mathematical tools to be exploited

Mathematics

Plane Waves

Time domain (TD)

Spectral domains

Phasor Domain (PD)

Fourier Domain (FD)

Dispersive media: attenuation, distortion, phase velocity and group velocity

General expression of plane waves (PD)

Incidence (PD)

Plane Waves

General expression of plane waves (PD)

Plane Waves (Spectral Domains)

$$\begin{cases} \frac{dE_x}{dz} = -j\omega_0\mu H_y \\ \frac{dH_y}{dz} = -j\omega_0\varepsilon E_x \end{cases} \quad \{E_x, H_y\}$$

$$\frac{d^2 E_x}{dz^2} + k^2 E_x = 0$$

$$\begin{cases} k = \omega\sqrt{\mu\varepsilon} \\ k = \beta - j\alpha \end{cases}$$

$$\zeta = \sqrt{\frac{\mu}{\varepsilon}}$$

$$E_x(z) = E_x^+ e^{-jkz} + E_x^- e^{jkz}$$

$$\zeta H_y(z) = E_x^+ e^{-jkz} - E_x^- e^{jkz}$$

$$\begin{cases} \varepsilon(\omega_0) = \varepsilon_1(\omega_0) - j\varepsilon_2(\omega_0) \\ \mu(\omega_0) = \mu_1(\omega_0) - j\mu_2(\omega_0) \end{cases}$$

$$k(\omega_0) = \omega_0 \sqrt{\mu(\omega_0)\varepsilon(\omega_0)}$$

$$k(\omega_0) = \beta(\omega_0) - j\alpha(\omega_0)$$

Phasor Domain

$$\begin{cases} \frac{dE_x}{dz} = -j\omega\mu H_y \\ \frac{dH_y}{dz} = -j\omega\varepsilon E_x \end{cases} \quad \{E_x, H_y\}$$

$$\frac{d^2 E_x}{dz^2} + k^2 E_x = 0$$

$$E_x(z, \omega) = E_x^+(\omega) e^{-jkz} + E_x^-(\omega) e^{jkz}$$

$$\zeta H_y(z, \omega) = E_x^+(\omega) e^{-jkz} - E_x^-(\omega) e^{jkz}$$

$$\begin{cases} \varepsilon(\omega) = \varepsilon_1(\omega) - j\varepsilon_2(\omega) \\ \mu(\omega) = \mu_1(\omega) - j\mu_2(\omega) \end{cases}$$

$$k(\omega) = \omega \sqrt{\mu(\omega)\varepsilon(\omega)}$$

$$k(\omega) = \beta(\omega) - j\alpha(\omega)$$

Fourier Domain

Source-free

Medium

- Linear
- **Time dispersive**
- Space non-dispersive
- Isotropic
- Homogeneous (TI - SI)
- ~~- Lossless~~

$$\frac{\partial}{\partial x} = \frac{\partial}{\partial y} = 0$$

$$\vec{e}(\vec{r}, t) = \vec{e}(z, t)$$

$$\vec{h}(\vec{r}, t) = \vec{h}(z, t)$$



$$E_z = H_z = 0$$

$$\{E_y, H_x\}$$

Independent

$$\{E_x, H_y\}$$

each other

Plane Waves (Spectral Domains)

$$\begin{cases} \frac{dE_x}{dz} = -j\omega_0\mu H_y \\ \frac{dH_y}{dz} = -j\omega_0\varepsilon E_x \end{cases} \quad \{E_x, H_y\}$$

$$\frac{d^2 E_x}{dz^2} + k^2 E_x = 0$$

$$k = \omega\sqrt{\mu\varepsilon}$$

$$k = \beta - j\alpha$$

$$\zeta = \sqrt{\frac{\mu}{\varepsilon}}$$

$$E_x(z) = E_x^+ e^{-jkz} + E_x^- e^{jkz}$$

$$\zeta H_y(z) = E_x^+ e^{-jkz} - E_x^- e^{jkz}$$

$$\begin{cases} \varepsilon(\omega_0) = \varepsilon_1(\omega_0) - j\varepsilon_2(\omega_0) \\ \mu(\omega_0) = \mu_1(\omega_0) - j\mu_2(\omega_0) \end{cases}$$

$$k(\omega_0) = \omega_0 \sqrt{\mu(\omega_0)\varepsilon(\omega_0)}$$

$$k(\omega_0) = \beta(\omega_0) - j\alpha(\omega_0)$$

Phasor Domain

Source-free

Medium

- Linear
- **Time dispersive**
- Space non-dispersive
- Isotropic
- Homogeneous (TI - SI)
- ~~- Lossless~~

$$\frac{\partial}{\partial x} = \frac{\partial}{\partial y} = 0$$

$$\vec{e}(\vec{r}, t) = \vec{e}(z, t)$$

$$\vec{h}(\vec{r}, t) = \vec{h}(z, t)$$



$$E_z = H_z = 0$$

$$\{E_y, H_x\}$$

Independent

$$\{E_x, H_y\}$$

each other

Plane Waves (Spectral Domains)

$$\begin{cases} \frac{dE_x}{dz} = -j\omega_0\mu H_y \\ \frac{dH_y}{dz} = -j\omega_0\varepsilon E_x \end{cases} \quad \{E_x, H_y\}$$

$$\frac{d^2 E_x}{dz^2} + k^2 E_x = 0$$

$$k = \omega\sqrt{\mu\varepsilon}$$

$$k = \beta - j\alpha$$

$$\zeta = \sqrt{\frac{\mu}{\varepsilon}}$$

$$E_x^+(z) = E^+ e^{-jkz}$$

$$\zeta H_y^+(z) = E^+ e^{-jkz}$$

$$\begin{cases} \varepsilon(\omega_0) = \varepsilon_1(\omega_0) - j\varepsilon_2(\omega_0) \\ \mu(\omega_0) = \mu_1(\omega_0) - j\mu_2(\omega_0) \end{cases}$$

$$k(\omega_0) = \omega_0 \sqrt{\mu(\omega_0)\varepsilon(\omega_0)}$$

$$k(\omega_0) = \beta(\omega_0) - j\alpha(\omega_0)$$

Phasor Domain

- Source-free**
- Medium**
- Linear
 - **Time dispersive**
 - Space non-dispersive
 - Isotropic
 - Homogeneous (TI - SI)
 - ~~- Lossless~~

$$\frac{\partial}{\partial x} = \frac{\partial}{\partial y} = 0$$

$$\vec{e}(\vec{r}, t) = \vec{e}(z, t)$$

$$\vec{h}(\vec{r}, t) = \vec{h}(z, t)$$

$$E_z = H_z = 0$$

$\{E_y, H_x\}$ Independent each other

$\{E_x, H_y\}$ Independent each other

Plane Waves (Spectral Domains)

$$\begin{cases} \frac{dE_x}{dz} = -j\omega_0\mu H_y \\ \frac{dH_y}{dz} = -j\omega_0\varepsilon E_x \end{cases} \quad \{E_x, H_y\}$$

$$\frac{d^2 E_x}{dz^2} + k^2 E_x = 0$$

$$k = \omega\sqrt{\mu\varepsilon}$$

$$k = \beta - j\alpha$$

$$\zeta = \sqrt{\frac{\mu}{\varepsilon}}$$

$$E_x^+(z) = E^+ e^{-jkz} = E^+ e^{-j\beta z} e^{-\alpha z}$$


$$\zeta H_y^+(z) = E^+ e^{-jkz} = E^+ e^{-j\beta z} e^{-\alpha z}$$

$$\begin{cases} \varepsilon(\omega_0) = \varepsilon_1(\omega_0) - j\varepsilon_2(\omega_0) \\ \mu(\omega_0) = \mu_1(\omega_0) - j\mu_2(\omega_0) \end{cases}$$

$$k(\omega_0) = \omega_0 \sqrt{\mu(\omega_0)\varepsilon(\omega_0)}$$

$$k(\omega_0) = \beta(\omega_0) - j\alpha(\omega_0)$$

Phasor Domain

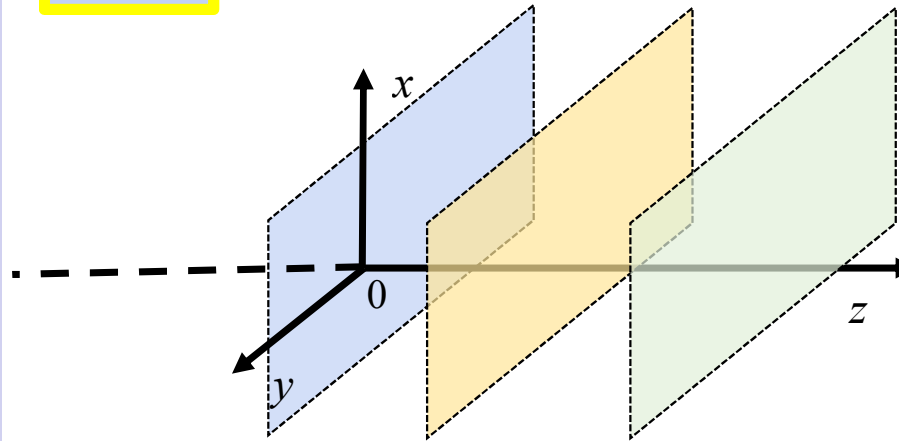

Source-free

Medium

- Linear
- **Time dispersive**
- Space non-dispersive
- Isotropic
- Homogeneous (TI - SI)
- ~~- Lossless~~

$$\frac{\partial}{\partial x} = \frac{\partial}{\partial y} = 0$$

$$\vec{e}(\vec{r}, t) = \vec{e}(z, t)$$

$$\vec{h}(\vec{r}, t) = \vec{h}(z, t)$$



$$E_z = H_z = 0$$

$$\begin{cases} \{E_y, H_x\} \\ \{E_x, H_y\} \end{cases} \quad \text{Independent each other}$$

Plane Waves (Spectral Domains)

$$\begin{cases} \frac{dE_x}{dz} = -j\omega_0\mu H_y \\ \frac{dH_y}{dz} = -j\omega_0\varepsilon E_x \end{cases} \quad \{E_x, H_y\}$$

$$\frac{d^2 E_x}{dz^2} + k^2 E_x = 0$$

$$k = \omega\sqrt{\mu\varepsilon}$$

$$k = \beta - j\alpha$$

$$\zeta = \sqrt{\frac{\mu}{\varepsilon}}$$

$$E_x^+(z) = E^+ e^{-jkz} = E^+ e^{-j\beta z} e^{-\alpha z}$$


$$\zeta H_y^+(z) = E^+ e^{-jkz} = E^+ e^{-j\beta z} e^{-\alpha z}$$

$$\begin{cases} \varepsilon(\omega_0) = \varepsilon_1(\omega_0) - j\varepsilon_2(\omega_0) \\ \mu(\omega_0) = \mu_1(\omega_0) - j\mu_2(\omega_0) \end{cases}$$

$$k(\omega_0) = \omega_0 \sqrt{\mu(\omega_0)\varepsilon(\omega_0)}$$

$$k(\omega_0) = \beta(\omega_0) - j\alpha(\omega_0)$$

Phasor Domain

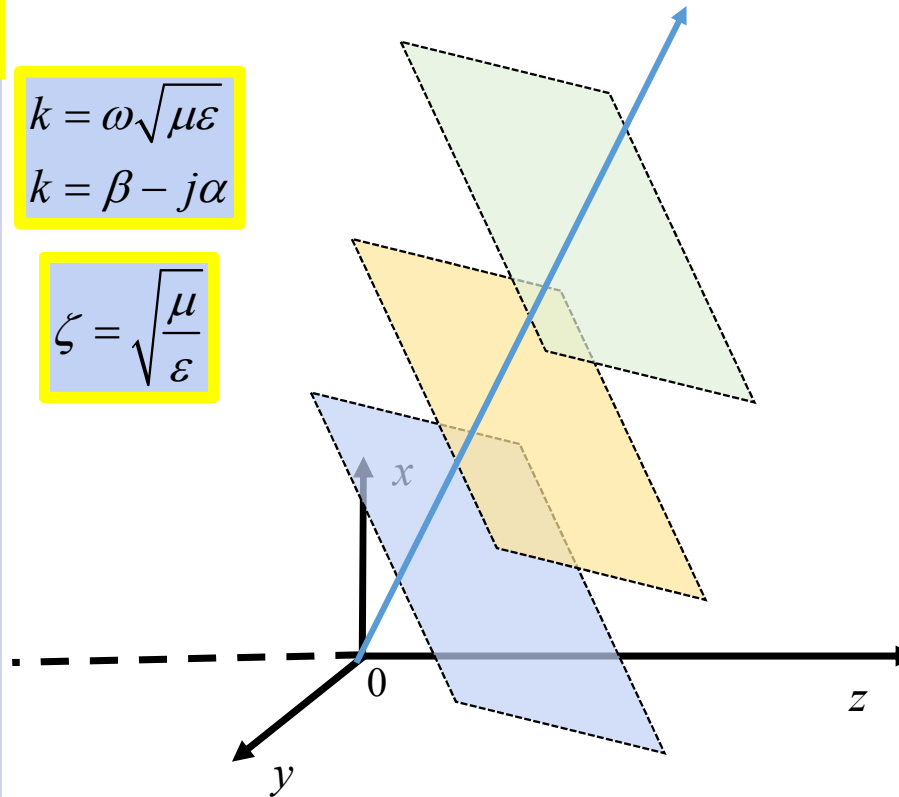

Source-free

Medium

- Linear
- **Time dispersive**
- Space non-dispersive
- Isotropic
- Homogeneous (TI - SI)
- ~~- Lossless~~

$$\frac{\partial}{\partial x} = \frac{\partial}{\partial y} = 0$$

$$\vec{e}(\vec{r}, t) = \vec{e}(z, t)$$

$$\vec{h}(\vec{r}, t) = \vec{h}(z, t)$$



$$E_z = H_z = 0$$

$$\{E_y, H_x\}$$

Independent

$$\{E_x, H_y\}$$

each other

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

$$\frac{\partial}{\partial x} \rightarrow -jk_x \quad \frac{\partial}{\partial y} \rightarrow -jk_y \quad \frac{\partial}{\partial z} \rightarrow -jk_z$$

$$\frac{\partial}{\partial x} \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \frac{\partial}{\partial x} \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z} = -jk_x \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z} = -jk_x \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}}$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\begin{cases} \nabla \times \vec{\mathbf{E}} = -j\omega\mu\vec{\mathbf{H}} \\ \nabla \times \vec{\mathbf{H}} = j\omega\varepsilon\vec{\mathbf{E}} \\ \nabla \cdot \vec{\mathbf{E}} = 0 \\ \nabla \cdot \vec{\mathbf{H}} = 0 \end{cases}$$

$$\frac{\partial}{\partial x} \rightarrow -jk_x \quad \frac{\partial}{\partial y} \rightarrow -jk_y \quad \frac{\partial}{\partial z} \rightarrow -jk_z$$



$$\vec{\mathbf{a}} \times \vec{\mathbf{b}} = \begin{vmatrix} \hat{i}_x & \hat{i}_y & \hat{i}_z \\ a_x & a_y & a_z \\ b_x & b_y & b_z \end{vmatrix}$$

$$\nabla \times \vec{\mathbf{E}} = \begin{vmatrix} \hat{i}_x & \hat{i}_y & \hat{i}_z \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ E_x & E_y & E_z \end{vmatrix}$$

$$\nabla \times \vec{\mathbf{E}} = \begin{vmatrix} \hat{i}_x & \hat{i}_y & \hat{i}_z \\ -jk_x & -jk_y & -jk_z \\ E_x & E_y & E_z \end{vmatrix} = -j\vec{\mathbf{k}} \times \vec{\mathbf{E}}$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}} = -j\omega\mu\vec{\mathbf{H}} \\ \nabla \times \vec{\mathbf{H}} = j\omega\varepsilon\vec{\mathbf{E}} \\ \nabla \cdot \vec{\mathbf{E}} = 0 \\ \nabla \cdot \vec{\mathbf{H}} = 0 \end{array} \right. \rightarrow \left\{ \begin{array}{l} -j\vec{\mathbf{k}} \times \vec{\mathbf{E}} = -j\omega\mu\vec{\mathbf{H}} \\ -j\vec{\mathbf{k}} \times \vec{\mathbf{H}} = j\omega\varepsilon\vec{\mathbf{E}} \\ \dots\dots \\ \dots\dots \end{array} \right.$$

$$\frac{\partial}{\partial x} \rightarrow -jk_x \quad \frac{\partial}{\partial y} \rightarrow -jk_y \quad \frac{\partial}{\partial z} \rightarrow -jk_z$$



$$\vec{\mathbf{a}} \times \vec{\mathbf{b}} = \begin{vmatrix} \hat{i}_x & \hat{i}_y & \hat{i}_z \\ a_x & a_y & a_z \\ b_x & b_y & b_z \end{vmatrix}$$

$$\nabla \times \vec{\mathbf{E}} = \begin{vmatrix} \hat{i}_x & \hat{i}_y & \hat{i}_z \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ E_x & E_y & E_z \end{vmatrix}$$

$$\nabla \times \vec{\mathbf{E}} = \begin{vmatrix} \hat{i}_x & \hat{i}_y & \hat{i}_z \\ -jk_x & -jk_y & -jk_z \\ E_x & E_y & E_z \end{vmatrix} = -j\vec{\mathbf{k}} \times \vec{\mathbf{E}}$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}} = -j\omega\mu\vec{\mathbf{H}} \\ \nabla \times \vec{\mathbf{H}} = j\omega\varepsilon\vec{\mathbf{E}} \\ \nabla \cdot \vec{\mathbf{E}} = 0 \\ \nabla \cdot \vec{\mathbf{H}} = 0 \end{array} \right. \rightarrow \left\{ \begin{array}{l} -j\vec{\mathbf{k}} \times \vec{\mathbf{E}} = -j\omega\mu\vec{\mathbf{H}} \\ -j\vec{\mathbf{k}} \times \vec{\mathbf{H}} = j\omega\varepsilon\vec{\mathbf{E}} \\ \dots\dots \\ \dots\dots \end{array} \right.$$

$$\frac{\partial}{\partial x} \rightarrow -jk_x \quad \frac{\partial}{\partial y} \rightarrow -jk_y \quad \frac{\partial}{\partial z} \rightarrow -jk_z$$



$$\vec{\mathbf{a}} \cdot \vec{\mathbf{b}} = a_x b_x + a_y b_y + a_z b_z$$

$$\nabla \cdot \vec{\mathbf{E}} = \frac{\partial E_x}{\partial x} + \frac{\partial E_y}{\partial y} + \frac{\partial E_z}{\partial z}$$

$$\nabla \cdot \vec{\mathbf{E}} = -jk_x E_x - jk_y E_y - jk_z E_z = -j\vec{\mathbf{k}} \cdot \vec{\mathbf{E}}$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\begin{cases} \nabla \times \vec{\mathbf{E}} = -j\omega\mu\vec{\mathbf{H}} \\ \nabla \times \vec{\mathbf{H}} = j\omega\varepsilon\vec{\mathbf{E}} \\ \nabla \cdot \vec{\mathbf{E}} = 0 \\ \nabla \cdot \vec{\mathbf{H}} = 0 \end{cases} \rightarrow \begin{cases} -j\vec{\mathbf{k}} \times \vec{\mathbf{E}} = -j\omega\mu\vec{\mathbf{H}} \\ -j\vec{\mathbf{k}} \times \vec{\mathbf{H}} = j\omega\varepsilon\vec{\mathbf{E}} \\ -j\vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0 \\ -j\vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0 \end{cases}$$

$$\frac{\partial}{\partial x} \rightarrow -jk_x \quad \frac{\partial}{\partial y} \rightarrow -jk_y \quad \frac{\partial}{\partial z} \rightarrow -jk_z$$



$$\vec{\mathbf{a}} \cdot \vec{\mathbf{b}} = a_x b_x + a_y b_y + a_z b_z$$

$$\nabla \cdot \vec{\mathbf{E}} = \frac{\partial E_x}{\partial x} + \frac{\partial E_y}{\partial y} + \frac{\partial E_z}{\partial z}$$

$$\nabla \cdot \vec{\mathbf{E}} = -jk_x E_x - jk_y E_y - jk_z E_z = -j\vec{\mathbf{k}} \cdot \vec{\mathbf{E}}$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\left\{ \begin{array}{l} \vec{\mathbf{k}} \times \vec{\mathbf{E}} = \omega \mu \vec{\mathbf{H}} \\ \vec{\mathbf{k}} \times \vec{\mathbf{H}} = -\omega \varepsilon \vec{\mathbf{E}} \\ \vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0 \\ \vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0 \end{array} \right.$$

Source-free

$$\left\{ \begin{array}{l} \nabla \times \vec{\mathbf{E}} = -j\omega \mu \vec{\mathbf{H}} \\ \nabla \times \vec{\mathbf{H}} = j\omega \varepsilon \vec{\mathbf{E}} \\ \nabla \cdot \vec{\mathbf{E}} = 0 \\ \nabla \cdot \vec{\mathbf{H}} = 0 \end{array} \right. \rightarrow \left\{ \begin{array}{l} -j\vec{\mathbf{k}} \times \vec{\mathbf{E}} = -j\omega \mu \vec{\mathbf{H}} \\ -j\vec{\mathbf{k}} \times \vec{\mathbf{H}} = j\omega \varepsilon \vec{\mathbf{E}} \\ -j\vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0 \\ -j\vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0 \end{array} \right.$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\left\{ \begin{array}{l} \vec{\mathbf{k}} \times \vec{\mathbf{E}} = \omega \mu \vec{\mathbf{H}} \\ \vec{\mathbf{k}} \times \vec{\mathbf{H}} = -\omega \varepsilon \vec{\mathbf{E}} \\ \vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0 \\ \vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0 \end{array} \right.$$

Source-free

$$\rightarrow \left\{ \begin{array}{l} -j\vec{\mathbf{k}} \times \vec{\mathbf{E}} = -j\omega \mu \vec{\mathbf{H}} \\ -j\vec{\mathbf{k}} \times \vec{\mathbf{H}} = j\omega \varepsilon \vec{\mathbf{E}} \\ -j\vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0 \\ -j\vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0 \end{array} \right.$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\vec{\mathbf{k}} \times \vec{\mathbf{E}} = \omega \mu \vec{\mathbf{H}}$$

$$\vec{\mathbf{k}} \times \vec{\mathbf{H}} = -\omega \epsilon \vec{\mathbf{E}}$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = \omega^2 \mu \epsilon$$

$$\vec{\mathbf{k}} \times (\vec{\mathbf{k}} \times \vec{\mathbf{E}}) = \omega \mu (\vec{\mathbf{k}} \times \vec{\mathbf{H}}) = \omega \mu (-\omega \epsilon \vec{\mathbf{E}}) = -\omega^2 \mu \epsilon \vec{\mathbf{E}}$$

$$\vec{\mathbf{k}}(\vec{\mathbf{k}} \cdot \vec{\mathbf{E}}) - \vec{\mathbf{E}}(\vec{\mathbf{k}} \cdot \vec{\mathbf{k}})$$

$$-(\vec{\mathbf{k}} \cdot \vec{\mathbf{k}}) \vec{\mathbf{E}} = -\omega^2 \mu \epsilon \vec{\mathbf{E}}$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = \omega^2 \mu \epsilon$$

$$\vec{\mathbf{A}} \times (\vec{\mathbf{B}} \times \vec{\mathbf{C}}) = \vec{\mathbf{B}}(\vec{\mathbf{A}} \cdot \vec{\mathbf{C}}) - \vec{\mathbf{C}}(\vec{\mathbf{A}} \cdot \vec{\mathbf{B}})$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

Source-free

$$\vec{\mathbf{k}} \times \vec{\mathbf{E}} = \omega \mu \vec{\mathbf{H}}$$

$$\vec{\mathbf{k}} \times \vec{\mathbf{H}} = -\omega \varepsilon \vec{\mathbf{E}}$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = \omega^2 \mu \varepsilon$$

$\vec{\mathbf{k}}$: propagation vector

Me MEMO

The electric and magnetic fields are related each other through the following relation:

$$\zeta \vec{\mathbf{h}} = \hat{i}_p \times \vec{\mathbf{e}}$$

where \hat{i}_p points to the propagation direction and $\zeta = \sqrt{\mu/\varepsilon}$

$$\vec{\mathbf{k}} = k_z \hat{i}_z \rightarrow \vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_z z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = k_z^2 \rightarrow k_z^2 = \omega^2 \mu \varepsilon \rightarrow k_z = \omega \sqrt{\mu \varepsilon} = \beta - j\alpha$$

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_z z} = \vec{\mathbf{E}}^+ e^{-j\beta z} e^{-\alpha z}$$

$$\begin{cases} \vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = k_z E_z = 0 \\ \vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = k_z H_z = 0 \end{cases} \rightarrow E_z = H_z = 0$$

$$\omega \mu \vec{\mathbf{H}} = \vec{\mathbf{k}} \times \vec{\mathbf{E}} = k_z \hat{i}_z \times \vec{\mathbf{E}} = \omega \sqrt{\mu \varepsilon} \hat{i}_z \times \vec{\mathbf{E}} \rightarrow \sqrt{\frac{\mu}{\varepsilon}} \vec{\mathbf{H}} = \hat{i}_z \times \vec{\mathbf{E}}$$

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\vec{\mathbf{k}} \times \vec{\mathbf{E}} = \omega \mu \vec{\mathbf{H}}$$

$$\vec{\mathbf{k}} \times \vec{\mathbf{H}} = -\omega \varepsilon \vec{\mathbf{E}}$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = \omega^2 \mu \varepsilon$$

$\vec{\mathbf{k}}$: propagation vector

Medium


- Linear - Isotropic - Space nondispersive - Time dispersive - Lossy

- Homogeneous (Time-invariant & Space-invariant)

$$k = \omega \sqrt{\mu \varepsilon} = \beta - j\alpha$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = \omega^2 \mu \varepsilon = (\beta - j\alpha)^2 \quad \rightarrow \quad \vec{\mathbf{k}} = \vec{\mathbf{k}}_1 - j\vec{\mathbf{k}}_2$$

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-j(\vec{\mathbf{k}}_1 - j\vec{\mathbf{k}}_2) \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}}_1 \cdot \vec{\mathbf{r}}} e^{-\vec{\mathbf{k}}_2 \cdot \vec{\mathbf{r}}}$$



General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\vec{\mathbf{k}} \times \vec{\mathbf{E}} = \omega \mu \vec{\mathbf{H}}$$

$$\vec{\mathbf{k}} \times \vec{\mathbf{H}} = -\omega \varepsilon \vec{\mathbf{E}}$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = \omega^2 \mu \varepsilon$$

$\vec{\mathbf{k}}$: propagation vector

Medium

- Linear - Isotropic - Space nondispersive - Time dispersive - Lossy

- Homogeneous (Time-invariant & Space-invariant)

$$k = \omega \sqrt{\mu \varepsilon} = \beta - j\alpha$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = \omega^2 \mu \varepsilon = (\beta - j\alpha)^2 \quad \Rightarrow \quad \vec{\mathbf{k}} = \vec{\mathbf{k}}_1 - j\vec{\mathbf{k}}_2$$

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-j(\vec{\mathbf{k}}_1 - j\vec{\mathbf{k}}_2) \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}}_1 \cdot \vec{\mathbf{r}}} e^{-\vec{\mathbf{k}}_2 \cdot \vec{\mathbf{r}}}$$




The wave propagates along $\vec{\mathbf{k}}_1$

The wave attenuates along $\vec{\mathbf{k}}_2$

$$\vec{\mathbf{k}}_1 \cdot \vec{\mathbf{r}} = \text{const} \Rightarrow \text{equi-phase planes}$$


$$\vec{\mathbf{k}}_2 \cdot \vec{\mathbf{r}} = \text{const} \Rightarrow \text{equi-amplitude planes}$$

General expression of plane waves (PD)

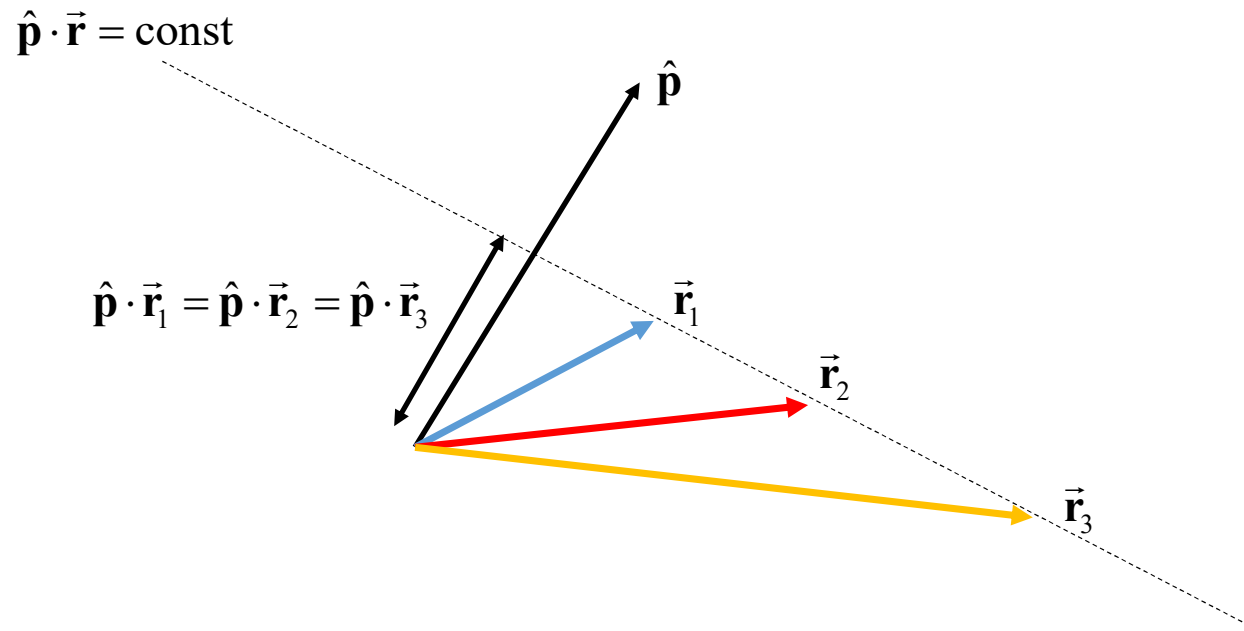


General expression of plane waves (PD)

$$\hat{\mathbf{p}} \cdot \vec{\mathbf{r}} = \text{const}$$

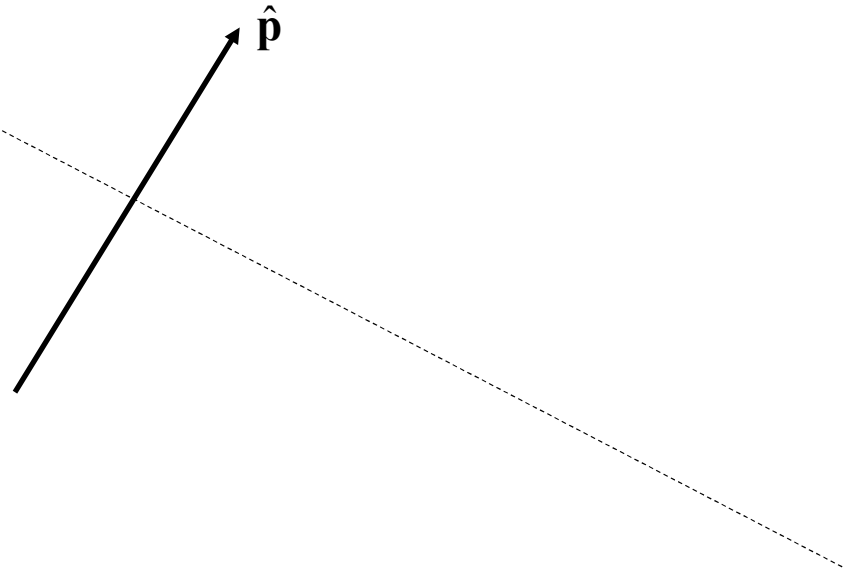

General expression of plane waves (PD)

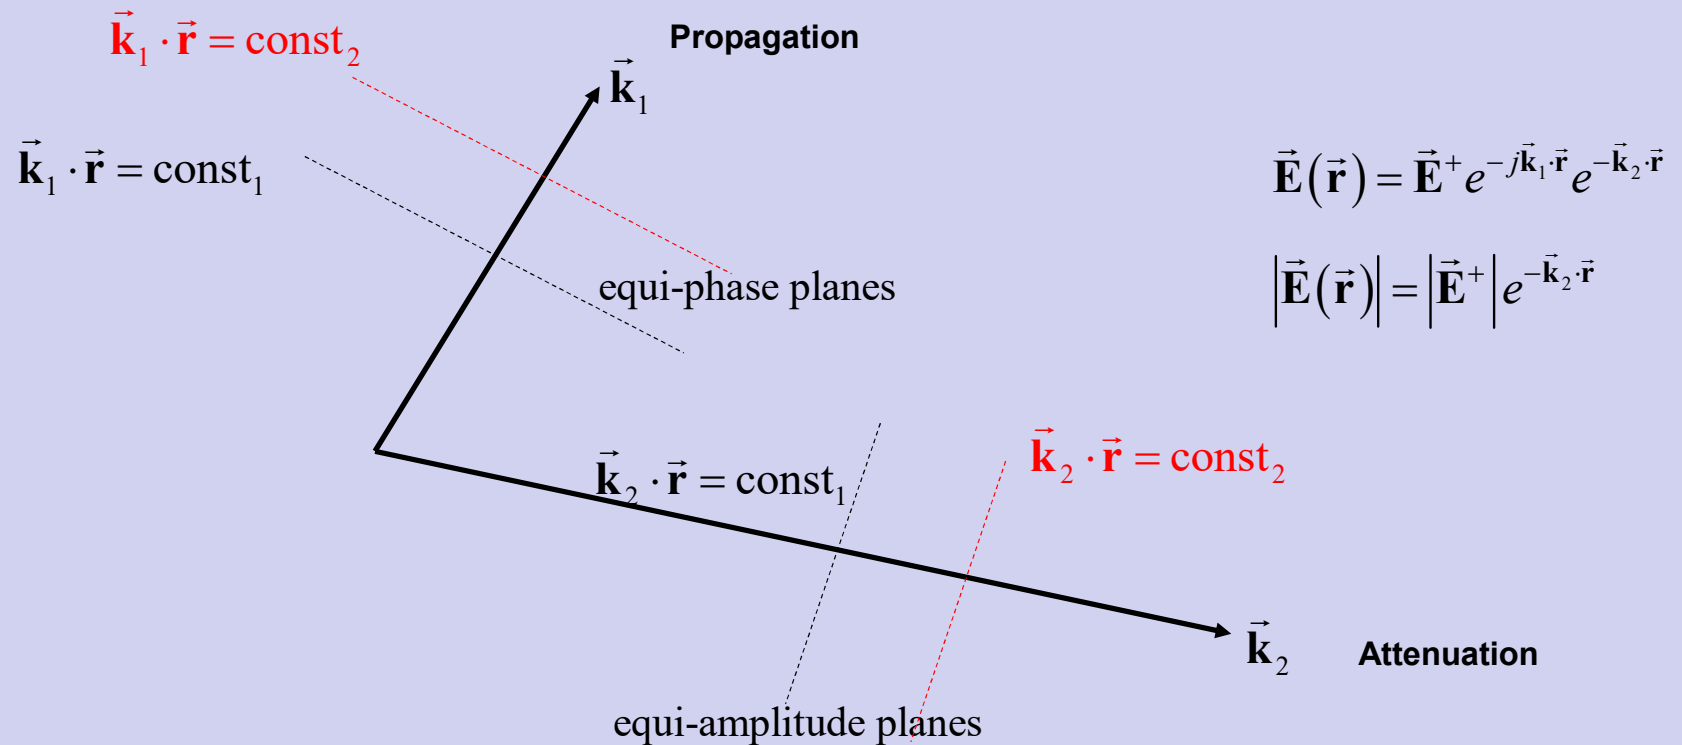

When \vec{k}_1 and \vec{k}_2 are proportional, equi-amplitude and equi-phase planes become coincident: the plane wave is said **HOMOGENEOUS**

More generally, equi-amplitude and equi-phase planes may be not coincident: in this the plane wave is said **NOT-HOMOGENEOUS**

General expression of plane waves (PD)

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{H}}(\vec{\mathbf{r}}) = \vec{\mathbf{H}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{H}}^+ e^{-jk_x x} e^{-jk_y y} e^{-jk_z z}$$

$$\vec{\mathbf{k}} = k_x \hat{i}_x + k_y \hat{i}_y + k_z \hat{i}_z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_x x + k_y y + k_z z$$

$$\vec{\mathbf{r}} = x \hat{i}_x + y \hat{i}_y + z \hat{i}_z$$

Source-free

$$\vec{\mathbf{k}} \times \vec{\mathbf{E}} = \omega \mu \vec{\mathbf{H}}$$

$$\vec{\mathbf{k}} \times \vec{\mathbf{H}} = -\omega \epsilon \vec{\mathbf{E}}$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{E}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{H}} = 0$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = \omega^2 \mu \epsilon$$

$\vec{\mathbf{k}}$: propagation vector

Medium

- Linear - Isotropic - Space nondispersive - Time dispersive - Lossy

- Homogeneous (Time-invariant & Space-invariant)


$$k = \omega \sqrt{\mu \epsilon} = \beta - j\alpha$$

$$\vec{\mathbf{k}} = k_z \hat{i}_z \Rightarrow \vec{\mathbf{k}} \cdot \vec{\mathbf{r}} = k_z z$$

$$\vec{\mathbf{k}} \cdot \vec{\mathbf{k}} = k_z^2 \Rightarrow k_z^2 = \omega^2 \mu \epsilon \Rightarrow k_z = \omega \sqrt{\mu \epsilon} = \beta - j\alpha$$

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}) = \vec{\mathbf{E}}^+ e^{-j\vec{\mathbf{k}} \cdot \vec{\mathbf{r}}} = \vec{\mathbf{E}}^+ e^{-jk_z z} = \vec{\mathbf{E}}^+ e^{-j\beta z} e^{-\alpha z}$$

$$\vec{\mathbf{k}} = (\beta - j\alpha) \hat{i}_z = \beta \hat{i}_z - j\alpha \hat{i}_z = \vec{\mathbf{k}}_1 - j\vec{\mathbf{k}}_2$$



HOMOGENEOUS PLANE-WAVE